




Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

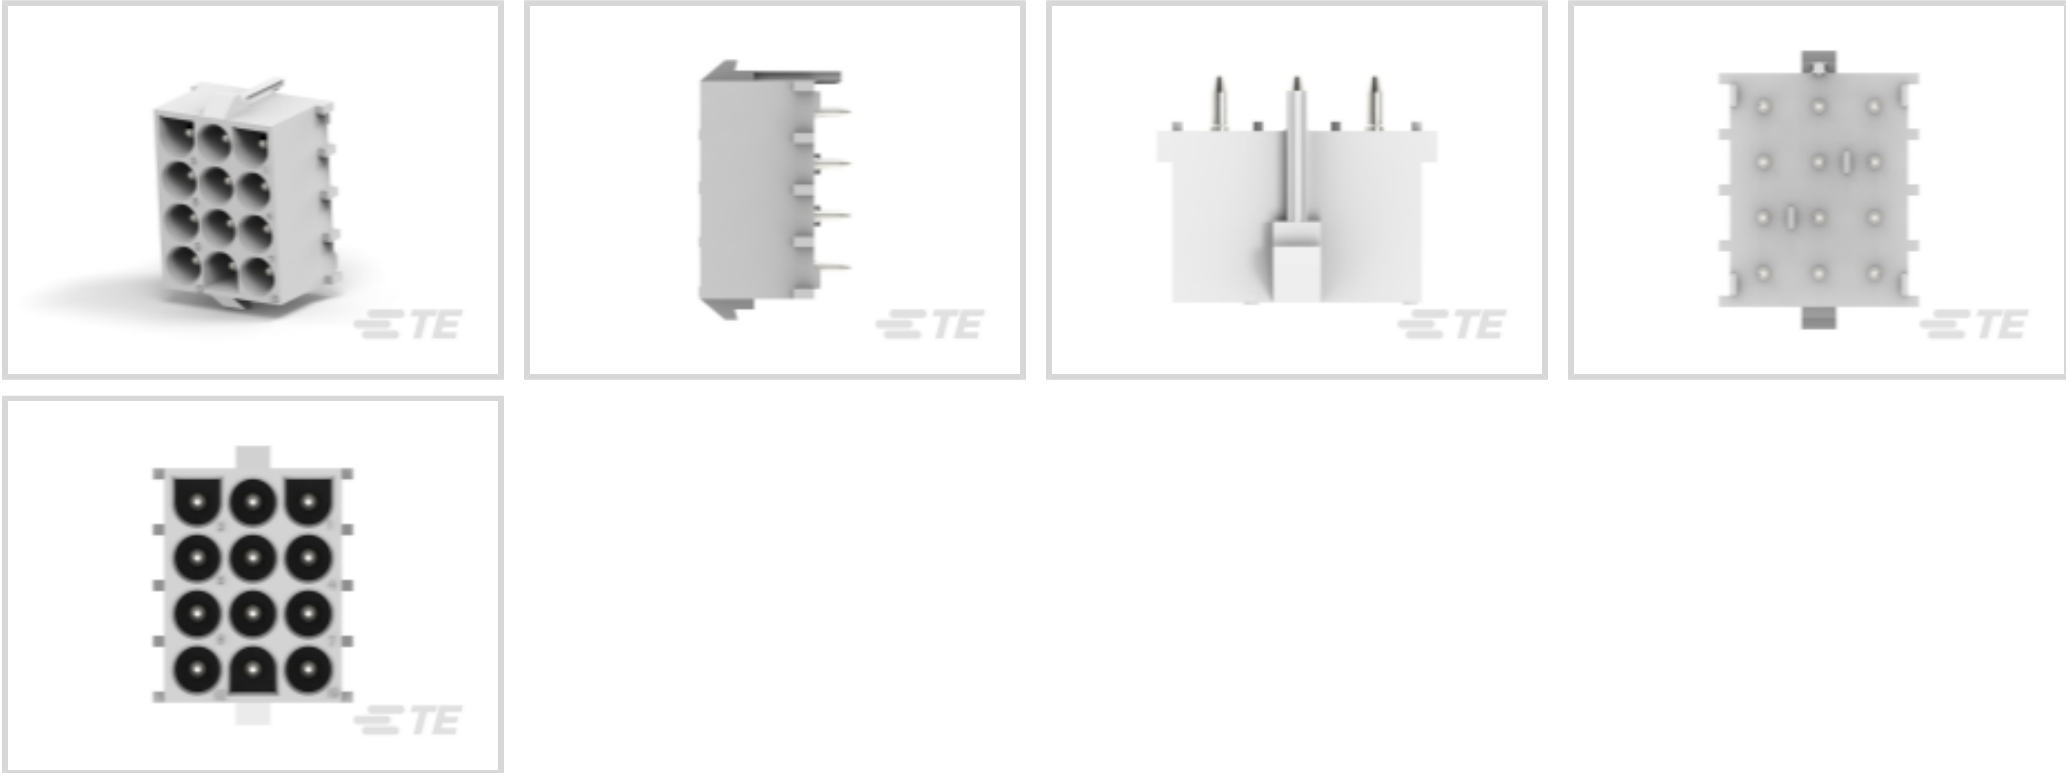

Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Board**

Number of Positions: **12**

Centerline (Pitch): **600 mm [36 in]**

Features

Product Type Features

Rectangular Power Connector Type	Header
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	12
PCB Mount Orientation	Vertical

Contact Features

Contact Layout	Matrix
Contact Current Rating (Max)	36 A
Contact Type	Pin
PCB Contact Termination Area Plating Material	Silver
Contact Mating Area Plating Material	Silver



Contact Mating Area Plating Material Thickness	5.08 – 10.16 µm[200 – 400 µin]
Contact Termination Area Plating Thickness	5.08 µm[200 µin]

Termination Features

Termination Post & Tail Length	3.69 mm[.145 in]
Termination Method to Wire & Cable	Solder
Termination Method to Printed Circuit Board	Through Hole - Solder

Mechanical Attachment

PCB Mount Alignment Type	Standard Polarized Tail
Strain Relief	Without
Mating Alignment Type	Polarization
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	Without
Connector Mounting Type	Board Mount
Mating Retention	With
Mating Retention Type	Locking Tab

Housing Features

Centerline (Pitch)	600 mm[36 in]
Housing Color	White
Housing Material	Nylon GF

Dimensions

Row-to-Row Spacing	6.35 mm[.25 in]
Width	20.32 mm
PCB Thickness (Recommended)	1.57 mm[.062 in]
Height	14.73 mm
Length	26.67 mm

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Assembly Integration Feature	Without
Circuit Application	Power

Industry Standards



CSA Rating	Certified
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire
Agency/Standard Number	E28476
Agency/Standard	CSA, UL
UL Rating	Recognized
CSA File Number	LR16455
VDE Tested	Yes

Packaging Features

Packaging Method	Bag
Packaging Quantity	25

Other

For Use With	Plug with High Current Socket Contacts
--------------	--

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 770022-1
12P UMNLI IN-LNE PLUG HSG KIT

Customers Also Bought

TE Part #1-5747299-6
D-Sub Receptacle Assembly: Vertical, Shell Size 2, 2.74mm

TE Part #1-5747301-6
D-Sub Receptacle Assembly: Vertical, Shell Size 4, 2.77mm

TE Part #1-5227161-6
BNC Right Angle M Jack RF Connector, 50 Ohm, Bayonet Coupling Mechanism

TE Part #747375-8
D-Sub Plug Assembly: Vertical, Shell Size 4, 2.74mm

TE Part #1-1879216-7
CPF 0402 73K2 0.1% 25PPM 1K RL

TE Part #1-207528-0
SKT HDR ASSY, 12P, MMATE LF

TE Part #1318164-1
BATTERY HOLDER ASSY FOR ML614

TE Part #1-5745967-6
D-Sub Receptacle Assembly: Vertical, Shell Size 3, 2.77mm

TE Part #104477-6
80 SYSTEM 50 HDR DRRA SHRD

TE Part #1375794-2
PC104 ASY 2S/0 UNKEYED

Documents

Product Drawings
PIN ASSY..070
English



CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_194014-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_194014-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_194014-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_SOCKET_CONNECTORS_STANDARD_DENSITY

English

Product Specifications

Application Specification

English

Agency Approvals

VDE Certificate

English