




HPI

TE Internal #: 1-1775469-5

HPI, PCB Mount Header, Right Angle, Wire-to-Board, 15 Position, 2mm [.079in] Centerline, 1 Row, Tin, Natural Housing Color, Fully Shrouded

[View on TE.com >](#)

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Headers & Receptacles > AMP HPI 2.0MM HEADERS

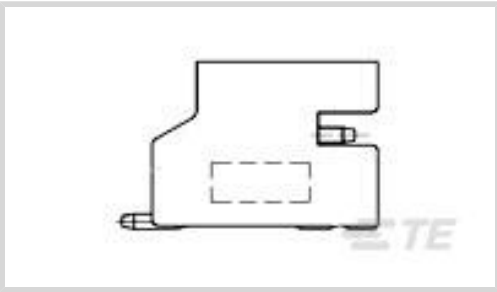

PCB Connector Assembly Type: **PCB Mount Header**

PCB Mount Orientation: **Right Angle**

Connector System: **Wire-to-Board**

Number of Positions: **15**

Centerline (Pitch): **2 mm [.079 in]**

[All AMP HPI 2.0MM HEADERS \(198\)](#)

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Right Angle
Number of Positions	15
Number of Rows	1

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Contact Features

Contact Layout	Inline
Contact Mating Area Length	3.53 mm[.139 in]
Mating Square Post Dimension	.5 mm[.02 in]
Contact Retention Within Housing	Without
PCB Contact Termination Area Plating Material Thickness	2 μm[80 μin]



PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Square
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Nickel
Contact Base Material	Brass
Contact Mating Area Plating Material	Tin
Contact Mating Area Plating Material Finish	Matte
Contact Type	Pin
Contact Current Rating (Max)	3 A

Termination Features

Square Termination Post & Tail Dimension	.5 mm[.02 in]
Termination Post & Tail Length	1 mm[.039 in]
Termination Method to Printed Circuit Board	Surface Mount

Mechanical Attachment

Strain Relief	Without
Mating Alignment Type	Polarization
Mating Alignment	With
PCB Mount Retention Type	Solder Peg
PCB Mount Alignment	Without
Mating Retention	Without
PCB Mount Retention	With
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	2 mm[.079 in]
Housing Color	Natural
Housing Material	PA 9T GF

Dimensions

Connector Length	33.4 mm[1.315 in]
Connector Height	5.5 mm[.217 in]
Connector Width	7.6 mm[.299 in]
Wire Size	.05 mm²

Usage Conditions

--	--



Operating Temperature Range	-25 – 85 °C[-13 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	600
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts





TE Part # CAT-H857-H817220
AMP HPI 2.0MM RECEPTACLE
HOUSINGS

Also in the Series


HPI



Wire-to-Board Connector Assemblies
& Housings(93)



Wire-to-Board Connector Contacts(2)

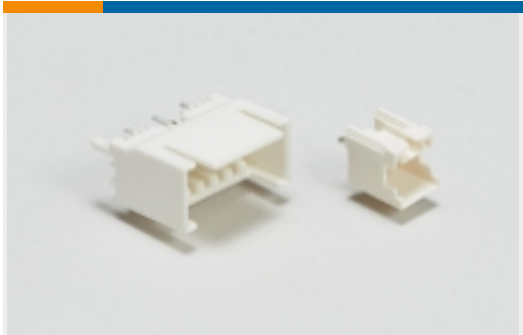

Wire-to-Board Headers & Receptacles
(138)

Customers Also Bought



TE Part #1676322-2
RN 0805 3K01 0.1% 10PPM 1KRL



TE Part #1623173-1
CRG0805 1% 2K0



TE Part #1676290-3
RN 0805 2K49 0.1% 10PPM 5KRL



TE Part #1676294-2
RN 0805 2K74 0.1% 10PPM 1KRL




TE Part #1-440129-5
AMP HPI 2.0MM RECEPTACLE
HOUSINGS




TE Part #1565357-5
ON TAPING(EMBOSS) 0.5MM PITCH



TE Part #1007079-1
CONTACT MICROPHONE CM-01

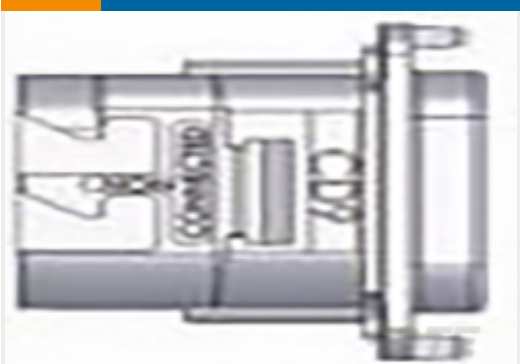

TE Part #ZPF000000000107612
DMC-MD 24 N-K-S-T

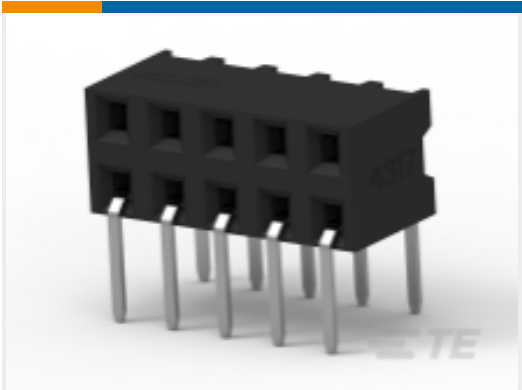

TE Part #1-2314915-4
14P,2MM,B-B,REC,DRHZ,2.1,SN,TB



TE Part #1-1969570-2
ASSY,HDR,VERT,GWT,BOSSED,DUAL
ROW, EP2.5



Documents

Product Drawings

HPI CONN., 2.0MM, R/A, SMT, 15P, 80U"

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1775469-5_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1775469-5_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1775469-5_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

HPI Connectors QRG

English

Product Specifications

Application Specification

English

Product Environmental Compliance

MD_1-1775469-5_01302018150_dmtec

English

MD_1-1775469-5_01302018150_dmtec

English

Agency Approvals

UL

English