RT114006 - ACTIVE

SCHRACK | SCHRACK Power PCB Relay RT1

TE Internal #: 1393239-8 SCHRACK Power PCB Relay RT1, Power Relays, Standard, Monostable, DC, 300 – 400mW Coil Power Rating Class, 400mW Coil Power Rating DC

View on TE.com >

Relays, Contactors & Switches > Relays > Power Relays



Power Relay Type: Standard

Coil Magnetic System: Monostable, DC

Coil Power Rating Class: 300 – 400 mW

Coil Power Rating DC: 400 mW

Coil Resistance: 90 Ω

Features

Product Type Features

 Power Relay Type
 Standard

 Electrical Characteristics
 V

 Insulation Initial Dielectric Between Coil & Contact Class
 4000 V



Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Contact Limiting Making Current	25 A
Contact Limiting Short-Time Current	12 A
Contact Limiting Continuous Current	12 A
Insulation Creepage Class	8 mm
Insulation Initial Dielectric Between Contacts & Coil	5000 Vrms
Insulation Creepage Between Contact & Coil	10 mm[.394 in]
Contact Limiting Breaking Current	12 A
Coil Magnetic System	Monostable, DC
Coil Power Rating Class	300 – 400 mW
Coil Power Rating DC	400 mW
Coil Resistance	90 Ω
Coil Special Features	UL Coil Insulation Class F
Coil Voltage Rating	6 VDC
Contact Switching Voltage (Max)	400 VAC

SCHRACK Power PCB Relay RT1, Power Relays, Standard, Monostable, DC, 300 – 400mW Coil Power Rating Class, 400mW Coil Power Rating DC



Body Features	
Insulation Special Features	Tracking Index of Relay Base PTI250
Product Weight	14 g[.494 oz]
Contact Features	
Contact Arrangement	1 Form C (CO)
Contact Current Class	10 – 20 A, 16 A
Contact Current Rating (Max)	12 A
Contact Material	AgNi90/10
Contact Number of Poles	1
Terminal Type	PCB-THT, Plug-In
Mechanical Attachment	
Relay Mounting Type	Printed Circuit Board
Dimensions	
Length Class (Mechanical)	25 – 30 mm
Insulation Clearance Class	8 mm
Height Class (Mechanical)	15 – 16 mm
Insulation Clearance Between Contact & Coil	10 mm[.394 in]
Width Class (Mechanical)	12 – 16 mm
Product Width	12.7 mm[.5 in]
Product Length	29 mm[1.142 in]
Product Height	15.7 mm[.618 in]
Usage Conditions	
Environmental Ambient Temperature Class	70 – 85 °C
Environmental Ambient Temperature (Max)	85 °C[185 °F]
Packaging Features	
Packaging Method	Box & Tube, Carton
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

C For support call+1 800 522 6752

SCHRACK Power PCB Relay RT1, Power Relays, Standard, Monostable, DC, 300 – 400mW Coil Power Rating Class, 400mW Coil Power Rating DC




China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

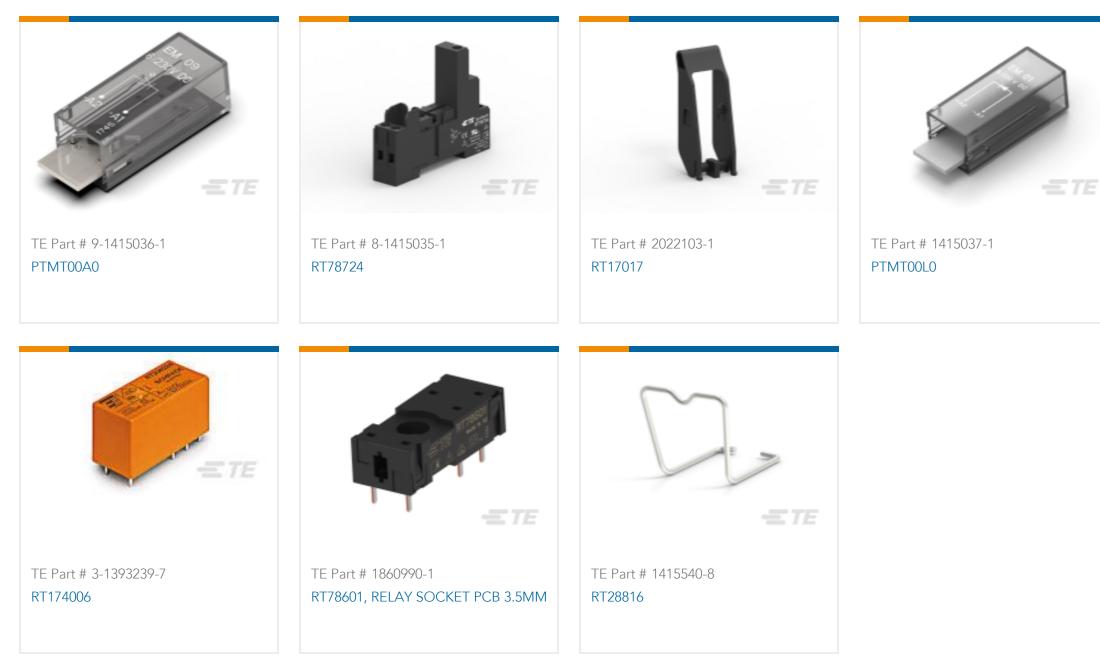

Also in the Series | SCHRACK Power PCB Relay RT1

SCHRACK Power PCB Relay RT1, Power Relays, Standard, Monostable, DC, 300 – 400mW Coil Power Rating Class, 400mW Coil Power Rating DC



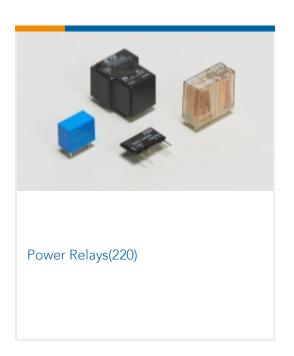

Customers Also Bought



CBT 1/2 5% 47R	LR1 1% 30K	LR1 1% 464R	LR1 1% 180R
ETE	BR		
TE Part #1393845-4 RP821012	TE Part #1-770969-0 06P MINI UMNL R/A HDR ASSY SN		

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1393239-8_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1393239-8_E.3d_igs.zip

SCHRACK Power PCB Relay RT1, Power Relays, Standard, Monostable, DC, 300 – 400mW Coil Power Rating Class, 400mW Coil Power Rating DC



English

Customer View Model ENG_CVM_CVM_1393239-8_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Power PCB Relay RT1

English

Industrial Relays Quick Reference Guide

English

Industrial Relays Quick Reference Guide

Japanese

Industrial Relays Quick Reference Guide

Product Specifications

Definitions, Handling, Processing, Testing and Use of Relays

English

Agency Approvals VDE Certificate

English