

DDR2 SO DIMM

TE Internal #: 1473006-4 DDR2 SO DIMM, SO DIMM Sockets, Double Data Rate (DDR) 2, Stack Height .205 in [5.2 mm], Right Angle Module Orientation, Surface Mount, Cable-to-Board

View on TE.com >

Connectors > Socket Connectors > Memory Sockets > SO DIMM Sockets > DDR2 SO DIMM Sockets



DRAM Type: Double Data Rate (DDR) 2

Stack Height: 5.2 mm [.205 in]

Module Orientation: Right Angle

PCB Mounting Style: Surface Mount

Connector System: Cable-to-Board

All DDR2 SO DIMM Sockets (30)



Features

Product Ty	pe Features
-------------------	-------------

DRAM Type	Double Data Rate (DDR) 2	
Connector System	Cable-to-Board	
Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
Product Type	Socket	
Configuration Features		
Number of Bays	2	
Center Key	None	
Number of Keys	1	
Module Orientation	Right Angle	
Number of Positions	200	
Number of Rows	2	
Keying	Reverse	

C For support call+1 800 522 6752

DDR2 SO DIMM, SO DIMM Sockets, Double Data Rate (DDR) 2, Stack Height .205 in [5.2 mm], Right Angle Module Orientation, Surface Mount, Cable-to-Board



Electrical Characteristics	
DRAM Voltage	1.8 V
Signal Characteristics	
SGRAM Voltage	1.8 V
Body Features	
Ejector Location	Both Ends
Latch Material	Stainless Steel
Latch Plating Material	Tin
Module Key Type	SGRAM
Ejector Type	Locking
Connector Profile	Standard
Contact Features	
Socket Style	SO DIMM
PCB Contact Termination Area Plating Material	Gold Flash
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold Flash
Contact Current Rating (Max)	.5 A

Socket	Туре
--------	------

Memory Card

Termination Features		
Insertion Style	Cam-In	
Mechanical Attachment		
PCB Mount Retention	With	
PCB Mount Retention Type	Solder Peg	
PCB Mounting Style	Surface Mount	
Connector Mounting Type	Board Mount	
Housing Features		
Centerline (Pitch)	.6 mm[.024 in]	
Housing Color	Black	
Housing Material	High Temperature Thermoplastic	
Dimensions		
Stack Height	5.2 mm[.205 in]	

DDR2 SO DIMM, SO DIMM Sockets, Double Data Rate (DDR) 2, Stack Height .205 in [5.2 mm], Right Angle Module Orientation, Surface Mount, Cable-to-Board



Row-to-Row Spacing	6.2 mm[.244 in]
Usage Conditions	
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Semi-Hard Tray Assembly
Packaging Quantity	20
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211)

Halogen Content

Solder Process Capability

(211) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


& For support call+1 800 522 6752

DDR2 SO DIMM, SO DIMM Sockets, Double Data Rate (DDR) 2, Stack Height .205 in [5.2 mm], Right Angle Module Orientation, Surface Mount, Cable-to-Board





Also in the Series DDR2 SO DIMM

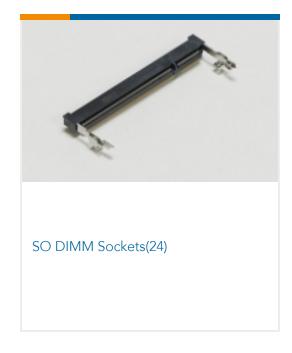

Customers Also Bought



=TE	ÉTE	=TE	
TE Part #1612618-4	TE Part #1393788-3	TE Part #1489951-1	TE Part #1571983-1
DDR2 SO DIMM Sockets	AXICOM P2 STANDARD	XFP Cage Assemblies and Kits	GDH02S04=DIP SWITCH



Documents

Product Drawings SEMI-HARD TRAY DDR2 SODIMM SOCKET 200P 5

English

CAD Files

3D PDF

3D

DDR2 SO DIMM, SO DIMM Sockets, Double Data Rate (DDR) 2, Stack Height .205 in [5.2 mm], Right Angle Module Orientation, Surface Mount, Cable-to-Board



Customer View Model

ENG_CVM_CVM_1473006-4_M1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_1473006-4_M1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1473006-4_M1.3d_igs.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Product Specification

English

Product Environmental Compliance TE Material Declaration

English