

Agastat | Agastat 7000 TE Internal #: 4-1423166-9 Agastat 7000, Time Delay Relays, Knob, 48VDC Time Delay Relay Input Voltage, Timing Range (Off-Time) 60 – 600 seconds View on TE.com >



Relays, Contactors & Switches > Relays > Time Delay Relays



Type of Control: Knob Time Delay Relay Input Voltage: 48 VDC Timing Range (Off-Time): 60 – 600 seconds Time Delay Relay Contact Current Rating: 10A@240VAC A Mode of Operation: Off-Delay

Features

Product Type Features

Product Type	Relay
Relay Type	Time Delay
Product Category	Electromechanical Relays

Magnetic Blow-Out Device	Without
Configuration Features	
Multiple Timing Ranges	Without
Electrical Characteristics	
Actuating System	DC
Time Delay Relay Input Voltage	48 VDC
Timing Range (Off-Time)	60 – 600 seconds
Contact Features	
Contact Arrangement	4 Form C, 4PDT, 4 C/O
Type of Control	Knob
Time Delay Relay Contact Current Rating	10A@240VAC A
Termination Features	
Termination Type	Screw Terminals

C For support call+1 800 522 6752

7024NFIV

Agastat 7000, Time Delay Relays, Knob, 48VDC Time Delay Relay Input Voltage, Timing Range (Off-Time) 60 – 600 seconds



Time Delay Relay Mounting Type	Mounting Bracket
Dimensions	
Dimensions (L x W x H) (Approximate)	114.8 x 65.3 x 71.9 mm[4.523 x 2.572 x 2.832 in]
Usage Conditions	
Operating Temperature Range	-30 – 75 °C
Operation/Application	
Option	Transient/Surge Protection
Mode of Operation	Off-Delay
Other	
Repeatability (Max)	±10%
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold

Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC

EU REACH Regulation (EC) No. 1907/2006

Halogen Content

Solder Process Capability

Not Yet Reviewed for halogen content

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

7024NFIV


Agastat 7000, Time Delay Relays, Knob, 48VDC Time Delay Relay Input Voltage, Timing Range (Off-Time) 60 – 600 seconds




Compatible Parts



Also in the Series Agastat 7000

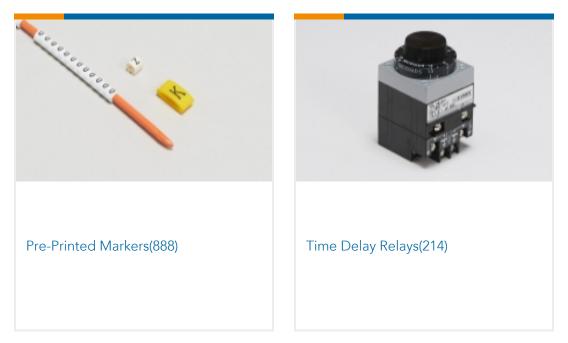

Customers Also Bought

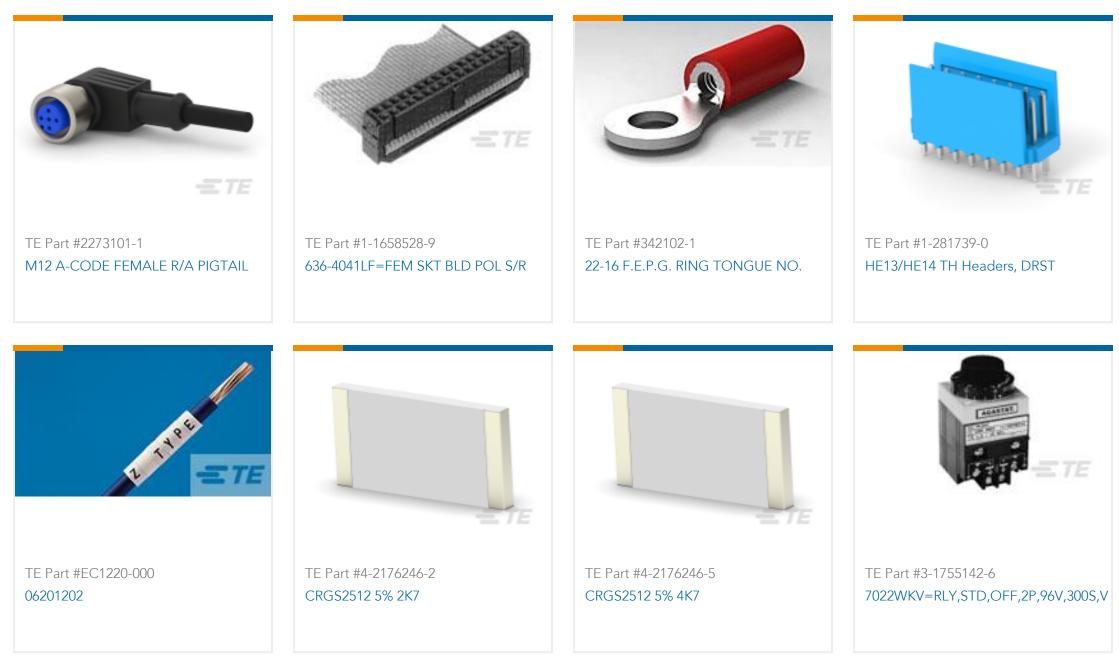

7024NFIV

Agastat 7000, Time Delay Relays, Knob, 48VDC Time Delay Relay Input Voltage, Timing Range (Off-Time) 60 – 600 seconds





Documents

Product Drawings 7024NFIV=RLY,STD,OFF,4P,48V,10M,I,V

English

Datasheets & Catalog Pages 5-1773450-5_sec12_7000

English