

RNF-100-1/16-4-SP

✓ ACTIVE

Raychem | Raychem RNF-100

TE Internal #: 5052914016

Raychem RNF-100, Heat Shrink Tubing, Yellow, Single Wall Type, 1.6 Expanded Inside Diameter (Min) .063 Expanded Inside Diameter (Min)

[View on TE.com >](#)



Heat Shrink Tubing > RNF-3000 Single Wall Stick Heat Shrink



Primary Product Color: **Yellow**

Wall Type: **Single**

Expanded Inside Diameter (Min): **1.6 mm [.063 in]**

Recovered Inside Diameter (Max): **.8 mm [.031 in]**

Shrink Ratio: **2:1**

[All RNF-3000 Single Wall Stick Heat Shrink \(180\)](#)

Features

Product Type Features

| | |
|----------------|---------|
| Product Family | RNF-100 |
| Wall Type | Single |

Electrical Characteristics

| | |
|---------------|-------|
| Voltage (Max) | .6 kV |
|---------------|-------|

Body Features

| | |
|--------------------------|---|
| Fluid Type | Gasoline, Hydraulic Fluid, Lubricating Oil, Water |
| Primary Product Color | Yellow |
| Shrink Ratio | 2:1 |
| Primary Product Material | Irradiated Modified Polyolefin |
| Flexibility | Flexible |

Dimensions

| | |
|--------------------------------------|-----------------------------|
| Recovered Wall Thickness (Tolerance) | .2 mm[.008 in] |
| Recovered Wall Thickness (Nominal) | .45 mm[.018 in] |
| Expanded Inside Diameter (Min) | 1.6 mm[.063 in] |
| Recovered Inside Diameter (Max) | .8 mm[.031 in] |
| Heat Shrink Tubing Size Range | .8 – 1.6 mm[.031 – .063 in] |



Usage Conditions

| | |
|---------------------------------|---|
| Fluid Resistance | Splash Protection |
| Shrink Temperature (Min) | 95 °C |
| Heat Shrink Tubing Flammability | Flame-Retardant |
| Operating Temperature Range | -55 – 135 °C |
| Heat Shrink Tubing Resistance | Abrasion, Fluids, Mechanical Damage, Strain |
| Recovery Temperature | 121 °C |

Product Availability

| | |
|-------------------|--------|
| Applicable Region | Global |
|-------------------|--------|

Packaging Features

| | |
|------------------|-----|
| Packaging Method | Box |
|------------------|-----|

Other

| | |
|-----------------------------------|----------------|
| Meets Low Outgassing Requirements | No |
| Product Source | Czech Republic |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)


| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Not applicable for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits

as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Also in the Series | Raychem RNF-100

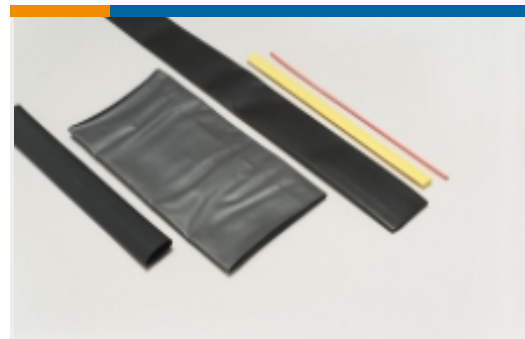

Heat Shrink Tubing(672)



Power Cable Tubing & Accessories(8)

Customers Also Bought



TE Part #2-1623927-3
CFR16 5% 1K0




TE Part #2023374003
ZHTM: Heat Shrink Tubing, 2:1 Shrink Ratio



TE Part #2208340-1
MQS, CONNECTOR HOUSING



TE Part #1563719-1
MCON, RECEPTACLE AND TAB

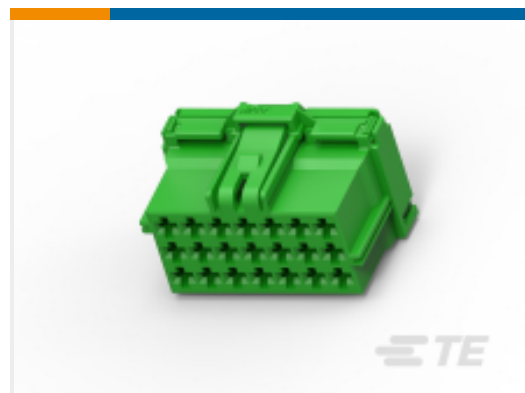


TE Part #2-1534180-1
AMP MCP, UNSEALED CONNECTOR HOUSING



TE Part #1-1534096-1
MQS ABDECKKAPPE2X6P




TE Part #1393433-2
V23540M5302Y 10=2P STIFTGEHAUS

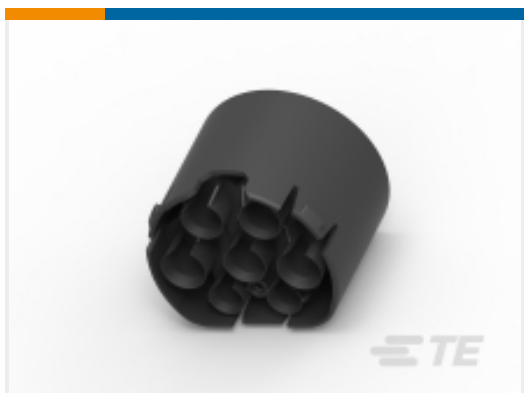

TE Part #2177787-1
2. LOCK,TE, IEC62196-2 TYPE 2,BK



TE Part #2177790-1
CABLE FIXATION,TE,COVER INLET

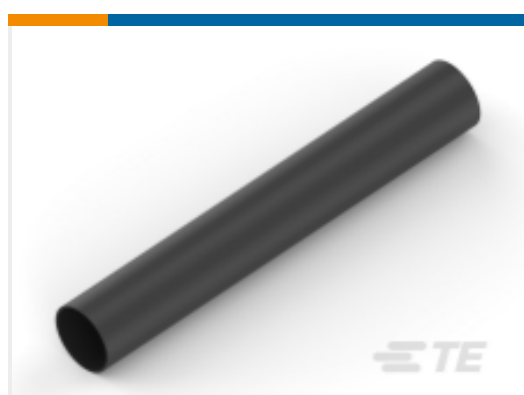

TE Part #NB11536001
ATUM-6/2-0-25MM

Documents

[Datasheets & Catalog Pages](#)

[RNF-100 Pages from 9-1773447-9](#)



English

[Application Tooling for Raychem Heat Shrink Product](#)

English

[Flexible, Flame-Retardant, High Performance, Polyolefin Heat-Shrinkable Tubing](#)

English

Product Specifications

[Quality Specification](#)

English

Product Environmental Compliance

[Safety Datasheet](#)

[Safety Datasheet](#)

German

[Safety Datasheet](#)

English

[Safety Datasheet](#)

English

[Safety Datasheet](#)

English

[Safety Datasheet](#)

English

[Safety Datasheet](#)

[Safety Datasheet](#)

[Safety Datasheet](#)

French

[Safety Datasheet](#)

[Safety Datasheet](#)

[Safety Datasheet](#)

[Safety Datasheet](#)