
# ZHD-SCE-6.4-50-9 - ACTIVE

# Raychem | ZHD-SCE TE Internal #: EC9880-000 Printable Tubing, Ladder Printable Tubing Type, Low Fire Hazard Printable Tubing Grade, 2:1 Printable Tubing Shrink Ratio, White, Markers per Sleeve 1

View on TE.com >



Identification & Labeling > Printable Tubing > ZHD-SCE LFH & FLUID RESISTANT SLEEVES

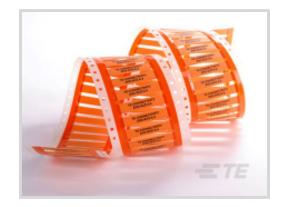

Printable Tubing Type: Ladder
Printable Tubing Grade: Low Fire Hazard
Printable Tubing Shrink Ratio: 2:1
Primary Product Color: White
Markers per Sleeve: 1

### All ZHD-SCE LFH & FLUID RESISTANT SLEEVES (88)

### Features

### Product Type Features

Printable Tubing Type

Ladder

Low Fire Hazard

### **Body Features**

Printable Tubing Shrink Ratio	2:1
Primary Product Color	White
Markers per Sleeve	1
Dimensions	
Product Length	50 mm[2 in]
Supplied Inner Diameter	6.4 mm[.25 in]
Recovered Inside Diameter	3.18 mm[.125 in]
Compatible Cable Diameter Range	3.81 – 5.46 mm[.15 – .215 in]
Usage Conditions	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Recommended Ribbon	See TE Document 411-121005 the Printer Product Ribbon Matrix

### ZHD-SCE-6.4-50-9

Printable Tubing, Ladder Printable Tubing Type, Low Fire Hazard Printable Tubing Grade, 2:1 Printable Tubing Shrink Ratio, White, Markers per Sleeve 1



## **Printer/Label Features** See TE Document 411-121005 the Printer **Recommended Printer** Product Ribbon Matrix Thermal Transfer Printer Technology **Packaging Features** Packaging Quantity 250 **Product Compliance** For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU Compliant Compliant EU ELV Directive 2000/53/EC No Restricted Materials Above Threshold China RoHS 2 Directive MIIT Order No 32, 2016 EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211)Does not contain REACH SVHC Halogen Content Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC

Free

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

### ZHD-SCE-6.4-50-9

Printable Tubing, Ladder Printable Tubing Type, Low Fire Hazard Printable Tubing Grade, 2:1 Printable Tubing Shrink Ratio, White, Markers per Sleeve 1








# Also in the Series **ZHD-SCE**





# Customers Also Bought

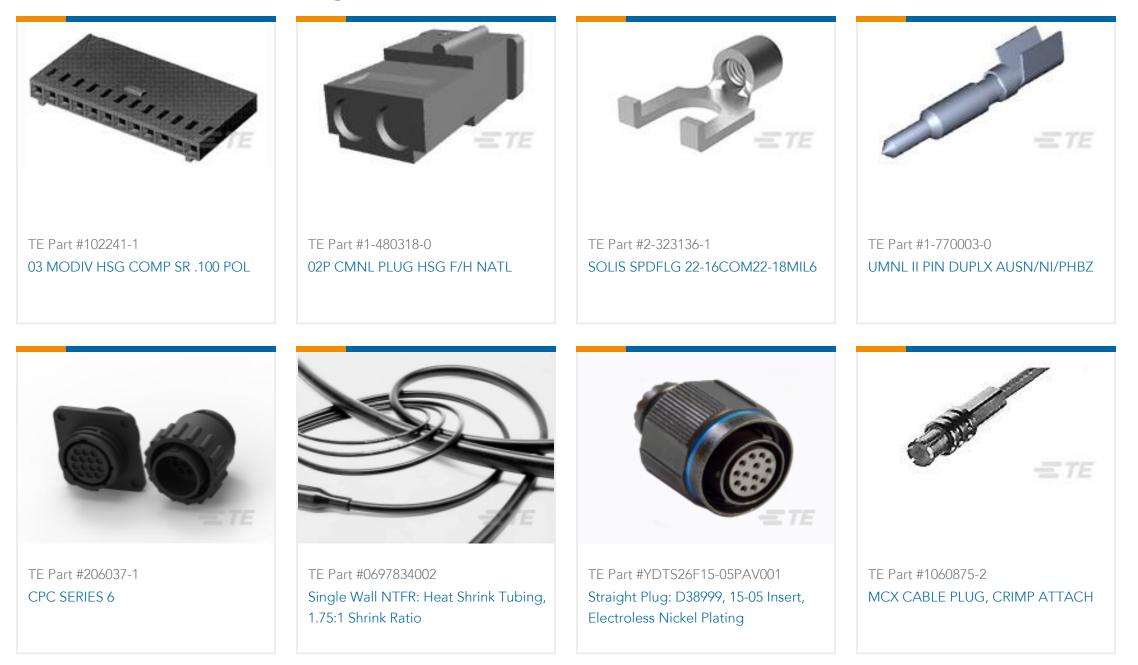

### ZHD-SCE-6.4-50-9

Printable Tubing, Ladder Printable Tubing Type, Low Fire Hazard Printable Tubing Grade, 2:1 Printable Tubing Shrink Ratio, White, Markers per Sleeve 1





### Documents

### Product Drawings ZHD-SCE-6.4-50-9

English

### Datasheets & Catalog Pages TTDS for ZHD-SCE, LOW FIRE HAZARD, DIESEL RESISTANT

English

Product Specifications Product Specification

English