ZHD-SCE-38.1-50-9 - ACTIVE

ZHD-SCE

TE Internal #: EC9890-000 ZHD-SCE, Printable Tubing, Ladder Printable Tubing Type, Fluid Resistant & Low Fire Hazard Printable Tubing Grade, 2:1 Printable Tubing Shrink Ratio

View on TE.com >



Identification & Labeling > Printable Tubing > ZHD-SCE LFH & FLUID RESISTANT SLEEVES



Printable Tubing Type: Ladder
Printable Tubing Grade: Fluid Resistant & Low Fire Hazard
Printable Tubing Shrink Ratio: 2:1
Primary Product Color: White

Markers per Sleeve: 1

All ZHD-SCE LFH & FLUID RESISTANT SLEEVES (88)

Features

Product Type Features

Printable Tubing Type

Ladder

Printable Tubing Grade

Fluid Resistant & Low Fire Hazard

Body Features

Printable Tubing Shrink Ratio	2:1
Primary Product Color	White
Markers per Sleeve	1
Dimensions	
Product Length	50 mm[2 in]
Supplied Inner Diameter	38.1 mm[1.5 in]
Recovered Inside Diameter	19 mm[.75 in]
Compatible Cable Diameter Range	20.9 – 33. mm[.825 – 1.3 in]
Usage Conditions	
Operating Temperature Range	-55 – 135 °C[-67 – 275 °F]
Operation/Application	
Recommended Ribbon	See TE Document 411-121005 the Printer Product Ribbon Matrix

ZHD-SCE-38.1-50-9

ZHD-SCE, Printable Tubing, Ladder Printable Tubing Type, Fluid Resistant & Low Fire Hazard Printable Tubing Grade, 2:1 Printable Tubing Shrink Ratio



Printer/Label Features Recommended Printer See TE Document 411-121005 the Printer Product Ribbon Matrix Thermal Transfer Printer Technology **Packaging Features** Packaging Quantity 250 **Product Compliance** For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU Compliant Compliant EU ELV Directive 2000/53/EC No Restricted Materials Above Threshold China RoHS 2 Directive MIIT Order No 32, 2016 EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211)Does not contain REACH SVHC Halogen Content Low Halogen - Br, Cl, F, I < 900 ppm per

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

ZHD-SCE-38.1-50-9

ZHD-SCE, Printable Tubing, Ladder Printable Tubing Type, Fluid Resistant & Low Fire Hazard Printable Tubing Grade, 2:1 Printable Tubing Shrink Ratio








Also in the Series **ZHD-SCE**





Customers Also Bought

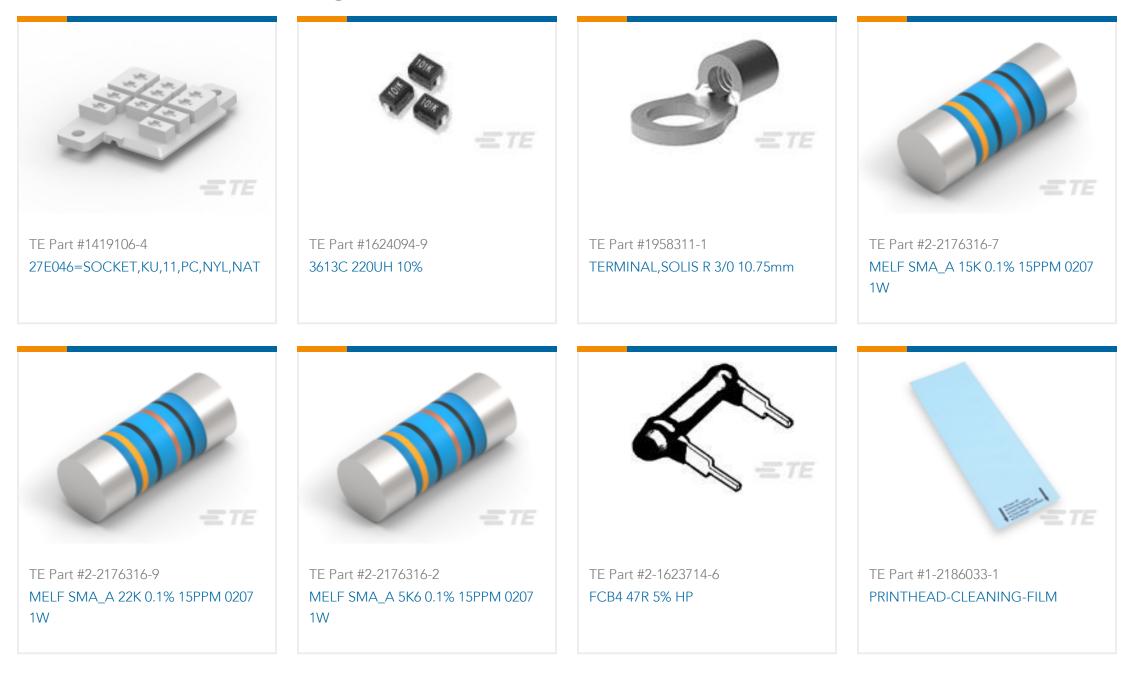

ZHD-SCE-38.1-50-9

ZHD-SCE, Printable Tubing, Ladder Printable Tubing Type, Fluid Resistant & Low Fire Hazard Printable Tubing Grade, 2:1 Printable Tubing Shrink Ratio





Documents

Product Drawings ZHD-SCE-38.1-50-9

English

Datasheets & Catalog Pages TTDS for ZHD-SCE, LOW FIRE HAZARD, DIESEL RESISTANT

English

Product Specifications Product Specification

English