



G06-12-130-3 Semi-Traction Bloc Battery







Features

Negative

Maintenance-free bloc batteries in Gel technology (no topping up during lifetime)

Good high current performance for extreme operating conditions

High-class patented safety valve

700 cycles (DIN EN 60254-1) (IEC 254-1)

Valve-regulated lead-acid battery

Recyclable

Long cycle life

Low self discharge rate allows for up to 2 years shelf life

Classified as a non-spillable battery is not restricted for transportation by:

- Air (IATA/ICAO provision 67)
- Ground (STB, DOT-CFR-HMR49)
- Water (IMDG amendment 27)

Applications

Electric vehicles

Wheelchairs

Cleaning machines

Electric working platforms

Universal for multiple cyclic applications

Electrical Specifications

Voltage	12V
80% DOD Voltage Cutoff	11.2V
SelfDischarge	Less than 3% per month (20°C/68°F)
Charge Temperature	Min: -10°C (14°F) / Max: 50°C (122°F)
Discharge Temperature**	Min: -40°C (-40°F) / Max: 50°C (122°F)
Storage	Min: -20°C (-4°F) / Max: 60°C (140°F)

Amp Hours (AH)				
20 HR	10 HR	5HR	3 HR	
150	146	130	123	

** CAUTION: Depths of discharge, operating voltages and currents, when designing systems for use at maximum temperatures, will vary.

Mechanical Specifications

Industry Reference	DINB		
Length (A)	20.2 in	513 mm	
Width (B)	8.9 in	223 mm	
Height (C)	8.5 in	217 mm	
Weight	119 lb	54 kg	
Terminal (Opt'l)*	A-Pole (Industrial Terminal optional)		
Cell(s)	6		
Electrolyte	Gel		
Terminal Torque Nm	n/a		

NOTE: There is a tolerance of +/-2%.




Charging profile


IU Charging	$I = min. 12\% C_5 max. 18\% C_5$ U = 2.4 V per cell
IUI Charging	$I_1 = \min. 12\% C_5 \max. 18\% C_5$

U = 2.35 V per cell l_2 = 1.5 % C₅ for max. 4 hours


Self discharge at different temperatures



Capacity vs. temperature

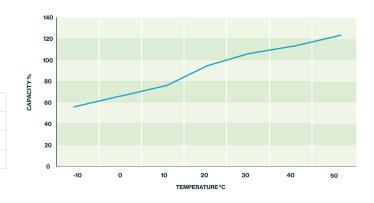

Storage: Determine the state of charge



Relation between charging, voltage and temperature

