


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0643221019**
Status: **Active**
Overview: CMC and CMX Sealed, Hybrid, Modular Connectors
Description: 0.635mm CMC CP Female Terminal, Tin Plated, for Square 0.6mm x 0.6mm Pins, Wire Size 0.35mm²

Documents:

3D Model	Application Specification AS-64322-001-001 (PDF)
3D Model (PDF)	Application Specification AS-64322-001-CH-001 (PDF)
Drawing (PDF)	Application Specification AS-64322-001-FR-001 (PDF)
Product Specification PS-64319-002-001 (PDF)	Application Specification AS-98420-001-001 (PDF)
Product Specification PS-64326-001-001 (PDF)	Application Specification AS-98420-001-CH-001 (PDF)
Application Specification AS-64318-002-001 (PDF)	Application Specification AS-98420-001-FR-001 (PDF)
Application Specification AS-64318-002-CH-001 (PDF)	Application Specification AS-98420-001-SP-001 (PDF)
Application Specification AS-64318-002-FR-001 (PDF)	Application Specification AS-98420-002-001 (PDF)
Application Specification AS-64318-002-SP-001 (PDF)	Application Specification AS-98420-002-CH-001 (PDF)
Application Specification AS-64319-002-001 (PDF)	Application Specification AS-98420-002-FR-001 (PDF)
Application Specification AS-64319-002-CH-001 (PDF)	Application Specification AS-98420-002-SP-001 (PDF)
Application Specification AS-64319-002-FR-001 (PDF)	Packaging Specification PK-98913-001-001 (PDF)
Application Specification AS-64319-002-SP-001 (PDF)	RoHS Certificate of Compliance (PDF)

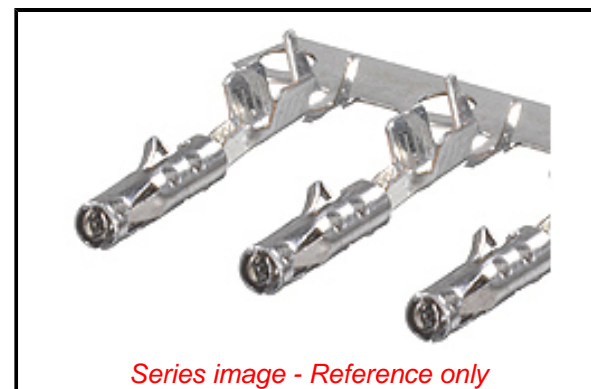

Series image - Reference only

**EU ELV
Compliant**

**EU RoHS
Compliant
REACH SVHC**

Not Contained Per -
D(2020)9139-DC (19
Jan 2021)

**Halogen-Free
Status**

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Compliant

Not Contained

General

Product Family	Crimp Terminals
Series	64322
Application	Automotive, Signal, Wire-to-Board
Comments	* Current tested on a 5 terminals loaded connector, current for temperature increase of 40°C. Current max = 6A for 0.635mm Terminal(0.75mm ² wire)
Crimp Quality Equipment	Yes
Overview	CMC and CMX Sealed, Hybrid, Modular Connectors
Product Name	CMC, CP Terminal
UPC	883906129460

Physical

Gender	Female
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.160/g
Packaging Type	Reel
Plating min - Mating	1.524µm, 3.048µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.25mm-1.40mm
Wire Size AWG	22, 24
Wire Size mm ²	0.35

Search Parts in this Series

64322 Series

Use With

CMC Connector [64318](#) , [64319](#) , [64320](#) , [64321](#) , [64326](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
PremiumGrade Hand Crimp Tool for CP 0.635mm Female Terminals for CMC Connector, 0.22-0.35mm ² Wire	638119100
Extraction Tool for 0.60mm CP Crimp Terminals for CMC Connector	638132400

Electrical

Current - Maximum per Contact 6.0A
Voltage - Maximum 14V DC

Solder Process Data

Lead-free Process Capability N/A

Material Info**Reference - Drawing Numbers**

Application Specification AS-64318-002-001, AS-64318-002-CH-001,
AS-64318-002-FR-001, AS-64318-002-SP-001,
AS-64319-002-001, AS-64319-002-CH-001,
AS-64319-002-FR-001, AS-64319-002-SP-001,
AS-64322-001-001, AS-64322-001-CH-001,
AS-64322-001-FR-001, AS-98420-001-001,
AS-98420-001-CH-001, AS-98420-001-FR-001,
AS-98420-001-SP-001, AS-98420-002-001,
AS-98420-002-CH-001, AS-98420-002-FR-001,
AS-98420-002-SP-001
Crimp Specification CS-64322-001-001
Packaging Specification PK-98913-001-001
Product Specification PS-64319-002-001, PS-64326-001-001
Sales Drawing SD-64322-001-000

FineAdjust Applicator 639021900
for 0.60mm CP
Terminals, for
0.22mm², 0.35mm²,
0.50mm² Metric
Wires

This document was generated on 08/24/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION