

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0643231029**
Status: **Active**
Overview: CMC and CMX Sealed, Hybrid, Modular Connectors
Description: 1.50mm CMC CP Female Terminal, Tin Plated, for Tab Ddimensions 1.50mm x 0.80mm, Wire Size 0.50mm² - 1.0mm²

Documents:


3D Model	Application Specification AS-64323-001-CH-001 (PDF)
Drawing (PDF)	Application Specification AS-64323-001-FR-001 (PDF)
3D Model (PDF)	Application Specification AS-98420-001-001 (PDF)
Product Specification PS-64319-002-001 (PDF)	Application Specification AS-98420-001-CH-001 (PDF)
Application Specification AS-64318-002-001 (PDF)	Application Specification AS-98420-001-FR-001 (PDF)
Application Specification AS-64318-002-CH-001 (PDF)	Application Specification AS-98420-001-SP-001 (PDF)
Application Specification AS-64318-002-FR-001 (PDF)	Application Specification AS-98420-002-001 (PDF)
Application Specification AS-64318-002-SP-001 (PDF)	Application Specification AS-98420-002-CH-001 (PDF)
Application Specification AS-64319-002-001 (PDF)	Application Specification AS-98420-002-FR-001 (PDF)
Application Specification AS-64319-002-CH-001 (PDF)	Application Specification AS-98420-002-SP-001 (PDF)
Application Specification AS-64319-002-FR-001 (PDF)	Packaging Specification PK-98915-001-001 (PDF)
Application Specification AS-64319-002-SP-001 (PDF)	RoHS Certificate of Compliance (PDF)
Application Specification AS-64323-001-001 (PDF)	

General

Product Family	Crimp Terminals
Series	64323
Application	Automotive, Power, Wire-to-Wire
Comments	* Current tested on a fully loaded connector, current for temperature increase of 40°C. Current max = 12A for 1.50mm Terminal (2.00mm ² wire)*
Crimp Quality Equipment	Yes
Overview	CMC and CMX Sealed, Hybrid, Modular Connectors
Product Name	CMC, CP Terminal
UPC	883906129583

Physical

Gender	Female
Material - Metal	High Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.340/g
Packaging Type	Reel
Plating min - Mating	1.524µm, 3.048µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.40mm-2.15mm
Wire Size AWG	18, 20
Wire Size mm ²	0.50-1.00

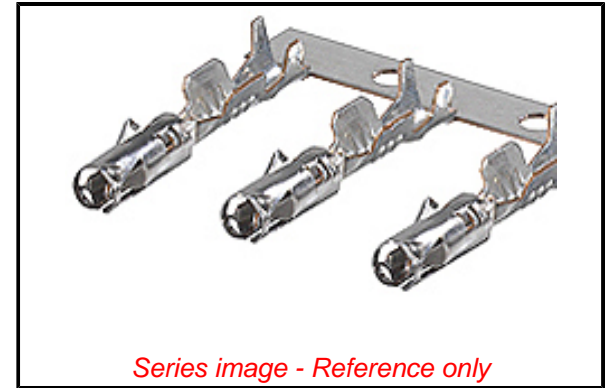

Series image - Reference only

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)9139-DC (19
Jan 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Compliant

Not Contained

Search Parts in this Series

64323 Series

Use With

CMC Connector [64318](#) , [64319](#) , [64320](#) , [64321](#) , [64326](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

PremiumGrade [638118900](#)

Hand Crimp Tool
for CP 1.50mm
Female Terminals
for CMC Connector,
1.00-0.50mm² Wire
Extraction Tool for
1.50mm CP Crimp
Terminals for CMC
Connector

[638132300](#)

Electrical

Current - Maximum per Contact 12.0A
Voltage - Maximum 14V DC

Solder Process Data

Lead-free Process Capability N/A

Material Info**Reference - Drawing Numbers**

Application Specification AS-64318-002-001, AS-64318-002-CH-001,
AS-64318-002-FR-001, AS-64318-002-SP-001,
AS-64319-002-001, AS-64319-002-CH-001,
AS-64319-002-FR-001, AS-64319-002-SP-001,
AS-64323-001-001, AS-64323-001-CH-001,
AS-64323-001-FR-001, AS-98420-001-001,
AS-98420-001-CH-001, AS-98420-001-FR-001,
AS-98420-001-SP-001, AS-98420-002-001,
AS-98420-002-CH-001, AS-98420-002-FR-001,
AS-98420-002-SP-001
Crimp Specification CS-64323-001-001
Packaging Specification PK-98915-001-001
Product Specification PS-64319-002-001
Sales Drawing SD-64323-001-000

This document was generated on 08/24/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION