

VOLTCRAFT - RELIABLE AND PRECISE. SINCE 1982.

For more than 40 years, our product range has been dynamically adapting to the constant changes in the industry. We commit to offering first-class quality to our customers while delivering an excellent cost-performance ratio. This philosophy remains the cornerstone of Voltcraft's success.

CE

LITHIUM-BATTERY CR2025

Item No.:	Pcs per pack	
2542838	1	
2525876	4	
2525769	5	
3221600	10	
3373185	100	

TECHNICAL DATA


Type:	CR2025	
Classification:	Non-rechargeable	
Chemical system:	Lithium/Manganese Dioxide (Li/MnO ₂)	
Nominal voltage:	3.0 V	
Weight (approx.)	2.4 g	
Capacity:	Item No.: 2542838 140 mAh Item No.: 2525876 160 mAh Item No.: 2525769 160 mAh Item No.: 3221600 160 mAh Item No.: 3373185 160 mAh	
Loading:	15 kΩ (20 ± 2 °C, 55 ± 20 % RH)	
Cut-off voltage:	2.0 V	
Operating conditions:	-18 to +50 °C +10 to +35 °C (recommended)	
Storage conditions:	0 to +30 °C, 55 ± 20 % RH	
Heavy metals:	Hg ≤5 ppm, Cd ≤ 20 ppm, Pb ≤ 40 ppm	

For performance and safety, observe the operating / storage conditions. Capacity varies depending on the applied load, temperature, and cut-off voltage.




PERFORMANCE CHARACTERISTICS

DISCHARGE

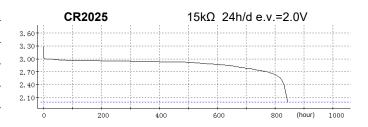

DIMENSIONS (mm)

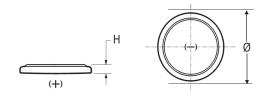

Dimension	Min.	Max.
Ø	19.7	20.0
Н	2.2	2.5

This is a publication by Conrad Electronic SE, Klaus-Conrad-Str. 1, D-92240 Hirschau (www.conrad.com). All rights including translation reserved. Reproduction by any method, e.g. photocopy, microfilming, or the capture in electronic data processing systems require the prior written approval by the editor. Reprinting, also in part, is prohibited. This publication represents the technical status at the time of printing.

Copyright 2025 by Conrad Electronic SE.*25257692525876254283832216003373185_v2_0725_02_ds_en