

VOLTCRAFT - RELIABLE AND PRECISE. SINCE 1982.

For more than 40 years, our product range has been dynamically adapting to the constant changes in the industry. We commit to offering first-class quality to our customers while delivering an excellent cost-performance ratio. This philosophy remains the cornerstone of Voltcraft's success.

 ϵ

LITHIUM-BATTERY CR1620, 3.0 V/70 mAh

Item No.:	Pcs per pack	
2542842	1	
3221592	5	
3221591	10	

TECHNICAL DATA


Type:	CR1620	
Classification:	Non-rechargeable	
Chemical system:	Lithium/Manganese Dioxide (Li/MnO ₂)	
Nominal voltage:	3.0 V	
Weight (approx.)	1.25 g	
Capacity:	70 mAh	
Loading:	47 kΩ (20 ± 2 °C, 55 ± 20 % RH)	
Cut-off voltage:	2.0 V	
Operating conditions:	-18 to +50 °C +10 to +35 °C (recommended)	
Storage conditions:	0 to +30 °C, 55 ± 20 % RH	
Heavy metals:	Hg ≤5 ppm, Cd ≤ 20 ppm, Pb ≤ 40 ppm	

For performance and safety, observe the operating / storage conditions. Capacity varies depending on the applied load, temperature, and cut-off voltage.




PERFORMANCE CHARACTERISTICS

DISCHARGE

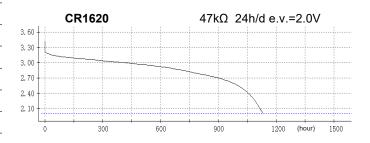

DIMENSIONS (mm)



Dimension	Min.	Max.
Ø	15.7	16.0
Н	1.8	2.0

This is a publication by Conrad Electronic SE, Klaus-Conrad-Str. 1, D-92240 Hirschau (www.conrad.com). All rights including translation reserved. Reproduction by any method, e.g. photocopy, microfilming, or the capture in electronic data processing systems require the prior written approval by the editor. Reprinting, also in part, is prohibited. This publication represents the technical status at the time of printing.

Copyright 2025 by Conrad Electronic SE. *2542842_3221591_3221592_v1_0425_02_ds_en_(2)