
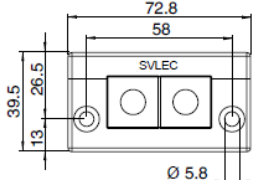
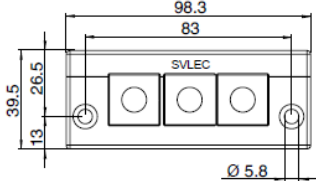
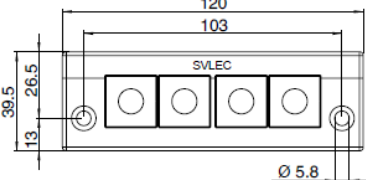


Data Sheet

< Cable Entry: Frame >

KEL-E

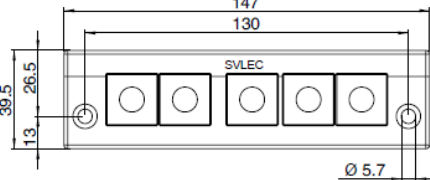

Item No. / Model No.	Description	Platemouting dimensions (mm)	KT Inserts small / large
2582297 / KEL-E2		43 × 24	2 / -
2582298 / KEL-E3		65 × 24	3 / -
2582299 / KEL-E4		86 × 24	4 / -
2582300 / KEL-E5		112 × 24	5 / -

Material : Polyamide (PA)

Flame class : UL94-V0, Self-extinguishing

Protection degree : IP54, With gasket and correct selection of the cable inserts (Compatible with DIN EN 60529:2000-09)

Temperature : - 40°C to + 140°C (Static)

Properties : Halogen-free, silicone-free

KEL Height : 17 mm

Data Sheet

KEL 6/4



KEL 10/6



Item No. / Model No.	Description	Platemounting dimensions (mm)
2582293 / KEL 6/4		
2582294 / KEL 10/6		

Material : Polyamide (PA)

Flame class : UL94-V0, Self-extinguishing

Protection degree : IP54, With gasket and correct selection of the cable inserts (Compatible with DIN EN 60529:2000-09) Temperature : - 40°C to + 140°C (Static)

Properties : Halogen-free, silicone-free

Cut-out dimensions: 46 x 46 mm (KEL 6/4), 36 x 65 mm (KEL 10/6)





KEL Height : 17 mm

Data Sheet

KEL 16/8

KEL 24/10

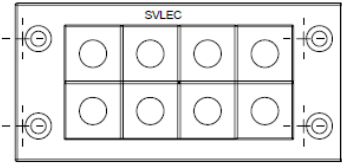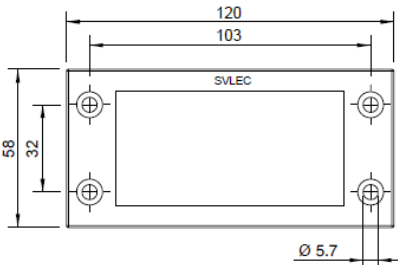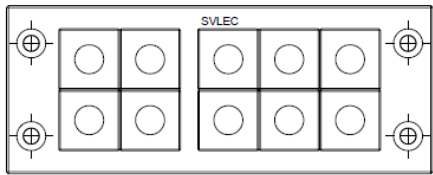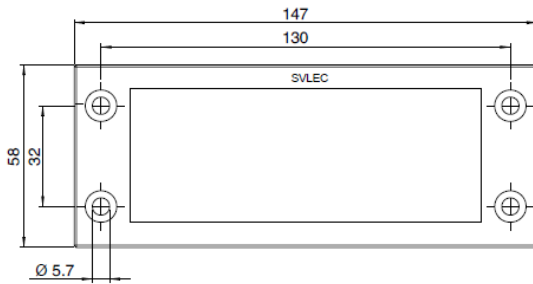

Item No. / Model No.	Description	Platemouting dimensions (mm)
2582295 / KEL 16/8		
2582296 / KEL 24/10		

Material : Polyamide (PA)

Flame class : UL94-V0, Self-extinguishing

Protection degree : IP54, With gasket and correct selection of the cable inserts (Compatible with DIN EN 60529:2000-09) Temperature : - 40°C to + 140°C (Static)

Properties : Halogen-free, silicone-free

Cut-out dimensions: 36 x 86 mm (KEL 16/8), 36 x 112 mm (KEL 24/10)

KEL Height : 17 mm