ATUM-24/6-0-SP <

RAYCHEM | RAYCHEM ATUM

TE Internal #: NB10114001 Heat Shrink Tubing, Black, Dual Wall, .945 in [24 mm] Expanded Inside, .236 in [6 mm] Recovered Inside, 4:1 Shrink Ratio, RAYCHEM ATUM

View on TE.com >

Heat Shrink Tubing



Primary Product Color: Black

Wall Type: Dual

Expanded Inside Diameter (Min): 24 mm [.945 in]

Recovered Inside Diameter (Max): 6 mm [.236 in]

Shrink Ratio: 4:1

Features



Product Type Features

Product Family	ATUM
Wall Type	Dual
Electrical Characteristics	
Voltage (Max)	.6 kV
Body Features	
Fluid Type	Aviation Fuel, Chemicals/Solvents, De-Icing Fluid, Diesel Fuel, Hydraulic Fluid, Lubricating Oil
Primary Product Color	Black
Shrink Ratio	4:1
Primary Product Material	Irradiated Modified Polyolefin
Flexibility	Semi-Flexible
Dimensions	
Recovered Wall Thickness (Tolerance)	.55 mm[.022 in]

ATUM-24/6-0-SP

Heat Shrink Tubing, Black, Dual Wall, .945 in [24 mm] Expanded Inside, .236 in [6 mm] Recovered Inside, 4:1 Shrink Ratio, RAYCHEM ATUM



Expanded Inside Diameter (Min)

Recovered Inside Diameter (Max)

Heat Shrink Tubing Size Range

Usage Conditions

Shrink Temperature (Min)

Fluid Resistance

Heat Shrink Tubing Flammability

Operating Temperature Range

Heat Shrink Tubing Resistance

Recovery Temperature

Product Availability

Applicable Region

Packaging Features

Packaging Method

Other

Moote Low Outassing Requirements

2.25 mm[.089 in]

24 mm[.945 in]

6 mm[.236 in]

6 – 24 mm[.236 – .945 in]

80 °C

Moisture, Splash Protection, Spray Protection

Flame-Retardant

-55 – 110 °C

Fluids, Mechanical Damage, Strain Relief

110 °C

Global

Reel

No

Meets Low Outgassing Requirements	INO

Product Source

Czech Republic

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: DBMC (1.16% in Component Part) Aticle Safe Usage Statements: Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.

ATUM-24/6-0-SP

Heat Shrink Tubing, Black, Dual Wall, .945 in [24 mm] Expanded Inside, .236 in [6 mm] Recovered Inside, 4:1 Shrink Ratio, RAYCHEM ATUM



Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Also in the Series **RAYCHEM ATUM**




Customers Also Bought



ATUM-24/6-0-SP

Heat Shrink Tubing, Black, Dual Wall, .945 in [24 mm] Expanded Inside, .236 in [6 mm] Recovered Inside, 4:1 Shrink Ratio, RAYCHEM ATUM



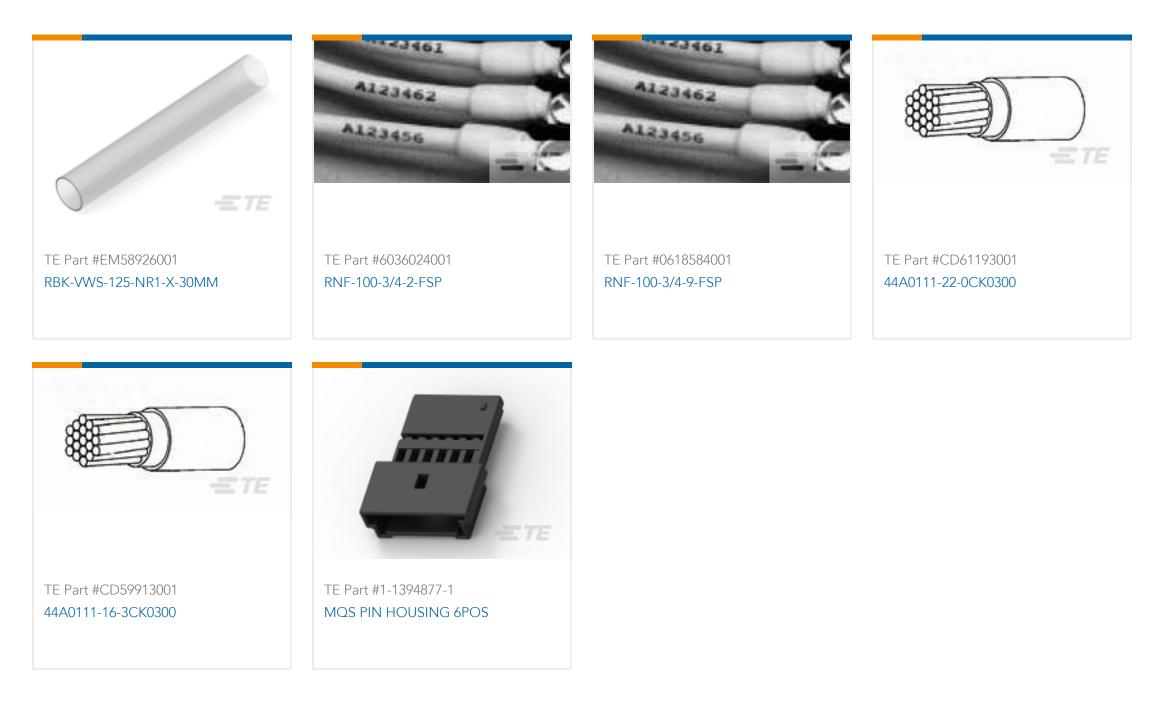

Documents

Product Drawings ATUM-24/6-0-SP

English

Datasheets & Catalog Pages ATUM Pages from 9-1773447-9

English

Product Specifications **Quality Specification**

English