
2-1393219-2 - ACTIVE

### SCHRACK

TE Internal #: 2-1393219-2 Power Relays, Standard, Monostable, DC, 211 mW Coil Power Rating DC, 2725 Ω Coil Resistance, 24 VDC Coil Voltage, 1 Form C (CO)

#### View on TE.com >

Relays, Contactors & Switches > Relays > Power Relays

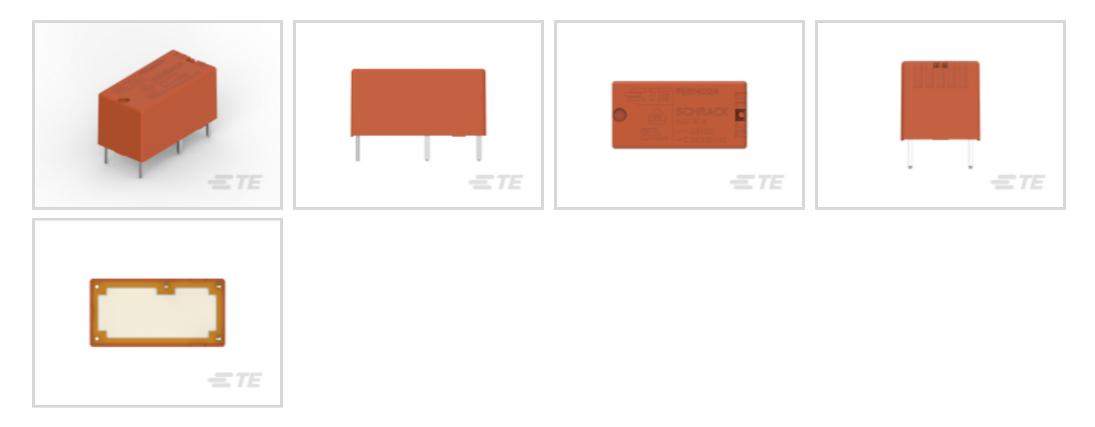

Power Relay Type: Standard

Coil Magnetic System: Monostable, DC

Coil Power Rating Class: 200 – 300 mW

Coil Power Rating DC: 211 mW

Coil Resistance: 2725  $\Omega$ 

### Features



### Product Type Features

| Power Relay Type                | Standard       |  |  |  |  |  |
|---------------------------------|----------------|--|--|--|--|--|
| Electrical Characteristics      |                |  |  |  |  |  |
| Coil Magnetic System            | Monostable, DC |  |  |  |  |  |
| Coil Power Rating Class         | 200 – 300 mW   |  |  |  |  |  |
| Coil Power Rating DC            | 211 mW         |  |  |  |  |  |
| Coil Resistance                 | 2725 Ω         |  |  |  |  |  |
| Coil Voltage Rating             | 24 VDC         |  |  |  |  |  |
| Contact Switching Voltage (Max) | 400 VAC        |  |  |  |  |  |
| Contact Voltage Rating          | 250 VAC        |  |  |  |  |  |
| Contact Features                |                |  |  |  |  |  |
| Contact Arrangement             | 1 Form C (CO)  |  |  |  |  |  |
| Contact Current Class           | 5 – 10 A, 16 A |  |  |  |  |  |
| Contact Current Rating (Max)    | 5 A            |  |  |  |  |  |
| Contact Material                | AgNi90/10      |  |  |  |  |  |

### 2-1393219-2

Power Relays, Standard, Monostable, DC, 211 mW Coil Power Rating DC, 2725  $\Omega$  Coil Resistance, 24 VDC Coil Voltage, 1 Form C (CO)



| Contact Number of Poles                       | 1  |
|---|--|
| Relay Terminal Type                           | PCB-THT  |
| Mechanical Attachment                         |  |
| Relay Mounting Type                           | Printed Circuit Board  |
| Packaging Features                            |  |
| Packaging Method                              | Box & Tube, Carton   |
| EU RoHS Directive 2011/65/EU                  |  |
| EU RoHS Directive 2011/65/EU                  |  |
| EU ELV Directive 2000/53/EC                   | Compliant  |
|   | Compliant<br>Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 |  |
|   | Compliant  |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Compliant<br>No Restricted Materials Above Threshold<br>Current ECHA Candidate List: JUNE 2022<br>(224)<br>Candidate List Declared Against: JUNE<br>2022 (224) |

Wave solder capable to 260°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

### 2-1393219-2

Power Relays, Standard, Monostable, DC, 211 mW Coil Power Rating DC, 2725  $\Omega$  Coil Resistance, 24 VDC Coil Voltage, 1 Form C (CO)





# Customers Also Bought



| RY611024  | RTD14024        | 3POS,DIA 4MM,PIN HSG ASSY,COD A | 4POS,HVA,2PHM,PASS THRU,HYB<br>ASSY |  |
|---|-----------------|---------------------------------|-------------------------------------|--|
|   |                 |                                 |                                     |  |
|   |                 |                                 |                                     |  |
|   |                 |                                 |                                     |  |
| TE Part #2-2282265-6<br>5POS,HVA,630,PIGTAIL,HYB ASSY |                 |                                 |                                     |  |
| Documents   |                 |                                 |                                     |  |
| Documents   |                 |                                 |                                     |  |
| CAD Files<br>Customer View Model                      |                 |                                 |                                     |  |
| ENG_CVM_CVM_2-1393219-                                | z_uz.3a_igs.zip |                                 |                                     |  |

English

Customer View Model

ENG\_CVM\_CVM\_2-1393219-2\_C2.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_CVM\_2-1393219-2\_C2.2d\_dxf.zip

### 2-1393219-2

Power Relays, Standard, Monostable, DC, 211 mW Coil Power Rating DC, 2725  $\Omega$  Coil Resistance, 24 VDC Coil Voltage, 1 Form C (CO)



| English   |  |  |
|---|--|--|
| 3D PDF  |  |  |
| 3D  |  |  |
| By downloading the CAD file I accept and agree to the <b>Terms and Conditions</b> of use. |  |  |
| Datasheets & Catalog Pages  |  |  |
| Lighting Relays Guide   |  |  |
| English   |  |  |
| Miniature PCB Relay PE  |  |  |
| English   |  |  |
| Product Environmental Compliance  |  |  |
| TE Material Declaration   |  |  |
| English   |  |  |
| Agency Approvals  |  |  |
| VDE Certificate   |  |  |
| English   |  |  |