

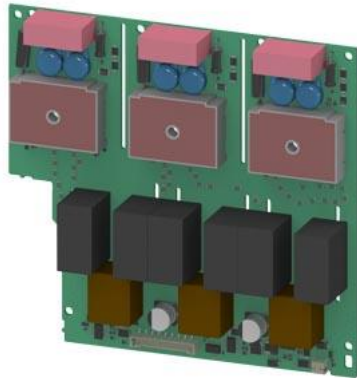


Figure similar

PCB 600 V for 3RW55, Size 1, 13 A

product designation		Printed circuit board	
design of the product		600 V, 13 A	
manufacturer's article number			
• of soft starter		3RW5513-HA.5	
Substance Prohibittance (Date)		02/15/2018	
Ambient conditions			
ambient temperature during storage		-40 ... +80 °C	
Certificates/ approvals			
General Product Approval		For use in hazard- ous locations	Declaration of Conformity
			Test Certificates

[Confirmation](#)



[Explosion Protection
Certificate](#)



[Type Test Certificates/Test Report](#)

Marine / Shipping

other



[Confirmation](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5951-0PA05>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5951-0PA05>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5951-0PA05>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5951-0PA05&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5951-0PA05/char>

Characteristic: Installation altitude

last modified:

1/18/2021 

