






NEOZED fuse-link, D01, 13 A, gG, Un AC: 400 V, Un DC: 250 V, with tin-coated contact-caps

Model					
product brand name	SENTRON				
product designation	NEOZED fuse link				
design of the product	With tin-coated contact caps				
product variations	Pack of 10				
design of the fuse link	NEOZED fuse link				
General technical data					
size of fuse system according to EN 60269-1	D01				
operating class of the fuse link	gG				
Supply voltage					
supply voltage					
• at AC rated value	400 V				
• at DC	250 V				
operating voltage rated value	400 V				
protection class IP	IP20, with connected conductors				
switching capacity current according to IEC 60947-2 rated value	50 kA				
Dissipation					
power loss [W] for rated value of the current at AC in hot operating state per pole	1.5 W				
Main circuit					
operational current rated value	13 A				
Appearance					
color coding of the fuse link	Black				
maximum short-circuit current breaking capacity (I _{cu}) at AC rated value	50 kA				
Mechanical Design					
mounting position	Any, preferably vertical				
net weight	7 g				
ambient temperature during operation					
• minimum	-25 °C				
• maximum	40 °C				
environmental category	Up to 45°C at 95 % rel. humidity				
General Product Approval					
<table border="1"> <thead> <tr> <th>Test Certificates</th> <th>other</th> </tr> </thead> <tbody> <tr> <td> Confirmation  Miscellaneous </td> <td> Type Test Certificates/Test Report Special Test Certificate Miscellaneous </td> </tr> </tbody> </table>		Test Certificates	other	Confirmation  Miscellaneous	Type Test Certificates/Test Report Special Test Certificate Miscellaneous
Test Certificates	other				
Confirmation  Miscellaneous	Type Test Certificates/Test Report Special Test Certificate Miscellaneous				
other	Environment				

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SE2013-2A>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SE2013-2A>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE2013-2A

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

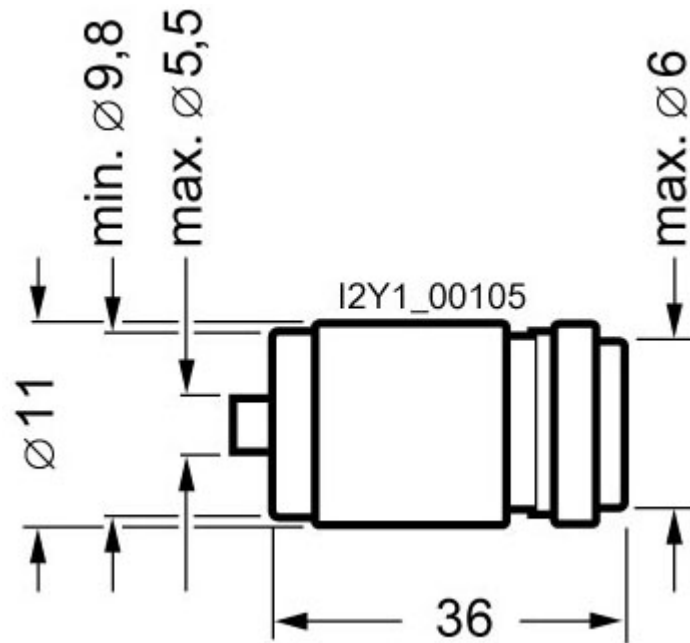

last modified:

1/27/2023

