



Part Number : [2016061610](#)


Product Description : High Current Universal Clamp Terminal Block, 35.00mm DIN-rail or Screw Mount, 150.0A / 1000V, Grey Housing and Cover, 1 Circuit

Series Number : 201606

Status : Active

Product Category : Terminal Blocks and Barrier Strip

Engineering Number : MX-KE161

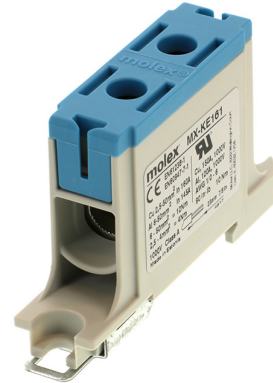

---

## Documents & Resources

### Drawings

[Drawing 2016061610\\_sd.pdf](#)

### 3D Models and Design Files

[3D Model 2016061610\\_stp.zip](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

### [Multiple Part Product Compliance Statements](#)

- Eu RoHS
- REACH SVHC
- Low-Halogen

### [Multiple Part Industry Compliance Documents](#)

- IPC 1752A Class C
- IPC 1752A Class D

- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

---

## Part Details

### General

Status	Active
Category	Terminal Blocks and Barrier Strip
Series	201606
Description	High Current Universal Clamp Terminal Block, 35.00mm DIN-rail or Screw Mount, 150.0A / 1000V, Grey Housing and Cover, 1 Circuit
Application	Wire-to-Wire
Component Type	One Piece
Product Family	High-Current, Universal-Clamp Terminal Blocks
Product Name	Universal Clamp
Type	Universal Clamp
UPC	78172551159

### Agency

UL	E48521
----	--------

### Electrical

Current - Maximum per Contact	150.0A
Voltage - Maximum	1000V

### Physical

Circuits (Loaded)	1
Circuits (maximum)	1
Color - Resin	Gray
Entry Angle	Horizontal
Lock to Mating Part	None
Material - Metal	Aluminum

Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyamide
Net Weight	45.300/g
Number of Rows	1
Orientation	Vertical
Panel Mount	Screws
Pitch - Mating Interface	N/A
Polarized to Mating Part	N/A
Stackable	No
Temperature Range - Operating	-40° to +125°C
Termination Interface Style	Screw
Wire Size (AWG)	1/0-6, 6+6, 8+8+8
Wire Size mm <sup>2</sup>	13.00+13.00, 13.00-53.00, 8.30+8.30+8.30