

Lightweight and easy to use, these torches offer ideal manoeuvrability for smooth welding. The Ergonomic handle design provides optimal grip to achieve the perfect weld. The SR 26 torch is the most powerful in the air-cooled range.

## FEATURES

### SR 26 BASIC

**Cooling:** Air  
**Capacity:**

- in direct current (DC): 240 A
- in alternating current (AC): 200 A

**Duty cycle:** 60% Duty cycle

**Tungsten electrode:** Ø 0.5 - 4.0 mm



### SR 26 GRIP

**Cooling:** Air  
**Capacity:**

- in direct current (DC): 180 A
- in alternating current (AC): 130 A


**Duty cycle:** 35% Duty cycle

**Tungsten electrode:** Ø 0.5 - 4.0 mm



## CONFIGURATIONS

Connector	L	DB	P	l (m)	Ref		
					GRIP	GRIP	GRIP
Ø 35/50	DIN	—	GRIP	4m	044463	046054	046115
				8m	044371	046078	046122
Ø 35/50	AMPHENOL	—	—	4m	—	038271	—
				8m	046184	046177	047877

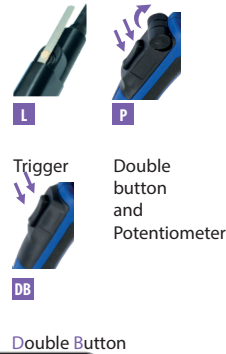

## INCLUDED

All the essential consumables for your TIG AC/DC SR26 torch in a box:

- 2 Gas nozzles (N5 and N7)
- 2 collets body (Ø1.6 + Ø2/2.4)
- 2 collet (Ø1.6 + Ø2.4)
- 2 caps (1 short + 1 long)
- 2 tungsten electrodes WR2 AC/DC (Ø1.6 + Ø2.4)

• Also available for sale without the torch (ref. 044678)

## CONSUMABLES

STANDARD ASSEMBLY

Nozzle		Collet body		Standard insulating ring		Collet		Head cover	
N 4 - Ø 6.5	(x3) 038394	Ø 1.6	(x3) 044968	(x1) 045040	Ø 1.6	(x3) 044982	Courte	(x1) 044944	
N 5 - Ø 8.0	(x3) 045026	Ø 2.0/2.4	(x3) 044975		Ø 2.0	(x3) 044999	Longue	(x1) 044951	
N 6 - Ø 9.5	(x3) 038400	Ø 3.2	(x3) 045118		Ø 2.4	(x3) 045019			
N 7 - Ø 11	(x3) 045033	Ø 4	(x3) 047648		Ø 3.2	(x3) 045125			
N 8 - Ø 12.5	(x3) 045286				Ø 4	(x3) 047655			
N 10 - Ø 16	(x3) 045293								
N 12 - Ø 19	(x3) 045309								

PRO MOUNTING

Diffuser nozzle		Support for diffuser collar		Insulating ring diffuser		Standard insulating ring		Collet		Head cover	
N5 - Ø 8.0	(x3) 045071	Ø 1.6	(x2) 045057	(x1) 045095	(x1) 045040	Ø 1.6	(x3) 044982	Short	(x1) 044944		
N7 - Ø 11	(x3) 045088	Ø 2.0/2.4	(x2) 045064			Ø 2.0	(x3) 044999	Long	(x1) 044951		
						Ø 2.4	(x3) 045019				
						Ø 3.2	(x3) 045125				
						Ø 4	(x3) 047655				

## RECOMMENDATIONS

SR26	TIG 160 DC	PROTIG 161	PROTIG 200	PROTIG 201	TIG 220	TIG 300	TITAN		PROTIG 201 AC/DC	TIG 220 AC/DC	TIG 250 AC/DC	TITANIUM		EXATIG
							320	400				320	400	
35/50 + DIN														
35/50 + AMPHENOL		✓	✓	✓	✓	✓	✓	✓	✓	✓		✓		✓
EURO														

Recommended for MIG/MAG generators with TIG function