

KERN FCB 30K-4



The new FCB: Checkweighing and portioning scale with up to three interfaces



Maximum creep (15 minutes)	2 g
Maximum creep (30 minutes)	4 g
Loadcell type	aluminium IP65 silicone-coated

Approval	
CE mark	✓

Display	
Display type	LCD
Display screen size	120×38 mm
Display backlight	✓
Display digit height	25 mm
Languages of the user interface	English Symbol language

Construction	
Dimension housing (W×D×H)	322×267×91 mm
Dimensions completely mounted (W×D×H)	325×270×105 mm
Material display housing	Plastics
Material housing	plastic
Material weighing plate	stainless steel
Dimensions weighing surface (W×D)	252×225 mm
Transport safety lock - bolt torque	0,4 Nm
Material load cell(s)	aluminium
Levelling feet adjustable	✓

Functions	
Number of keys for operation	6
Auto-off interval(s) in battery mode/rechargeable battery mode	2 min 1 min 30 min 60 min 30 sec
Tare function	manual (multi)
Percentage determination	✓
Counting function	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Function for averaging under unstable weighing conditions	✓
Recipe/summing level	Sum A
Sum memory function	✓
Underfloor weighing	None

Category

Brand	KERN
Product category	Industrial scale
Product group	Bench scale
Product family	FCB-2024e

Measuring System

Construction type of the scale	Single-range balance
Weighing system	Strain gauge
Weighing capacity [Max]	30 kg
Weighing capacity [Max] (ct)	150000 ct
Readability [d]	0,0002 kg
Resolution	150.000
Linearity	± 0,0006 kg
Reproducibility	0,0002 kg
Default unit	kg

Units	kg g gn dwt ozt ct lb oz ffa PCS %
-------	--

Adjustment options	Adjusting with external weight
Recommended adjusting weight	20 kg (F1); 10 kg (F1)
Possible calibration points	10 kg; 20 kg; 30 kg
Stabilization time	2 s
Warm-up time	120 min
Eccentric loading at 1/3 [Max]	0,001 kg

KERN FCB 30K-4



The new FCB: Checkweighing and portioning scale with up to three interfaces

Interfaces	RS-232 (optional)
	Ethernet (optional)
	Bluetooth BLE (v4.0) (optional)
	USB-Device (optional)
	KUP WiFi (optional)
IP protection - complete device	-
IP protection - display	no IP protection
IP protection - load cell	IP65

Counting

Smallest piece weight when piece counting - laboratory conditions	200 mg
Smallest piece weight when piece counting - normal conditions	2 g
Counting reference weight can be entered	✓
Reference quantity	5, 10, 20, 50, free, Input
Counting resolution (laboratory conditions)	150.000

Power Supply

Input voltage power supply / power [Max]	100 V - 240 V AC, 50 / 60 Hz
Input voltage device / power [Max]	5,9V, 1A
Plug-in power supply type	Power adapter
Supplied power supply	Power supply unit
Plug-in power supply / adapter for countries - included with the delivery	EURO UK US CH
Plug-in power supply / adapter for countries - optional	EURO UK US CH
Rechargeable battery optional	Rchrg. battery optional
Rechargeable battery charging time	8 h
Rechargeable battery operating time - backlight on	24 h
Rechargeable battery operating time - backlight off	48 h
Battery	4×1.5 V AA
Battery / accumulator type	Li-Ion
Battery operating time	20 h

Environmental conditions

Humidity of environment [Min]	0 %
Humidity of environment [Max]	80 %

Ambient temperature [Min]	0 °C
Ambient temperature [Max]	40 °C
Storage temperature [Min]	-20 °C
Storage temperature [Max]	60 °C

Packing & Shipping


Readability force [d] (N)	1 d
Dimensions packaging (W×D×H)	395×335×200 mm
Net weight	3,91 kg
Shipping method	Parcel service
Net weight approx.	4,0 kg
Gross weight approx.	4,2 kg
Shipping weight	5,3 kg

Services (optional)

Article number for DAkkS calibration	963-128
Article number for certificate of conformity (verification)	969-517

Pictograms

STANDARD

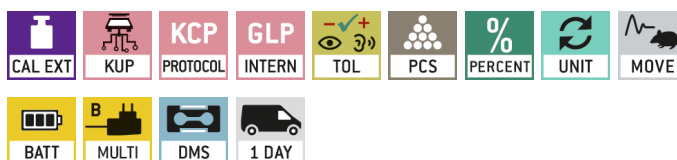

OPTION

