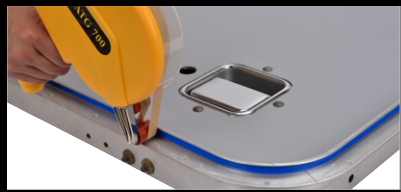
















3M™ Double Coated Tapes

														
Product number	ATG 904	ATG 924	465	ATG 976	927	ATG 969	950	ATG 926	9485PC	ATG 928	9415PC	GPT-020F	9473PC	ATG700
Properties/suitable for	General purpose	General purpose	General purpose	High tack, poly-propylene & polyethylene	High tack, poly-propylene & polyethylene	High tack, poly-propylene & polyethylene	High tack, poly-propylene & polyethylene	High performance and temperature resistance	High performance and temperature resistance	Reposition-able	Reposition-able	General purpose	Very high performance and temperature resistance	Adhesive Applicator
Key features														
Shop														

Do you have an assembly challenge?
Do you need help finding the right product for your project?

Available from:

Product Use

All statements, technical information, and recommendations contained in this document are based upon tests or experience that 3M believes are reliable and are average values not to be used for specification purposes. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluates the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method or application. All questions of liability relating to this product are governed by the terms of the sale subject, where applicable, to the prevailing law.