

Instructions For LED Beacon

Mode 1: External Powering



1. Power Input Port
2. Enhanced Magnetic Base

2. Specification

Input Voltage: DC9~30V

Light Source: SMD2835, 45pcs

Function: Clockwise Rotating, Anti-clockwise Rotating,
Fast Rotating, Dual Flashing, Quadruple Flashing,
Single Flashing, Airport Flashing Mode, SOS Flashing

Lens Material: PC

Base Material: ABS

Waterproof: IP65

Working Temperature: -20°C ~ 50°C




3. Operation Instruction (Manual Control)

Turn ON Light



Turn OFF Light

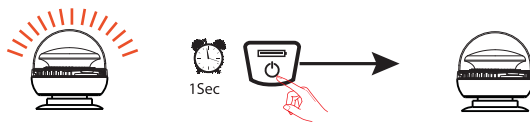

Change Function



Instructions For LED Beacon

Mode 2: Internal Powering



1. Battery Status Display
2. ON/OFF Switch /Function Switch
3. Charging Port
4. Enhanced Magnetic Base

Accessories

2. Specification

Input Voltage: DC9~30V

Light Source: SMD2835, 45pcs

Function: Clockwise Rotating, Anti-clockwise Rotating,
Fast Rotating, Dual Flashing,
Quadruple Flashing, Single Flashing
Airport Flashing Mode, SOS Flashing

Battery : Lithium battery 18650, 7.4V/2200MA

Charging time : 2~3Hours

Lens Material: PC

Base Material: ABS

Waterproof: IP65





Working Temperature: -20℃ ~ 50℃

Discharging time: Clockwise Rotating - 5 Hours
Anti-clockwise Rotating - 5 Hours
Fast Rotating - 4 Hours
Dual Flashing - 3.5~4.5 Hours
Quadruple Flashing - 3~4 Hours
Single Flashing - 3.5~4.5 Hours
Airport Flashing Mode - 3.5~4.5 Hours
SOS Flashing - 3~4 Hours



Instructions For LED Beacon

4. Charging

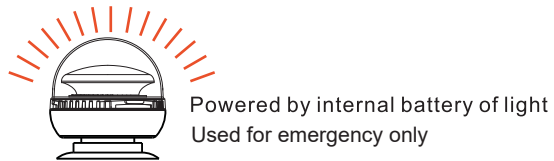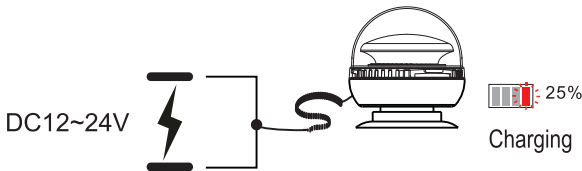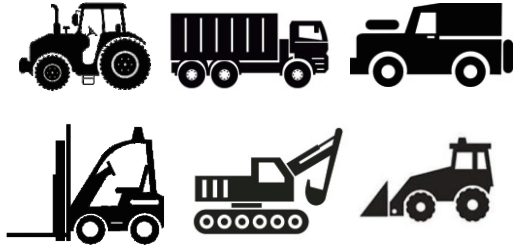

1. Fully charge battery before use
2. Check the battery life before use
3. Check light if working correctly before use
4. Charge the battery every 6 months if not in use
5. Check light regularly when use for long hours
6. The beacon meets the R65 standard of E-mark only when it's powered by car battery power. The beacon is used for emergency situations when it's powered by internal battery, we strongly recommend that you use the beacon under lawful conditions.

