


2170950	DATA SHEET	
Valid from: 01.05.2018	ETHERLINE® LAN 200 Cat.5e U/UTP	

Description

ETHERLINE® LAN 200 Cat.5e U/UTP is an installation cable for structured horizontal cabling. These cables are ideal for LAN data transmission in all Ethernet (IEEE 802.3) applications up to 1000 Base-T. IEC 61156-5/ISO/IEC 11801, EN 50173-1, EIA/TIA 568C.2

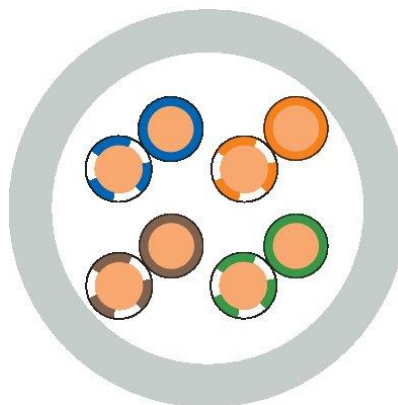

General characteristics

Conductor	Solid bare copper wire, AWG 24/1
Insulation	solid Polyethylene,
Core identification code	Pair 1: white/blue – blue, Pair 2: white/orange – orange, Pair 3: white/green – green, Pair 4: white/brown – brown
Stranding	two cores stranded to pairs
Outer sheath	PVC compound outer Ø: approx. 5.1 mm color: grey similar to RAL 7035

Mechanical characteristics

Minimum bending radius	at installation: 4 x cable Ø fixed installation: 8 x cable Ø
Permissible temperature range	at installation: 0 °C up to +50 °C fixed installation: -20 °C up to +60 °C
Flame propagation	flame retardant acc. to IEC 60332-1-2
Classification of fire behaviour acc. to EU Regulation 305/2011 (CPR)	Eca (acc. to EN13501-6 and EN50575)

Creator: TOST/PDC Released: HAPF/PDC	Document: DB2170950EN Version: 01	Page 1 of 2
---	--------------------------------------	-------------

2170950	DATA SHEET	
Valid from: 01.05.2018	ETHERLINE® LAN 200 Cat.5e U/UTP	

Electrical characteristics

DC-Resistance (loop)	max. 176.0 Ω /km
Insulation resistance	min. 5 G Ω x km
Mutual capacitance	nom. 50 nF/km at 1 kHz
Characteristic impedance	nom. 100 Ω acc. to IEC 61156-5
Operating peak voltage	125 V (not for power purposes)
velocity of propagation	approx. 0.67 c
Signal propagation time	510 ns / 100 m
Delay difference	20 ns / 100 m
Test voltage	core/core: 700 V

Transmission properties

Transmission properties acc. to IEC 61156-5 for Category Cat.5e:

f [MHz]	Attenuation [dB/100m]		PS NEXT [dB]		EL FEXT [dB]		Return Loss [dB]	
	standard	typical	standard	typical	standard	typical	standard	typical
1*	2.1	1.9	65	73	64	72	20.0	28
4	4.1	3.8	56	65	52	60	23.0	30
10	6.5	6.0	50	60	44	55	25.0	30
16	8.3	7.7	47	58	40	50	25.0	32
31,25	11.7	10.9	43	52	34	44	23.6	30
62,5	17.0	15.7	38	49	28	41	21.5	28
100	22.0	19.8	35	42	24	36	20.1	25
155	-	25.8	-	39	-	29	-	22
200	-	29.4	-	37	-	25	-	22

* Extract of normative minimum requirements

Standard

EU-Directive	Dangerous and forbidden substances acc. to RoHS directive (2011/65/EU) are not allowed to the manufacturing.
--------------	--

Creator: TOST/PDC Released: HAPF/PDC	Document: DB2170950EN Version: 01	Page 2 of 2
---	--------------------------------------	-------------