




**Part Number :** [469911024](#)  
**Product Description :** Mini-Fit Jr. Reflow Solder Capable Header, Right-Angle, Dual Row, 24 Circuits, without Mounting Peg, Tin (Sn) Over Nickel (Ni) Plating, Glow-Wire Capable  
**Series Number :** 46991  
**Status :** Active  
**Product Category :** PCB Headers and Receptacles

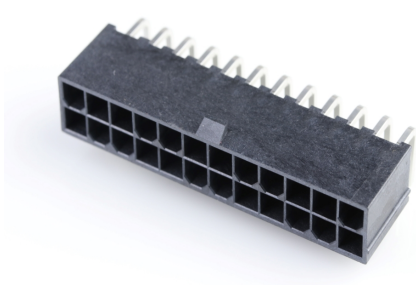

## Documents & Resources

**Drawings**  
[469911024\\_sd.pdf](#)  
[PK-5569-003-001.pdf](#)

**3D Models and Design Files**  
[469911024\\_stp.zip](#)

**Specifications**  
[55560002-AS-000.pdf](#)  
[PS-45750-001-001.pdf](#)  
[55560004-PS-CH-000.pdf](#)  
[55560004-PS-ES-000.pdf](#)  
[55560004-PS-SK-000.pdf](#)  
[PS-5556-004-001.pdf](#)

## Product Environment Compliance

### Compliance

|                    |                                                                                       |
|--------------------|---------------------------------------------------------------------------------------|
| GADSL/IMDS         | Compliant with Exemption 44; 33                                                       |
| China RoHS         |  |
| EU ELV             | Not Relevant                                                                          |
| Low-Halogen Status | Low-Halogen per IEC 61249-2-21                                                        |
| REACH SVHC         | Not Contained per D(2024)6225-DC (07 Nov 2024)                                        |
| EU RoHS            | Compliant per EU 2015/863                                                             |

Multiple Part Product Compliance Statements  
- Eu RoHS

- REACH SVHC
- Low-Halogen

#### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

#### EU RoHS Certificate of Compliance

---

### Part Details

#### General

|             |                                                                                                                                                           |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Status      | Active                                                                                                                                                    |
| Category    | PCB Headers and Receptacles                                                                                                                               |
| Series      | 46991                                                                                                                                                     |
| Description | Mini-Fit Jr. Reflow Solder Capable Header, Right-Angle, Dual Row, 24 Circuits, without Mounting Peg, Tin (Sn) Over Nickel (Ni) Plating, Glow-Wire Capable |
| Application | Board-to-Board, Power, Wire-to-Board                                                                                                                      |

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Comments       | Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 Mini-Fit Plus HCS Crimp Terminal Crimped to 16 AWG wire. See Molex product specification PS-45750-001 for additional current de-rating information. This Molex product is manufactured from material that has the following ratings, tested by independent agencies: a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12 and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety; section 30 Resistance to heat and fire. The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. |
| Component Type | PCB Header                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Product Name   | Mini-Fit Jr.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| UPC            | 883906760069                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

#### Agency

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

#### Electrical

|                               |                  |
|-------------------------------|------------------|
| Current - Maximum per Contact | 13.0A            |
| Voltage - Maximum             | 600V AC (RMS)/DC |

#### Physical

|                   |    |
|-------------------|----|
| Breakaway         | No |
| Circuits (Loaded) | 24 |

|                                |                                |
|--------------------------------|--------------------------------|
| Circuits (maximum)             | 24                             |
| Color - Resin                  | Black                          |
| Durability (mating cycles max) | 75                             |
| First Mate / Last Break        | No                             |
| Flammability                   | 94V-0                          |
| Glow-Wire Capable              | Yes                            |
| Guide to Mating Part           | No                             |
| Lock to Mating Part            | Yes                            |
| Material - Metal               | Brass                          |
| Material - Plating Mating      | Matte Tin                      |
| Material - Plating Termination | Matte Tin                      |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 9.907/g                        |
| Number of Rows                 | 2                              |
| Orientation                    | Right Angle                    |
| Packaging Type                 | Tray                           |
| PC Tail Length                 | 3.30mm                         |
| PCB Locator                    | Yes                            |
| PCB Retention                  | Yes                            |
| PCB Thickness - Recommended    | 1.78mm                         |
| Pitch - Mating Interface       | 4.20mm                         |
| Pitch - Termination Interface  | 4.20mm                         |
| Polarized to Mating Part       | Yes                            |
| Polarized to PCB               | Yes                            |
| Shrouded                       | Fully                          |
| Stackable                      | No                             |
| Temperature Range - Operating  | -40° to +105°C                 |
| Termination Interface Style    | Through Hole                   |

## Solder Process Data

|                              |          |
|------------------------------|----------|
| Max-Duration                 | 30       |
| Lead-Free Process Capability | SMC&WAVE |
| Max-Cycle                    | 1        |
| Max-Temp                     | 260      |

---

## Mates With / Use With

### Mates with Part(s)

| Description                                                      | Part Number   |
|------------------------------------------------------------------|---------------|
| Mini-Fit TPA2 and Mini-Fit Sigma<br>Dual Row Receptacle Housings | <u>172708</u> |
| Mini-Fit Jr. Receptacle Housings                                 | <u>5557</u>   |

---

This document was generated on Feb 26, 2025

---