



STYLE ONLY	SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
DATE '91/03/29	TITLE 0.5 FPC CONN ZIF FOR SMT R/A(BOTTOM CONTACT)		
DATE '97/07/14			
DATE '97/07/14	 MOLEX INCORPORATED		
CHART	DOCUMENT NO. SD-52437-*27		SHEET NO. 2 OF 2

DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISED	EC NO: J2005-0980				2004/10/01		2004/10/01		2004/10/12		
	DRAWN: MWABEI				CHKD: K10J0		APPR: NUKITA				
	DESCRIPTION										
	GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION STYLE MM ONLY				SCALE ---		
	10 UNDER ± 0.2				DRAWN BY DATE SKAJINUM '91/03/29				TITLE 0.5 FPC CONN ZIF FOR SMT R/A(BOTTOM CONTACT)		
	10 OVER 30 UNDER ± 0.25				CHECKED BY DATE MFUKUSHI '97/07/14						
30 OVER ± 0.3				APPROVED BY DATE MFUKUSHI '97/07/14				MOLEX MOLEX INCORPORATED			
ANGULAR ± 3 °				MATERIAL NO.				DOCUMENT NO.			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE CHART				SD-52437--*27			
REV				SIZE A3				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
								SHEET NO. 2 OF 2			

DWG. NO.
SD-52437-**-91

E

D

C

B

A

1:MM

DIMENSIONS IN METRIC DO NOT SCALE DRAWING

8

7

6

5




4

3

2

1

引き出し方向
PULL OUT
DIRECTION




DETAIL "E"

5. 材料 (MATERIAL)

キャリアテープ (CARRIER TAPE) : ポリプロピレン (POLYPROPYLENE)
トップテープ (TOPTAPE) : PET, PE, PEF
リール (REEL) : ポリスチレン (PS) <リサイクル材を含む>
POLYSTYREN (PS) <RECYCLE MATERIAL CONTAINED>

注記 NOTES

- 製品番号 52437-**-27 の梱包状態はアフチュエータがロックした状態とする。
詳細寸法については図面 SD-52437-**-27 を参照下さい。
IN THE PACKAGE, ACTUATOR OF PART NO.52437-**-27 SHOULD BE LOCKED
RE DETAILED DIMENSIONS, SEE SD-52437-**-27
- 梱包数量 : 1000個/リール
NUMBER OF CONNECTORS: 1000PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

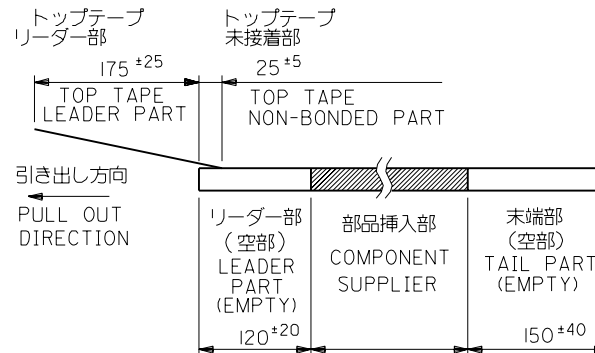

4. トップテープの剥離強度 : (剥離方向は下図参照)

0.1N~0.7N (10.2gf~71.4gf)

尚、本規格値は、出荷時に適用。

(但し、輸送時に剥離が発生しない事。)


PEELING OFF FORCE OF TOP TAPE

0.1N~0.7N (10.2gf~71.4gf) (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT

PEEL OFF SHOULD NOT BE ALLOWED,

DURING TRANSPORTATION



F 変更 REVISED		UC2001-0458	1.0	00/12/15	材料 MATERIAL	注記参照 SEE NOTES	molex MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社
E 変更 REVISED		(J41005)	1.0	94/12/15	仕上げ FINISH	—	
D 変更 REVISED		(J40900)	1.0	94/11/11	適用電線範囲 WIRE RANGE	—	REVISE ONLY ON CAD SYSTEM
C 変更 REVISED		(J30060)	1.0	93/1/25	被覆外径 INS. RANGE	—	TITLE 名称
B 変更 REVISED		(J20834)	1.0	92/9/14	DRAWN BY 91/3/29 S.KAJINUMA	CHK'D BY 00/12/20 S.KUNISHI	0.5 FPC Conn ZIF SMT R/A
A 変更 REVISED		(J20554)	1.0	92/7/16	APP'D BY 00/12/20 M.FUKUSHIMA	尺度 SCALE	With Tape Embstp Pkg
O 新規作成 PROPOSED		(J10236)	1.0	91/3/29	DR. 日付 CHK. DATE	尺度 SCALE	DWG. NO. (SHEET 1 OF 3) REV
一般公差 GENERAL TOLERANCES		記号 LTR	変更内容 REVISION RECORD	DR. 日付 CHK. DATE	尺度 SCALE	尺度 SCALE	SD-52437-**-91 F

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス (株) の所有する情報を含むもので 当社の許可なく複製を禁止する。

EN-01C(032)MXJ-32

8

7

6




5

4

3

2

1

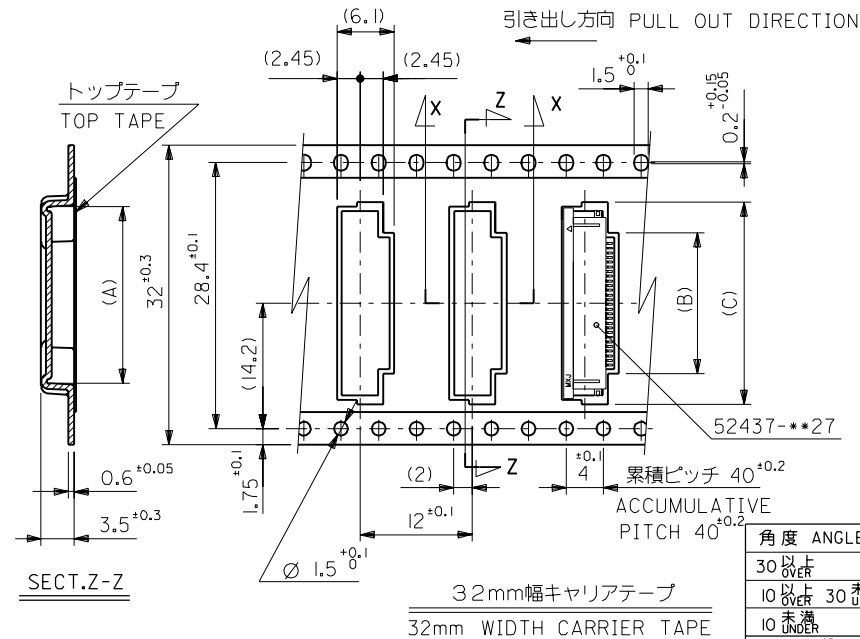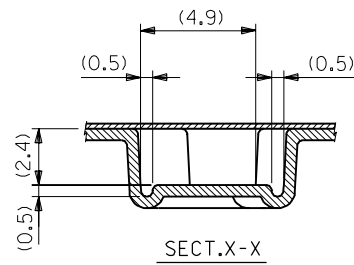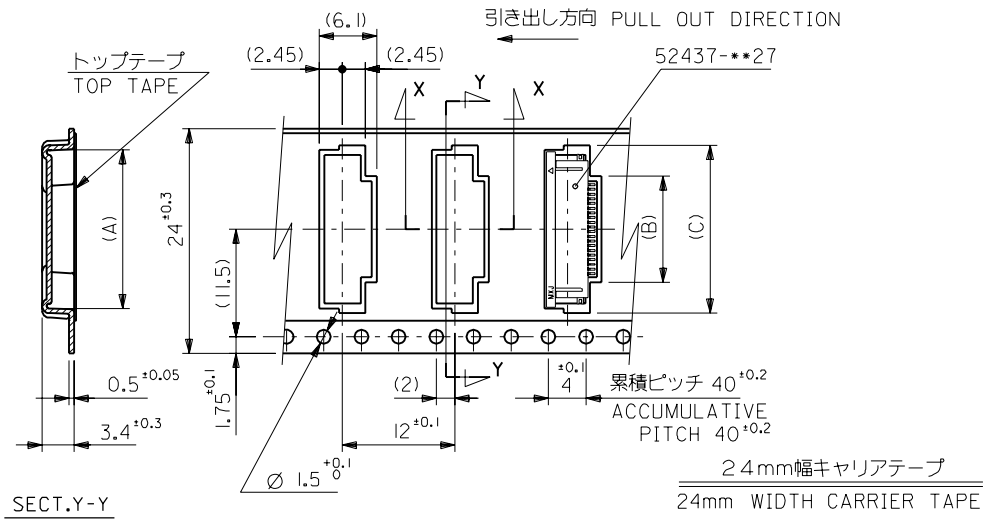

32	33.5	22.4	15.8	21.4	52437-2991	29	
		21.9	15.3	20.9	-2891	28	
		21.4	14.8	20.4	-2791	27	
		20.9	14.3	19.9	-2691	26	
		20.4	13.8	19.4	-2591	25	
		19.9	13.3	18.9	-2491	24	
		19.4	12.8	18.4	-2391	23	
		18.9	12.3	17.9	-2291	22	
24	25.5	17.9	11.3	16.9	-2091	20	
		17.4	10.8	16.4	-1991	19	
		16.9	10.3	15.9	-1891	18	
		16.4	9.8	15.4	-1791	17	
		15.9	9.3	14.9	-1691	16	
		15.4	8.8	14.4	-1591	15	
		14.9	8.3	13.9	-1491	14	
		14.4	7.8	13.4	-1391	13	
		13.9	7.3	12.9	-1291	12	
		13.4	6.8	12.4	-1191	11	
		12.9	6.3	11.9	-1091	10	
		12.4	5.8	11.4	-0991	9	
		11.9	5.3	10.9	-0891	8	
		11.4	4.8	10.4	-0791	7	
10.9	4.3	9.9	52437-0691	6			
キャリアテープ幅 CARRIER TAPE WIDTH		D	(C)	(B)	(A)	ENG. NO.	極数 CIRCUIT

F	変更 REVISED	(JC2001-0458)	Y.M.	'00/12/15
E	変更 REVISED	(J41005)	T.A.	'94/12/13
D	変更 REVISED	(J40900)	T.A.	'94/11/11
C	変更 REVISED	(J30060)	S.K.	'93/1/25
B	変更 REVISED	(J20834)	S.K.	'92/9/14
A	変更 REVISED	(J20554)	S.K.	'92/7/16
O	新規作成 PROPOSED	(J10236)	S.K.	'91/3/29
記号 LTR	変更内容 REVISION RECORD	DR.	日付 DATE	CHK.

角度 ANGLE	±3°
30以上 OVER	±0.3
10以上 30未満 OVER UNDER	±0.25
10未満 UNDER	±0.2
一般公差 GENERAL TOLERANCES	

材料 MATERIAL	SHEET 1 OF 3 参照 REFER TO SHEET 1 OF 3
仕上げ FINISH	—
適用電線範囲 WIRE RANGE	—
被覆外径 INS. RANGE	—
DRAWN BY '91/3/29 S.KAJINUMA	CHK'D BY '00/12/20 S.KUNISHI
APP'D BY '00/12/20 M.FUKUSHIMA	尺度 SCALE —

材料 MATERIAL	SHEET 1 OF 3 参照 REFER TO SHEET 1 OF 3
仕上げ FINISH	—
適用電線範囲 WIRE RANGE	—
被覆外径 INS. RANGE	—
DRAWN BY '91/3/29 S.KAJINUMA	CHK'D BY '00/12/20 S.KUNISHI
APP'D BY '00/12/20 M.FUKUSHIMA	尺度 SCALE —

材料 MATERIAL	SHEET 1 OF 3 参照 REFER TO SHEET 1 OF 3
仕上げ FINISH	—
適用電線範囲 WIRE RANGE	—
被覆外径 INS. RANGE	—
DRAWN BY '91/3/29 S.KAJINUMA	CHK'D BY '00/12/20 S.KUNISHI
APP'D BY '00/12/20 M.FUKUSHIMA	尺度 SCALE —

