

FASTON Terminals
Insulated and Uninsulated

TE connectivity

Table of Contents

FASTON Terminals
Introduction . . . 3
Product Information and Crimp Styles . . . 4, 5
Receptacle Lines . . . 6
Product Specifications . . . 7-9

FASTON Receptacles
Introduction . . . 10
312 Series . . . 11
250 Series . . . 11-19
205 Series . . . 20
187 Series . . . 21-25
125 Series . . . 26
110 Series . . . 26-28
AMPLIVAR Receptacles (for use with Magnet Wire) . . . 29, 30
Miscellaneous Tab Receptacles . . . 31

FASTON Tabs
312 and 250 Series (High Temperature) . . . 32
250 through .060 Series . . . 33, 34
AMPLIVAR Tabs (for use with Magnet Wire) . . . 35
Weld Type Tabs . . . 36
Stud Mount Type Tabs . . . 36-39
Test Tabs . . . 40, 41
FASTON Tab Adapters . . . 42

FASTON Printed Circuit Board Tabs and Receptacles
Introduction . . . 43
250 Series through 110 Series . . . 44-49
Right Angle Printed Circuit Board Tabs . . . 48, 49
RAST 5 Tab Header Assembly . . . 50, 51

FASTON Housings . . . 52-59

FASTIN-FASTON Product Line . . . 60-73
Introduction . . . 60
250 Series through 110 Series . . . 61-68
RAST 5 Tab Housings . . . 69-73

FASTON Terminals Strip/Loose Piece Cross Reference . . . 74

Positive Lock Receptacles
Introduction . . . 75
Mark I Series . . . 76, 77
Mark II Series . . . 78-83
Positive Lock EX . . . 83
Mark III Series . . . 84, 85
110 Series . . . 86

Positive Lock RAST 5 Connector System . . . 87, 88

Ultra-Fast Fully Insulated FASTON Receptacles and Tabs . . . 89-92

Ultra-Fast Plus Fully Insulated FASTON Receptacles and Tabs . . . 93, 94

Ultra-Pod Fully Insulated FASTON Receptacles and Tabs . . . 95-98

PIDG FASTON Receptacles and Tabs . . . 99-103

Application Tooling . . . 104-110

Technical Documents . . . 111

Part Number Index . . . 112-115

Disclaimer

While TE has made every reasonable effort to ensure the accuracy of the information in this catalog, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

© Copyright 2011, 2010, 2007, 2006, 2004, 1998, 1990, 1989, 1979, 1977, 1974, 1970, 1966 and 1963 Tyco Electronics Corporation. All Rights Reserved.

AMP, AMPIP, AMPLIVAR, AMP MONO-SHAPE, AMP-O-LECTRIC, AMPOMATOR, AMP-TAPETRONIC, CERTI-CRIMP, EDGE, FASTIN-FASTON, FASTON, MATE-N-LOK, PIDG, PLASTI-GRIP, Positive Lock, Potter & Brumfield, PRO-CRIMPER, TETRA-CRIMP, TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks of the TE Connectivity Ltd family of companies.

Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Introduction

As noted, FASTON products meet or exceed industry standards UL-310 listed UL file No. E66717.

Recognized under the Component Program of Underwriters Laboratories Inc. electrical UL file no. E28476, and E13288

CSA certified file no. LR 7189A-509

■ **Produced under a Quality Management System certified to ISO 9001**

A copy of the certificate is available upon request.

The FASTON terminal product line includes Ultra-Fast, Ultra-Fast Plus and Ultra-Pod fully insulated FASTON terminals, as well as Positive Lock receptacles consisting of receptacles, tabs and splices specifically designed for quick connections. FASTON products are grouped according to tab width dimensions in series “312”, “250”, “205”, “187”, “125” and “110”. This product line offers speed of application, uniform reliability and low per line cost. These advantages have made FASTON products the number one choice of many leaders in the appliance and automotive industries. Other industries for FASTON products are computer and peripheral equipment, industrial controllers, test equipment and telecommunications equipment manufacturers.

Speed of application is achieved through the use of application tools for which a complete line has been developed specifically for these terminals. See application tooling section in back of catalog for general information. Specific rates and capabilities can be obtained by contacting technical support at the numbers listed below.

Precisely controlled crimping specifications for each FASTON terminal allow all connections to perform as specified. Low per line costs are derived from low initial product costs, high application speeds, and plug-in assemblies of the finished termination. While it’s true that we have over fifty years of proven reliability behind our product, we are not content to rest. We are constantly striving to introduce new and improved products to add to our quick connect family. Positive Lock RAST 5 connectors, Ultra-Pod Positive Lock, C-Crimp flags and our ever expanding offering of printed circuit board tabs and receptacles are examples of recent additions to the FASTON product family.

It is our commitment to innovation and continuous improvement that allows the FASTON terminal product line to remain the leader in the industry.

Need more information?

Call Technical Support at the numbers listed in the footer of every page.

Technical Support is staffed with specialists well versed in all TE Connectivity products. They can provide you with:

- Technical Support
- Catalogs
- Technical Documents
- Product Samples
- TE Authorized Distributor Locations

Check the electronic catalog for the most up-to-date information.

Restriction on the use of Hazardous Substances (RoHS)

At TE, we’re ready to support your RoHS requirements. We’ve assessed more than 1.5 million end items/components for RoHS compliance, and issued new part numbers where any change was required to eliminate the restricted materials. Part numbers in this catalog are identified as:

RoHS Compliant — Part numbers in this catalog are RoHS Compliant, unless marked otherwise. These products comply with European Union Directive 2002/95/EC as amended 1 January 2006 that restricts the use of lead, mercury, cadmium, hexavalent chromium, PBB, and PBDE in certain electrical and electronic products sold into the EU as of 1 July 2006.

NOTE: For purposes of this Catalog, included within the definition of RoHS Compliant are products that are clearly “Out of Scope” of the RoHS Directive such as hand tools and other non-electrical accessories.

NOTE: Information regarding RoHS compliance is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information provided by our suppliers. This information is subject to change. For latest compliance status, refer to our website referenced at right.

Getting the Information You Need

Our comprehensive on-line RoHS Customer Support Center provides a forum to answer your questions and support your RoHS needs. A RoHS FAQ (Frequently Asked Questions) is available with links to more detailed information. You can also submit RoHS questions and receive a response within 24 hours during a normal work week. The Support Center also provides:

- Cross-Reference from Non-compliant to Compliant Products
- Ability to browse RoHS Compliant Products in our on-line catalog
- Downloadable Technical Data Customer Information Presentation
- More detailed information regarding the definitions used above
- So whatever your questions when it comes to RoHS, we have the answers at www.te.com/leadfree

RoHS Customer Support Center

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

The Products

The TE family of quick connects provides the right product for most applications. All styles provide features to enhance quality and reliability of interconnections. The FASTON product line consists of two mating parts—the receptacle and the tab. Receptacles are available in both straight and flag configurations and come in a variety of sizes. They are designed numerically by a series number that corresponds to the width of the mating tab. There are six series of both straight-on and flag receptacles "312", "250", "205", "187", "125", and "110".

Product Styles

Flag Receptacles



The flag receptacle is a reliable termination for those applications where space is a critical factor. Connection with mating tab is at right-angle to axis of conductor. Typical installations include bussing switches in back-splashes of ranges or in similar heavy duty applications.

Straight Receptacles



Straight receptacles are made with or without insulation support. Insulation diameters of .040–.230 are accommodated by the insulation support receptacle. Another feature of this type is a step-down insulation support barrel to compensate for insulation thickness to maintain axial alignment of the conductor strands. Over-insertion of shoulderless tabs is prevented by tapering walls at the rear of the receptacle.

Wire Crimp Tabs



The wire crimp tabs are designed for line splices and other special applications. They can be applied to 22-14 AWG wire with "F" crimp termination and include insulation support. The wire crimp tab is also available with AMPLIVAR connector type serrations for magnet wire applications.

Printed Circuit Board Tabs



These tabs are designed to be inserted into holes in PC boards, then attached permanently during the soldering operation. They can be hand inserted or machine inserted using TE application equipment.

Board Mount Tabs



Board mount tabs are available in all the series. These tabs are mounted using rivets or screws through stud holes. They are available in single 90 degree configurations, straight and angled versions, dual versions (90, 45 degree and straight), weld tab versions and special configurations.

Locking Action and Contact Area



Since corrosion and oxidation tend to affect performance by cutting down contact areas and increasing the constriction resistance of connections, maximum contact areas are incorporated in the design of FASTON receptacles and tabs. The design also includes a dimple detent and web section which not only increases contact surfaces but also locks in the tab and receptacles at proper insertion depth for firm retention.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

The Products (Continued)

Crimp Styles

The "F" Crimp



The standard crimp on all straight and certain flag type FASTON terminals is the "F" crimp. Experience over widespread segments of the industry has proved this crimp the most effective way of providing stable electrical and mechanical performance. Applied with match-mated tooling, the "F" crimp offers the optimum combination of mechanical strength and electrical conductivity. This method of termination also provides maximum resistance to vibration and corrosion.

Tab-Lok Crimp for FASTON Flag Terminals



In making this crimp, a tab on the wire barrel, is inserted through a slot in the terminal itself. The crimping action is continued by flattening the tab between two lances which in turn are locked over the tab. The wire connection is locked in to offer reliable electrical and mechanical performance. This receptacle design includes a lance-tab stop at its rear to avoid over-insertion of shoulderless tabs.

The "C" Crimp



A new style crimp with wrap-around barrel design with the standard, reliable FASTON receptacle. The special barrel design provides a maximum contact area and when applied with the matched tooling, will provide reliable electrical and mechanical performance at a minimum terminal profile.

Available in the 187 series for both .020 and .032 thick tabs, brass or phosphorous bronze base materials in either plain or tin plated.

TETRA-CRIMP Terminal Crimp



This reliable crimp is used on PIDG FASTON receptacles. The terminals feature nylon insulation fitted over a copper support sleeve. PIDG FASTON receptacles are of the straight variety only, and are available in strip form or tape mounted for high-speed application with automatic crimping machines, or in loose piece form for application with hand tools.

Corrugated Keystone Barrel Serrations



This special terminal wire barrel design provides maximum contact area between terminal and bare conductor. During the crimping process, bulk deformation forces the conductor into these serration channels creating a scrubbing action on oxide film on the wire. The termination is also resistant to vibration and shock.

AMPLIVAR Terminal Crimp



This crimp is designed for reliable, high-speed connection of magnet wire. The conductor(s) is automatically multiple-ring stripped and forced into sharp serrations with a single precision-controlled solderless crimp. This operation produces a strong, air-tight termination that is as resistant to corrosion and many other environmental effects as the insulated conductor itself.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Receptacle Product Lines



Premier

The receptacle configuration of the premier line, with its resilient rolls and double slot bottom allows maximum compliancy while retaining the high normal forces necessary to provide good wiping action and highly reliable interface. The basis to the resiliency of the premier line receptacle is in the *thermal stress relieving* each terminal receives. This extra processing step relieves the residual stresses the stamping process imparts and allows the receptacle to resist the effects of over-stressing, while retaining the normal forces which provide good cleaning action and low, stable resistance under a variety of operating conditions.



Budget

The budget line receptacles are constructed similar to the premier line and are easily distinguished by the single slot. The single most important difference between the budget line and premier line is that the budget line does not receive the special processing of the premier line. In addition, in the .250 series, the budget line receptacles are constructed of lighter .016 brass.



Economy

The economy line receptacle is separated from its counterparts by the large lead-in provided by its flared, relatively low, roll construction. This roll construction and lead-in, with tab contact coming on the mill finish of the brass instead of a profiled edge, makes for lower average insertion forces at relatively high normal forces.



Low Insertion Force

The Low Insertion Force (LIF) type receptacle offers lower insertion forces than the other receptacle styles thru the unique design features of a two-stage receptacle and a cantilever mounted locking dimple.



Positive Lock

Positive Lock receptacles are designed with reduced mating forces, and a large locking dimple on a flexible latch. This locking feature acknowledges proper mating with an audible “snap” of the dimple into the mating hole. This enhances safety and reliability of the mated pair for isolated and hard to reach areas. Until the release latch is depressed manually the receptacle cannot be removed.



Hermetic

The hermetic receptacle is a premier line receptacle which has been designed to mate with the posted header tabs in hermetic motor applications. This receptacle provides all the features and benefits of the premier line.



Moldable

The moldable receptacle is available in many of the same configurations shown and is produced without slots or openings in the floor of the receptacle to facilitate over-molding.



Commercial

The commercial receptacles, with their abbreviated roll construction, conserve stock, have generally higher insertion forces and somewhat lower tolerance for general abuse.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Test Specifications

Operating Temperatures of Materials and Finishes

FASTON terminals are made available in brass and phosphor bronze which can be plated with tin or silver. The line also includes a selection of nickel plated steel tabs and receptacles.

Certain products are available in either pre-tin or tin plated. Tin plate is the electro-depositing of tin on base metal over the entire surface of the terminal following the fabrication of the terminal. Pre-tin plate is the plating of tin on base metal prior to fabrication which produces exposed base metal in the terminal edge areas after stamping.

Brass

Plain

Allowable connection temperature* — 110°C.

Plain brass is used frequently, where applications have optimal environmental conditions.

Tin Plated

Allowable connection temperature — 110°C.

Tin plating of receptacle and tab improves operation at higher temperatures, and in addition helps to protect the connection against corrosion.

Silver Plated

Allowable connection temperature — 130°C.

Silver plated connections allow the highest operating temperature for brass and a higher current-carrying capacity.

* Allowable connection temperature is the ambient temperature plus temperature rise of the terminal at normal operating conditions.

Phosphor Bronze

Plain

Allowable connection temperature — 110°C.

Phosphor bronze is used in applications where brass would normally be corroded, for example the various freezing mixtures and ammonias.

Tin Plated

Allowable connection temperature — 110°C.

Tin plating of receptacle and tab improves operation at higher temperatures, and in addition helps to protect the connection against corrosion.

Silver Plated

Allowable connection temperature — 130°C.

Silver plated connections allow the highest operating temperature for phosphor bronze and higher current-carrying capacity.

Steel

Nickel Plated

Allowable connection temperature — 250°C.

This combination allows a reliable connection at high temperatures, for example in stoves, cooking appliances, etc. For optimum performance, these nickel plated receptacles are used with compatible lead wires and tabs that can be welded to heating units.

Plastics (Insulation)

Material Temperature Rating —

The following list shows various plastics and their application temperatures.

High temp. polyamide (nylon) . . . . . 150°C
Polyamide, (nylon) . . . 125°C
Polypropylene . . . . . 105°C
Polyester. . . . . 90°C
Polyethylene. . . . . 75°C
A.B.S. . . . . 70°C
PVC. . . . . 60°C

Note: For information related to Glow Wire temperature ratings, contact TE Engineering.

Stress Relieving of Brass or Steel Receptacles

The process of stress relieving is unique to TE quick connects and is most commonly used in the production of those receptacles designated as premier line, including Ultra-Fast, Ultra-Fast Plus FASTON and PIDG receptacles. Stress is introduced into copper alloy or steel terminals during the stamping process. When metal strip is formed into the receptacle, the material is deformed beyond its yield stress to form it into its new shape. This forming operation leaves a residual stress in the grain structure. The orientations and magnitudes of the forming stresses are complex, but can exist in the same direction as the applied load. Thus, residual stresses can reduce the force necessary to open the receptacle during the tab insertion. Stress relieving the terminal restores the elastic spring properties and improves receptacle performance by reducing the residual stresses. After stress relieving, the receptacle resists opening when a tab is inserted, especially where difficult or awkward mating situations may cause mechanical abuse.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Test Specifications (Continued)

Test Specifications

The following information and related charts are taken from the qualification requirements as defined in UL-310, the safety standard for electrical Quick-Connect terminals. Throughout this catalog, when a reference is made to a part being UL listed, that part has been qualified to the standards shown in these charts.

Temperature Rise and Millivolt Drop

The temperature rise and millivolt drop characteristics are the lowest in the industry. They comply with safety requirements and exhibit extreme stability during extended time tests.

When using FASTON terminals, the allowable connection temperatures can be adjusted, based on the application, by considering actual current(s) and related temperature rise, time at this temperature, humidity, corrosion environment, vibration, base metal, plating (if any), and other environmental considerations.

Test Parameters for FASTON Terminals (Based on UL-310 Temperature Rise and Current Requirements)

Contact Size	Wire Size (Strand Count)	Continuous Current	Intermittent Current
250 Series	10 (105)	24	48
	12 (65)	20	40
205 Series	14 (41)	15	30
	16 (26)	10	20
187 Series	18 (16)	7	14
	20 (10)	4	8
	22 (7)	3	6
110 Series	16 (26)	5	10
	18 (16)	4	8
	20 (10)	3	6
	22 (7)	2	4

Note: This information applies only to UL listed (UL) terminals. A part with a component recognition (R) status deviates from the electrical or other requirements defined in the UL-310 safety standard.

This table can be used as a guide for selecting a characteristic such as contact size, wire size, or current (either continuous or intermittent operating current) when the other two are known. This table also identifies the possible receptacle sizes available for a given wire size. The continuous current column highlights the maximum current that should be applied to a given receptacle and wire combination to meet a 30°C maximum temperature rise. Intermittent current can be defined as a one hour cycle consisting of 45 minutes on and 15 minutes off. The temperature rise of the connector using the intermittent current on the corresponding wire size will be less than 85° C. The wire used in the testing to meet these electrical requirements is tin plated copper with stranding as indicated above in parentheses for terminals intended for internal wiring connections.

Tensile Strength (forces for crimp pull-out)

Maximum tensile strength of the wire to terminal connection does not insure reliable electrical performance. An acceptable compromise between maximum tensile strength and electrical stability is recommended.

Normally the tensile strength is much greater than the force required to disconnect the tab from the receptacle; therefore, no difficulties or hazards are encountered.

Forces for Crimp Pull-out Test (UL-310 Specification)

Wire Size		Minimum Force	
AWG	(mm^2)	pounds	N
22	0.32	8	36
20	0.52	13	58
18	0.82	20	89
16	1.3	30	133
14	2.1	50	223
12	3.3	70	311
10	5.3	80	356

The forces shown for the crimp pull out test represent the minimum force required to separate the wire from the crimped terminal in an axis parallel to the wire exit direction from the contact. This force does not include the holding force of the insulation crimp (if applicable).

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Test Specifications (Continued)

Insertion and Withdrawal Forces for Engagement-Disengagement

The UL-310 safety standard defines a broad range for the insertion and extraction value of each connector series. Many of the FASTON product families (such as premier line, budget line, low insertion force type, etc.) have been designed for specific applications and to address forces within the overall range as defined in the chart.

Insertion and Withdrawal Forces for Engagement-Disengagement Test (UL-310 Specification)

Tab Size	Force, pounds (N)					
	First Insertion, Maximum Individual	First withdrawal			Sixth withdrawal	
		Maximum	Minimum		Minimum	
			Average	Individual	Average	Individual
Test Tab and Unplated Connector						
.250 6.30	18 (80)	18 (80)	6 (27)	4 (18)	5 (22)	4 (18)
.205 5.20 / **.187** 4.80	15 (67)	20 (89)	5 (22)	3 (13)	3 (13)	2 (9)
.125 3.20 / **.110** 2.80	12 (53)	14 (62)	3 (13)	2 (9)	2 (9)	1 (4)
Test Tab and Tin Plated Connector						
.250 6.30	17 (76)	17 (76)	5 (22)	3 (13)	4 (18)	3 (13)
.205 5.20 / **.187** 4.80	15 (67)	20 (89)	5 (22)	3 (13)	3 (13)	2 (9)
.125 3.20 / **.110** 2.80	12 (53)	14 (62)	3 (13)	2 (9)	2 (9)	1 (4)

This chart show the forces required to engage and disengage a connector from a **plain brass test tab** (tab for mechanical testing as shown in the tab section of this catalog). The force is measured with a testing device capable of holding the reading and providing accurate alignment with slow and steady engagement and disengagement of the connector and test tab.

Vibration Resistance

In applications where conductors are subjected to flexing at termination points, circuit failure is avoided because resistance to vibration is enhanced through TE insulation support, even on conductors with oversized insulation.

Wire Range

FASTON receptacles are available in various wire ranges from 26-10 AWG, depending on series size. The chart below is designed to show our recommended two-wire combinations.

Specific wire and insulation combinations should be evaluated for suitability and not all combinations may be appropriate for high speed or automatic termination equipment.

Recommended Two-Wire Combinations

Wire Ranges																
8-10	12-10	14-10	14-12	16-12	16-14	18-12	18-14 (2) 16	(2) 18 (2) 16	18-14	18-16	20-14	20-16 (2) 18	20-16	20-18	22-16	22-18
Two-Wire Combinations																
10-22[1]	12-22[1]	14-14	18-16	16-22	18-18	18-18	16-16	16-16	22-18	18-22[1]	20-22	18-18	20-18	20-20	18-22[1]	22-20[1]
10-20	12-20	14-16	18-14	16-20	18-20	18-16	16-22[1]	18-18	20-18	18-20	20-20	18-20	20-20	20-22[1]	18-20	22-22
10-18	12-18	14-18	16-16	16-18	16-22[1]	18-14	16-20	16-18[1]	18-18	18-18	20-18	20-20	22-18[1]	22-22	20-20	
10-16	12-16	14-20	14-22[1]	16-16	16-20	18-20	16-18		20-20	20-20	20-16	22-20	22-22		20-22	
10-14	14-16	14-22	14-20	18-18	18-22	18-18			20-16	18-22	18-22[1]	22-20				
12-14	14-14	16-16		18-20		16-22	18-20		22-16[1]		18-18					
	14-12	16-18		18-14		16-20	18-22				18-16					
		16-12		20-14		16-16	20-20				16-22[1]					
		18-12				14-22[1]	20-22									
		20-12		22-14[1]		14-20										
		22-12[1]														

[1] Min./max. wire size combinations

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Receptacles

Product Facts

- **Full line of premier, budget, LIF, moldable and hermetic uninsulated receptacles**
- **Straight, right-angle and receptacle and tab combinations available**
- **Receptacles available in .312, .250, .205, .187, .125 and .110 sizes**
- **Available in 8-30 AWG wire ranges**
- **Receptacles mate with .032 and .020 thick tabs**
- **Available with or without secondary wire support**
- **Base materials brass, phosphor bronze and steel available**
- **Tin, silver and nickel plated products available**
- **Products designed and manufactured to meet UL 310 specifications**
- **Products designed and manufactured to meet CSA C22.2 specifications**



TE offers a full line of uninsulated quick connects. We offer products for a wide variety of applications in almost every market and industry we serve. It is important to choose the correct terminal for each application. The following is a list of application specific characteristics that must be considered when determining the best terminal for each individual application.

Mating Tab
Size (312, 250, 205, 187, 110, etc.)

Wire Type
Magnet or stranded

Wire Orientation
Straight or flag

Temperature/Environment
Base metal plating requirements

Insulator required
Pre-insulated housing required

Agency Approvals
(UL/CSA)

Application
Continuous strip or loose piece

Special Applications
Moldable
Hermetic
Printed circuit board
Piggyback (straight/flag)
Reversible flags
Center strip
Positive locking

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

312 Series Receptacles

Straight Receptacles, Insulation Support

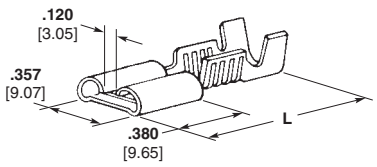

A — Premier Line

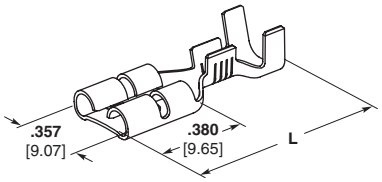

B — Low Insertion Force



Mating 312 Series Tab Dimensions
Dimple (Both Sides)

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	TÜV	Terminal Part Number
18-14	A	**.032** 0.81	**.090-.130** 2.29-3.30	Brass	**.016** 0.41	**.900** 22.86	—	X	X	62092-1
16-12	A	**.032** 0.81	**.110-.210** 2.79-5.33 or (2) **.110** 2.79	Brass, Tin Plated	**.016** 0.41	**.900** 22.86	—	X	X	61399-1
	B	**.032** 0.81	**.110-.210** 2.79-5.33 or (2) **.110** 2.79	Brass, Tin Plated	**.016** 0.41	**.900** 22.86	—	X	X	63677-1
				Brass	**.016** 0.41	**.900** 22.86	—	X	X	63677-2
14-10	A	**.032** 0.81	**.150-.200** 3.81-5.08	Brass, Silver Plated	**.018** 0.46	**.900** 22.86	—	X	X	63820-1

250 Series Receptacles

Straight Receptacles, Insulation Support

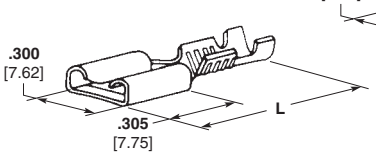

A — Premier Line

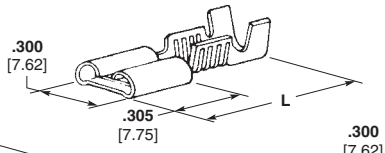

B — Budget Line

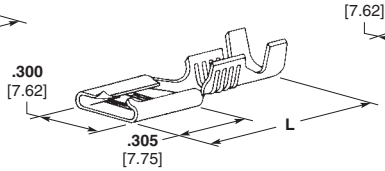

C — Economy Line



D — Moldable Line

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	TÜV	Terminal Part Number
26-22	C	**.032** 0.81	**.040-.060** 1.02-1.52	Brass	**.016** 0.41	**.755** 19.18	X[1]	—	X[1]	61202-1
24-20	A	**.032** 0.81	**.030-.070** 0.76-1.78	Brass, Tin Plated	**.016** 0.41	**.755** 19.18	X[2]	—	X[2]	61368-1
22-18	A	**.032** 0.81	**.060-.100** 1.52-2.54	Brass	**.016** 0.41	**.755** 19.18	X	—	X	42640-1
		.032 0.81	**.060-.100** 1.52-2.54	Brass, Tin Plated	**.016** 0.41	**.755** 19.18	X	—	X	42640-2
		.032 0.81	**.090-.130** 2.29-3.30	Brass	**.016** 0.41	**.755** 19.18	X	—	X	41771
		.032 0.81	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.016** 0.41	**.755** 19.18	X	—	X	41772
	B	**.032** 0.81	**.090-.130** 2.29-3.30	Brass	**.016** 0.41	**.755** 19.18	X	—	X	42510-1
		.032 0.81	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.016** 0.41	**.755** 19.18	X	—	X	42510-2
	C	**.032** 0.81	**.090-.130** 2.29-3.30	Brass	**.016** 0.41	**.755** 19.18	X	—	X	42743-1
		.032 0.81	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.016** 0.41	**.755** 19.18	X	—	X	42743-2
	D	**.032** 0.81	**.090-.130** 2.29-3.30	Brass	**.016** 0.41	**.755** 19.18	—	—	—	63127-1

[1] UL listed and CSA certified for 22 AWG.
[2] UL listed and CSA certified for 22-20 AWG.
[3] Mates with a .020 [0.51] thick tab.
[4] 9,600 CMA max.
[5] UL/CSA - 10 AWG only.
[6] Stress relieved.
[7] Recommended for external use only.
[8] Recommended for internal or external use.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

250 Series Receptacles (Continued)

Straight Receptacles, Insulation Support
(Continued)

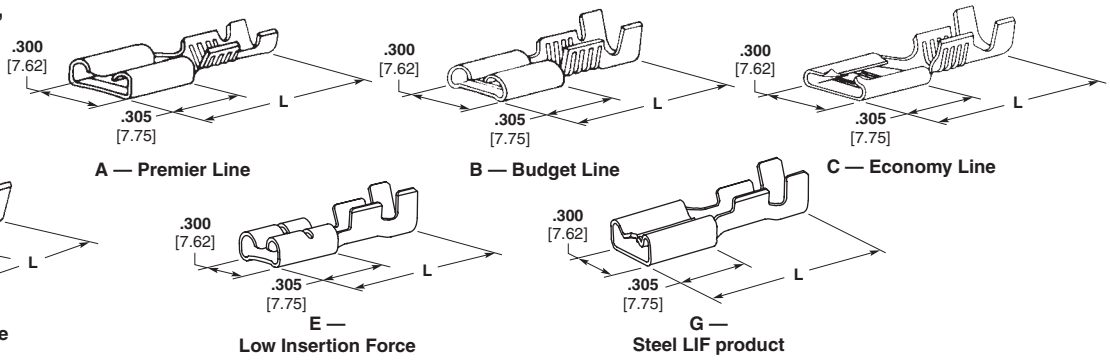

A — Premier Line

B — Budget Line

C — Economy Line

D — Moldable Line

E — Low Insertion Force

G — Steel LIF product

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	cUL	CSA	Terminal Part Number
22-18	E	**.032** 0.81	**.090-.130** 2.29-3.30	Brass	**.016** 0.41	**.755** 19.18	X	—	X	63693-1[6]
		.032 0.81	**.090-.130** 2.29-3.30	Brass	**.016** 0.41	**.755** 19.18	X	—	X	63609-1
		.032 0.81	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.016** 0.41	**.755** 19.18	X	—	X	63609-2
18-14	A	**.020** 0.51	**.120-.170** 3.05-4.32	Brass, Tin Plated	**.018** 0.46	**.755** 19.18	X	—	X	63655-1[3]
		.032 0.81	**.060-.110** 1.52-2.79	Brass, Tin Plated	**.018** 0.46	**.755** 19.18	X	—	X	61375-1
		.032 0.81	**.060-.110** 1.52-2.79	Steel, Nickel Plated	**.016** 0.41	**.755** 19.18	—	—	—	63688-1
		.032 0.81	**.120-.170** 3.05-4.32	Steel, Nickel Plated	**.016** 0.41	**.755** 19.18	—	X	X	42219-1
		.032 0.81	**.120-.170** 3.05-4.32	Brass	**.018** 0.46	**.755** 19.18	X	—	X	41202
		.032 0.81	**.120-.170** 3.05-4.32	Brass, Tin Plated	**.018** 0.46	**.755** 19.18	X	—	X	41274
	B	**.032** 0.81	**.120-.170** 3.05-4.32	Brass	**.016** 0.41	**.750** 19.05	X	—	X	42400-1
		.032 0.81	**.120-.170** 3.05-4.32	Brass, Tin Plated	**.016** 0.41	**.750** 19.05	X	—	X	42400-2
		.032 0.81	**.120-.170** 3.05-4.32	Brass, Silver Plated	**.016** 0.41	**.755** 19.18	X	—	X	61107-1[6]
	C	**.032** 0.81	**.120-.170** 3.05-4.32	Brass	**.016** 0.41	**.755** 19.18	X	—	X	42660-1
		.032 0.81	**.120-.170** 3.05-4.32	Brass, Tin Plated	**.016** 0.41	**.755** 19.18	X	—	X	42660-2
		.032 0.81	**.150-.210** 3.81-5.33	Brass	**.016** 0.41	**.780** 19.81	X	—	X	42692-1
		.032 0.81	**.150-.210** 3.81-5.33	Brass, Tin Plated	**.016** 0.41	**.780** 19.81	X	—	X	42692-2
	D	**.032** 0.81	**.120-.170** 3.05-4.32	Brass	**.016** 0.41	**.750** 19.05	X	—	X	60650-1
		.032 0.81	**.120-.170** 3.05-4.32	Brass, Tin Plated	**.016** 0.41	**.750** 19.05	X	—	X	60650-2
	E	**.020** 0.51	**.120-.170** 3.05-4.32	Brass, Tin Plated	**.018** 0.46	**.775** 19.69	X	—	X	63993-1[3,6]
		.032 0.81	**.120-.170** 3.05-4.32	Brass	**.018** 0.46	**.755** 19.18	X	—	X	63537-1[6]
		.032 0.81	**.120-.170** 3.05-4.32	Brass, Tin Plated	**.018** 0.46	**.755** 19.18	X	—	X	63537-2[6]
		.032 0.81	**.120-.170** 3.05-4.32	Steel, Nickel Plated	**.016** 0.41	**.755** 19.18	—	X	X	63674-1[6]
		.032 0.81	**.120-.170** 3.05-4.32	Brass	**.016** 0.41	**.755** 19.18	X	—	X	63306-1
		.032 0.81	**.120-.170** 3.05-4.32	Brass, Tin Plated	**.016** 0.41	**.755** 19.18	X	—	X	63306-2
	G	**.032** 0.81	**.120-.170** 3.05-4.32	Steel, Nickel Plated	**.016** 0.41	**.755** 19.18	—	X	—	1742198-1

[1] UL listed and CSA certified for 22 AWG.
[2] UL listed and CSA certified for 22-20 AWG.
[3] Mates with a .020 [0.51] thick tab.
[4] 9,600 CMA max.
[5] UL/CSA - 10 AWG only.
[6] Stress relieved.
[7] Recommended for external use only.
[8] Recommended for internal or external use.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

250 Series Receptacles (Continued)

Straight Receptacles, Insulation Support (Continued)



A — Premier Line



B — Budget Line



D — Moldable Line



E — Low Insertion Force

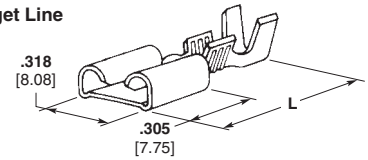

F — Premier Line for Hermetic Tabs

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	SA	Terminal Part Number
18-14	F	**.032** 0.81	**.120-.170** 3.05-4.32	Brass	**.018** 0.46	**.750** 19.05	X	—	X	62500-1[7]
		.032 0.81	**.120-.170** 3.05-4.32	Brass, Tin Plated	**.018** 0.46	**.750** 19.05	X	—	X	62500-2[7]
		.032 0.81	**.120-.170** 3.05-4.32	Phos Brz, Tin Plated	**.018** 0.46	**.750** 19.05	X	—	X	41774[8]
16-12 (2) 16	B	**.032** 0.81	**.160-.210** 4.06-5.33 (2) **.130** 3.30	Brass	**.016** 0.41	**.750** 19.05	X	—	X	63896-1
16-12	A	**.032** 0.81	**.210-.265** 5.33-6.73	Steel, Nickel Plated	**.018** 0.46	**.830** 21.08	—	X	X	42579-1
16-12 (2) 18	A	**.032** 0.81	**.210-.265** 5.33-6.73 (2) **.120** 3.05 Max.	Brass	**.018** 0.46	**.820** 20.93	X	—	X	41727
				Brass, Tin Plated	**.018** 0.46	**.820** 20.93	X	—	X	41728
	E	**.032** 0.81	**.210-.265** 5.33-6.73 (2) **.120** 3.05 Max.	Brass	**.018** 0.46	**.755** 19.18	X	—	X	63757-1
				Steel, Nickel Plated	**.018** 0.46	**.755** 19.18	—	X	X	63757-2
14-10	A	**.032** 0.81	**.150-.200** 3.81-5.08	Brass	**.018** 0.46	**.770** 19.56	X	—	X	41449[4]
		.032 0.81	**.150-.200** 3.81-5.08	Brass, Tin Plated	**.018** 0.46	**.770** 19.56	X	—	X	41450[4]
	B	**.032** 0.81	**.150-.200** 3.81-5.08	Brass, Silver Plated	**.018** 0.46	**.750** 19.05	X	—	X	61095-1[4]
	E	**.032** 0.81	**.150-.200** 3.81-5.08	Brass, Silver Plated	**.018** 0.46	**.755** 19.18	X	—	X	63435-1[4,6]
		.032 0.81	**.150-.200** 3.81-5.08	Brass	**.018** 0.46	**.775** 19.69	X	—	X	63365-1[4]
		.032 0.81	**.150-.200** 3.81-5.08	Brass, Tin Plated	**.018** 0.46	**.775** 19.69	X	—	X	63365-2[4]
	F	**.032** 0.81	**.150-.200** 3.81-5.08	Brass, Tin Plated	**.018** 0.46	**.770** 19.56	X	—	X	42437-2[4,7]
		.032 0.81	**.150-.200** 3.81-5.08	Phos Brz, Tin Plated	**.018** 0.46	**.770** 19.56	X	—	X	42437-5[4,8]
14-10 (2) 14	A	**.032** 0.81	**.225-.275** 5.72-6.99 (2) **.140** 3.56	Brass, Tin Plated	**.018** 0.46	**.775** 19.69	X	—	X	60635-1[4]
				Brass, Silver Plated	**.018** 0.46	**.775** 19.69	X	—	X	60635-2[4]
				Brass	**.018** 0.46	**.775** 19.69	X	—	X	60635-3[4]
	D	**.032** 0.81	**.225-.275** 5.72-6.99 (2) **.140** 3.56	Brass, Tin Plated	**.018** 0.46	**.750** 19.05	—	—	—	63419-1[4,6]
	E	**.032** 0.81	**.225-.275** 5.72-6.99 (2) **.140** 3.56	Brass, Tin Plated	**.018** 0.46	**.755** 19.18	X	—	X	63539-1[4,6]
				Brass	**.018** 0.46	**.755** 19.18	X	—	X	63539-2[4,6]

[1] UL listed and CSA certified for 22 AWG.
[2] UL listed and CSA certified for 22-20 AWG.
[3] Mates with a .020 [0.51] thick tab.
[4] 9,600 CMA max.
[5] UL/CSA - 10 AWG only.
[6] Stress relieved.
[7] Recommended for external use only.
[8] Recommended for internal or external use.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

250 Series Receptacles (Continued)

Straight Receptacles, Insulation Support (Continued)

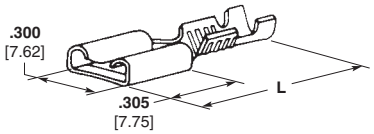

A — Premier Line

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	SA	Terminal Part Number
12-10	A	**.032** 0.81	**.150-.200** 3.81-5.08	Brass, Tin Plated	**.018** 0.46	**.775** 19.69	X	—	X	62428-2
		.032 0.81	**.150-.200** 3.81-5.08	Phos Brz, Tin Plated	**.018** 0.46	**.775** 19.69	X	—	X	62428-3
10-8	A	**.032** 0.81	**.230-.280** 5.84-7.11 or (2) **.160** 4.06	Brass, Tin Plated	**.018** 0.46	**.775** 19.69	X	—	X	62998-2[5]

[1] UL listed and CSA certified for 22 AWG.
[2] UL listed and CSA certified for 22-20 AWG.
[3] Mates with a .020 [0.51] thick tab.
[4] 9,600 CMA max.
[5] UL/CSA - 10 AWG only.
[6] Stress relieved.
[7] Recommended for external use only.
[8] Recommended for internal or external use.

Receptacle and Tab Combinations

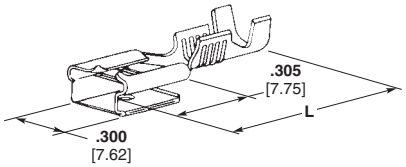

A — Economy Line



B — Economy Line Non-Insulation Support

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	SA	Terminal Part Number
22-18	A	**.032** 0.81	**.060-.100** 1.52-2.79	Brass	**.015** 0.38	**.770** 19.56	X	—	X	61988-1
		.032 0.81	**.060-.100** 1.52-2.79	Brass, Tin Plated	**.015** 0.38	**.770** 19.56	X	—	X	61988-2
		.032 0.81	**.060-.100** 1.52-2.79	Brass, Tin Plated	**.015** 0.38	**.770** 19.56	X	—	X	61988-3[2]
18-14	A	**.032** 0.81	**.120-.170** 3.05-4.32	Brass	**.015** 0.38	**.770** 19.56	X	—	X	61944-1
		.032 0.81	**.120-.170** 3.05-4.32	Brass, Tin Plated	**.015** 0.38	**.770** 19.56	X	—	X	61944-2
		.032 0.81	**.120-.170** 3.05-4.32	Brass	**.032-.016** 0.81-0.41	**.770** 19.56	X	—	X	62109-1[1]
		.032 0.81	**.120-.170** 3.05-4.32	Brass, Tin Plated	**.032-.016** 0.81-0.41	**.770** 19.56	X	—	X	62109-2[1]
		.032 0.81	**.120-.170** 3.05-4.32	Brass	**.015** 0.38	**.770** 19.56	X	—	X	62223-1[2]
		.032 0.81	**.120-.170** 3.05-4.32	Brass, Tin Plated	**.015** 0.38	**.770** 19.56	X	—	X	62223-2[2]
	B	**.032** 0.81	—	Pre-Tin Brass	**.015** 0.38	**.610** 15.49	X	—	X	62276-1
14-10	A	**.032** 0.81	**.150-.200** 3.81-5.08	Brass	**.015** 0.38	**.770** 19.56	X	—	X	62253-1[3]
		.032 0.81	**.150-.200** 3.81-5.08	Brass, Tin Plated	**.015** 0.38	**.770** 19.56	X	—	X	62253-2[3]
		.032 0.81	**.150-.200** 3.81-5.08	Brass, Tin Plated	**.032-.016** 0.81-0.41	**.770** 19.56	X	—	X	1217043-1[1,3]
	B	**.032** 0.81	—	Pre-Tin Brass	**.015** 0.38	**.610** 15.49	X	—	X	62068-1[3]

[1] Dual Thickness.
[2] Stress relieved.
[3] 9600 CMA Max.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

250 Series Receptacles (Continued)

Straight Receptacles, Non-Insulation Support



A — Premier Line

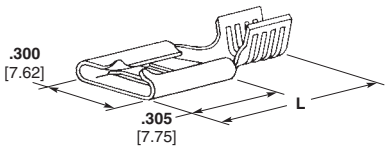

B — Economy Line



C — Moldable Line

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	Terminal Part Number
18-14	A	**.032** 0.81	—	Brass, Tin Plated	**.018** 0.46	**.655** 16.64	X	—	X	41194
		.032 0.81	—	Steel, Nickel Plated	**.018** 0.46	**.655** 16.64	—	X	X	41143-1
	B	**.032** 0.81	—	Brass	**.016** 0.41	**.595** 15.11	X	—	X	42845-1
		.032 0.81	—	Brass, Tin Plated	**.016** 0.41	**.595** 15.11	X	—	X	42845-2
	C	**.032** 0.81	—	Brass	**.016** 0.41	**.655** 16.64	X	—	X	60938-1
		.032 0.81	—	Brass, Tin Plated	**.016** 0.41	**.655** 16.64	X	—	X	60938-2
		.032 0.81	—	Brass, Tin Plated	**.016** 0.41	**.655** 16.64	—	—	—	63981-1[1]

[1] No dimple.

250 Series Tab-Lok Flags

Flag Receptacles, Insulation Support

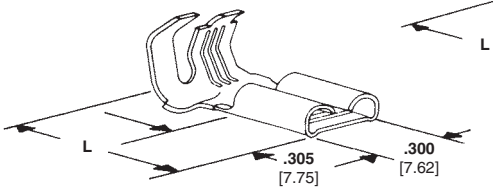

A — Premier Line

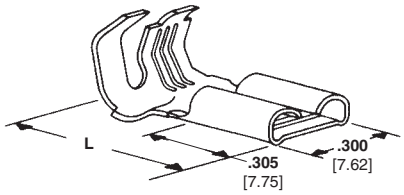

B — Budget Line

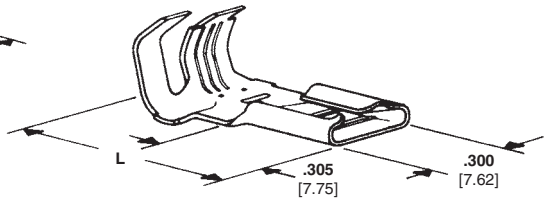

C — Economy Line

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	Terminal Part Number
22-16	C	**.032** 0.81	**.070- .130** 1.78-3.30	Brass	**.016** 0.41	**.670** 17.02	X	—	X	63577-1
18-12	A	**.032** 0.81	**.110-.210** 2.79-5.33	Brass	**.018** 0.46	**.670** 17.02	X	—	X	41531
		.032 0.81	**.110-.210** 2.79-5.33	Brass, Tin Plated	**.018** 0.46	**.670** 17.02	X	—	X	41532
		.032 0.81	**.110-.210** 2.79-5.33	Brass, Silver Plated	**.018** 0.46	**.670** 17.02	X	—	X	61156-1
		.032 0.81	**.110-.210** 2.79-5.33	Steel, Nickel Plated	**.018** 0.46	**.670** 17.02	—	X	X	41531-1
		.032 0.81	**.110-.210** 2.79-5.33	Steel, Nickel Plated	**.016** 0.41	**.670** 17.02	—	X	X	42404-1
	B	**.032** 0.81	**.110-.210** 2.79-5.33	Brass	**.016** 0.41	**.670** 17.02	X	—	X	42511-1
		.032 0.81	**.110-.210** 2.79-5.33	Brass, Tin Plated	**.016** 0.41	**.670** 17.02	X	—	X	42511-2
	C	**.032** 0.81	**.110-.210** 2.79-5.33	Brass	**.016** 0.41	**.670** 17.02	X	—	X	42742-1
		.032 0.81	**.110-.210** 2.79-5.33	Brass, Tin Plated	**.016** 0.41	**.670** 17.02	X	—	X	42742-2

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

250 Series Tab-Lok Flags (Continued)

Flag Receptacles, Insulation Support (Continued)

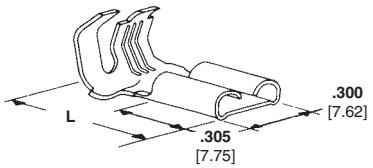

D — Moldable Line

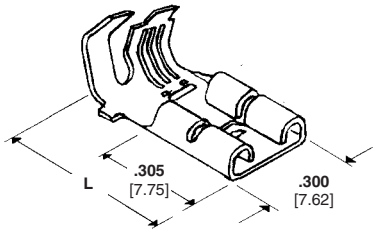

E — Low Insertion Force (LIF)

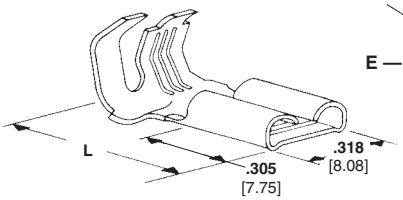

F — Premier Line for Hermetic Tabs



G — Low Insertion Force (LIF)

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	SA	Terminal Part Number
18-12	D	**.032** 0.81	**.110-.210** 2.79-5.33	Brass	**.018** 0.46	**.670** 17.02	X	—	X	60645-1[2]
		.032 0.81	**.110-.210** 2.79-5.33	Brass	**.016** 0.41	**.670** 17.02	X	—	X	60641-1
	E	**.032** 0.81	**.110-.210** 2.79-5.33	Brass	**.016** 0.41	**.670** 17.02	X	—	X	63445-1
		.032 0.81	**.110-.210** 2.79-5.33	Brass, Tin Plated	**.016** 0.41	**.670** 17.02	X	—	X	63445-2
		.032 0.81	**.110-.210** 2.79-5.33	Brass, Tin Plated	**.016** 0.41	**.670** 17.02	X	—	X	63445-4[2]
		.032 0.81	**.110-.210** 2.79-5.33	Steel, Nickel Plated	**.016** 0.41	**.670** 17.02	—	X[1]	X[1]	63604-1[2]
		.032 0.81	**.110-.210** 2.79-5.33	Brass	**.018** 0.46	**.670** 17.02	X	—	X	63555-1[2]
		.032 0.81	**.110-.210** 2.79-5.33	Brass, Tin Plated	**.018** 0.46	**.670** 17.02	X	—	X	63555-2[2]
	F	**.032** 0.81	**.110-.210** 2.79-5.33	Phos Bronze, Tin Plated	**.018** 0.46	**.670** 17.02	X	—	X	41800[4]
		.032 0.81	**.110-.210** 2.79-5.33	Brass	**.018** 0.46	**.670** 17.02	X	—	X	41801[3]
		.032 0.81	**.110-.210** 2.79-5.33	Brass, Tin Plated	**.018** 0.46	**.670** 17.02	X	—	X	41802[3]
		.032 0.81	**.110-.210** 2.79-5.33	Phos Bronze, Silver Plated	**.018** 0.46	**.670** 17.02	X	—	X	42041[4]
		.032 0.81	**.110-.210** 2.79-5.33	Phos Bronze, Tin Plated	**.018** 0.46	**.670** 17.02	X	—	X	60274-2[4,5]
		.032 0.81	**.110-.210** 2.79-5.33	Phos Bronze, Tin Plated	**.018** 0.46	**.670** 17.02	X	—	X	63651-1[4,6]
	G	**.032** 0.81	**.110-.210** 2.79-5.33	Steel, Nickel Plated	**.016** 0.41	**.670** 17.02	—	X	—	1742543-1[7]
12-10	F	**.032** 0.81	**.110-.210** 2.79-5.33	Brass, Tin Plated	**.018** 0.46	**.670** 17.02	X	—	X	60851-1[3]
		.032 0.81	**.110-.210** 2.79-5.33	Brass, Silver Plated	**.018** 0.46	**.670** 17.02	X	—	X	60851-2[3]
		.032 0.81	**.110-.210** 2.79-5.33	Brass	**.018** 0.46	**.670** 17.02	X	—	X	60851-4[3]
		.032 0.81	**.110-.210** 2.79-5.33	Phos Bronze, Silver Plated	**.018** 0.46	**.670** 17.02	X	—	X	42563-6[4]
		.032 0.81	**.110-.210** 2.79-5.33	Steel, Nickel Plated	**.018** 0.46	**.670** 17.02	—	—	—	42563-9
		.032 0.81	**.110-.210** 2.79-5.33	Phos Bronze, Tin Plated	**.018** 0.46	**.670** 17.02	X	—	X	42563-8[4]
		.032 0.81	**.110-.265** 2.79-6.73	Brass	**.018** 0.46	**.670** 17.02	X	—	X	63617-1[6]

[1] 18 AWG only.
[2] Stress relieved.
[3] Recommended for external use only.
[4] For internal or external use.
[5] Left handed flag.
[6] Non-stress relieved.
[7] UL Recognized 14-18 AWG.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

250 Series Tab-Lok Flags (Continued)

Flag Receptacles, Non-Insulation Support



A — Economy Line



B — Premier Line for Hermetic Tabs

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	Terminal Part Number
18-12	A	**.032** 0.81	—	Brass, Pre-Tin Plated	**.016** 0.41	**.600** 15.24	X	—	X	61177-2[3]
		.032 0.81	—	Brass, Pre-Tin Plated	**.016** 0.41	**.600** 15.24	X	—	X	61177-3[4]
		.032 0.81	—	Brass	**.016** 0.41	**.600** 15.24	X	—	X	62091-1[5]
		.032 0.81	—	Brass, Pre-Tin Plated	**.016** 0.41	**.600** 15.24	X	—	X	62091-2[5]
	B	**.032** 0.81	—	Brass, Tin Plated	**.018** 0.46	**.610** 15.49	X	—	X	62021-3[5]
		.032 0.81	—	Pho. Brz, Silver Plated	**.018** 0.46	**.670** 17.02	X	—	X	62056-1[1,3]
		.032 0.81	—	Pho. Brz, Silver Plated	**.018** 0.46	**.670** 17.02	X	—	X	62056-2[1,2,4]
		.032 0.81	—	Pho. Brz, Tin Plated	**.018** 0.46	**.670** 17.02	X	—	X	62056-6[2,3]
		.032 0.81	—	Pho. Brz, Tin Plated	**.018** 0.46	**.670** 17.02	X	—	X	62056-7[1,2,4]
		.032 0.81	—	Brass, Tin Plated	**.018** 0.46	**.670** 17.02	X	—	X	62056-3[2,3]
		.032 0.81	—	Brass, Tin Plated	**.018** 0.46	**.670** 17.02	X	—	X	62056-4[4]
12-10 or (2) 14	A	**.032** 0.81	—	Brass	**.016** 0.41	**.670** 17.02	X	—	X	62011-1[5]
		.032 0.81	—	Brass, Pre-Tin Plated	**.016** 0.41	**.670** 17.02	X	—	X	62011-2[5]
12-10	B	**.032** 0.81	—	Pho. Brz, Silver Plated	**.018** 0.46	**.670** 17.02	X	—	X	62057-1[1,3]
		.032 0.81	—	Brass, Tin Plated	**.018** 0.46	**.670** 17.02	X	—	X	62057-3[3]
		.032 0.81	—	Brass, Tin Plated	**.018** 0.46	**.670** 17.02	X	—	X	62057-4[4]
		.032 0.81	—	Pho. Brz, Silver Plated	**.018** 0.46	**.670** 17.02	X	—	X	62057-7[4]
		.032 0.81	—	Pho. Brz, Silver Plated	**.018** 0.46	**.670** 17.02	X	—	X	62022-1[5]
		.032 0.81	—	Brass, Tin Plated	**.018** 0.46	**.670** 17.02	X	—	X	62022-2[5]

[1] For internal or external use.
[2] Reverse reel.
[3] Right handed flag.
[4] Left handed flag.
[5] Right or left handed. Carrier out front for through splicing.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

250 Series F-Crimp Flags

Flag Receptacles



A — Premier Line, Insulation Support (Right Hand)



B — Premier Line, Insulation Support (Left Hand)



C — Economy Line, Insulation Support (Left Hand)



D — Budget Line, Insulation Support (Right Hand)



E — Budget Line, Insulation Support (Left Hand)

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	Terminal Part Number
22-18	B	**.032** 0.81	**.060 -.110** 1.52-2.79	Brass	**.016** 0.41	**.540** 13.72	X	—	X	62813-1
		.032 0.81	**.060 -.110** 1.52-2.79	Brass, Tin Plated	**.016** 0.41	**.540** 13.72	X	—	X	62813-2
	A	**.032** 0.81	**.060 -.110** 1.52-2.79	Brass	**.016** 0.41	**.540** 13.72	X	—	X	62814-1
		.032 0.81	**.060 -.110** 1.52-2.79	Brass, Tin Plated	**.016** 0.41	**.540** 13.72	X	—	X	62814-2
	D	**.032** 0.81	**.060 -.110** 1.52-2.79	Brass	**.016** 0.41	**.540** 13.72	X	—	X	62718-1
		.032 0.81	**.060 -.110** 1.52-2.79	Brass, Tin Plated	**.016** 0.41	**.540** 13.72	X	—	X	62718-2
18-14 or (2)18	B	**.032** 0.81	**.110-.200** 2.79-5.08	Brass	**.016** 0.41	**.540** 13.72	X	—	X	63538-1[1]
		.032 0.81	**.110-.200** 2.79-5.08	Steel, Nickel Plated	**.016** 0.41	**.540** 13.72	—	X	—	63963-1
18-14	A	**.032** 0.81	**.110-.160** 2.79-4.06	Brass, Tin Plated	**.016** 0.41	**.540** 13.72	X	—	X	63901-1[1]
		.032 0.81	**.110-.160** 2.79-4.06	Brass	**.016** 0.41	**.540** 13.72	X	—	X	63901-2[1]
	B	**.032** 0.81	**.110 -.160** 2.79-4.06	Brass	**.016** 0.41	**.540** 13.72	X	—	X	63011-1
		.032 0.81	**.110 -.160** 2.79-4.06	Brass, Tin Plated	**.016** 0.41	**.540** 13.72	X	—	X	63011-2
	A	**.032** 0.81	**.110 -.160** 2.79-4.06	Brass	**.016** 0.41	**.540** 13.72	X	—	X	63012-1
		.032 0.81	**.110 -.160** 2.79-4.06	Brass, Tin Plated	**.016** 0.41	**.540** 13.72	X	—	X	63012-2
	E	**.032** 0.81	**.110 -.160** 2.79-4.06	Brass	**.016** 0.41	**.540** 13.72	X	—	X	63009-1
		.032 0.81	**.110 -.160** 2.79-4.06	Brass, Tin Plated	**.016** 0.41	**.540** 13.72	X	—	X	63009-2
	D	**.032** 0.81	**.110 -.160** 2.79-4.06	Brass	**.016** 0.41	**.540** 13.72	X	—	X	63010-1
		.032 0.81	**.110 -.160** 2.79-4.06	Brass, Tin Plated	**.016** 0.41	**.540** 13.72	X	—	X	63010-2
	C	**.032** 0.81	—	Brass	**.016** 0.41	**.430** 10.92	X	—	X	63508-1[2]
		.032 0.81	**.110 -.160** 2.79-4.06	Brass	**.016** 0.41	**.540** 13.72	X	—	X	63096-1
		.032 0.81	**.110 -.160** 2.79-4.06	Brass, Tin Plated	**.016** 0.41	**.540** 13.72	X	—	X	63096-2
16-12	A	**.032** 0.81	**.120 -.170** 3.05-4.32	Brass, Tin Plated	**.018** 0.45	**.700** 17.78	X	—	X	1742718-1

[1] Low Insertion Force.
[2] No insulation support.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

250 Series F-Crimp Flags (Continued)

Flag Receptacles (Continued)



A — Center Strip, F-Crimp

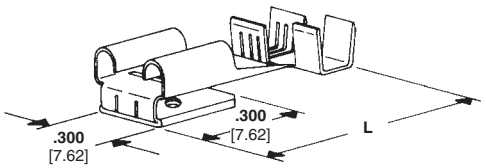

B — Receptacle Tab Combination, F-Crimp



C — Reversible Flag, Straight End Feed



D — Reversible Flag for Hermetic Tabs, Side Feed



E — Reversible Flag for Hermetic Tabs, Side Feed

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	Terminal Part Number
20-16	D	**.032** 0.81	**.085-.150** 2.16-3.81	Phos Brz, Tin Plated	**.018** 0.46	**.640** 16.26	X	X	63137-1
18-14	A	**.032** 0.81	—	Brass	**.016** 0.41	**.430** 10.92	X	X	63315-1[3]
		.032 0.81	—	Brass, Tin Plated	**.016** 0.41	**.430** 10.92	X	X	63315-2[3]
		.032 0.81	**.110-.160** 2.79-4.06	Brass	**.016** 0.41	**.540** 13.72	X	X	63314-1
		.032 0.81	**.110-.160** 2.79-4.06	Brass, Tin Plated	**.016** 0.41	**.540** 13.72	X	X	63314-2
	B	**.032** 0.81	**.120-.170** 3.05-4.32	Brass, Tin Plated	**.016** 0.41	**.630** 16.00	X	X	151321-4
	C	**.032** 0.81	**.090-.130** 2.29-3.30	Brass	**.016** 0.41	**.710** 18.03	X	X	62048-1
		.032 0.81	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.016** 0.41	**.710** 18.03	X	X	62048-2
		.032 0.81	**.170-.220** 4.32-5.59	Brass, Tin Plated	**.016** 0.41	**.710** 18.03	X	X	60764-2
	E	**.032** 0.81	—	Brass	**.018** 0.46	**.640** 16.26	—	—	63647-1[1,3]
		.032 0.81	—	Phos Brz, Tin Plated	**.018** 0.46	**.640** 16.26	—	—	63647-2[1,3]
		.032 0.81	—	Brass, Tin Plated	**.018** 0.46	**.640** 16.26	—	—	63647-3[1,3]
16-12	D	**.032** 0.81	**.130-.170** 3.30-4.32	Phos Brz, Tin Plated	**.018** 0.46	**.640** 16.26	X	X	61188-1[2]
12-10	D	**.032** 0.81	**.130-.170** 3.30-4.32	Phos Brz, Tin Plated	**.018** 0.46	**.640** 16.26	X	X	61187-1[2]

[1] No Dimple.
[2] Bends terminal 90°. For 180° bend use applicator 687616-2 with Press 694234-7.
[3] No insulation support.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

205 Series Receptacles

Straight Receptacles



A — Premier Line, Insulation Support



B — Economy Line, Insulation Support



C — Premier line Non-Insulation Support



D — Economy Line, Non-Insulation Support

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	TÜV	Terminal Part Number
26-22	A	**.020** 0.51	**.050-.070** 1.27-1.78	Brass, Tin Plated	**.012** 0.31	**.620** 15.75	X	—	X	60674-1[1]
22-18	A	**.020** 0.51	**.085-.125** 2.16-3.18	Brass	**.012** 0.31	**.615** 15.62	X	—	X	42198-1
		.020 0.51	**.085-.125** 2.16-3.18	Brass, Tin Plated	**.012** 0.31	**.615** 15.62	X	—	X	42198-2
		.032 0.81	**.085-.125** 2.16-3.18	Brass, Tin Plated	**.012** 0.31	**.615** 15.62	X	—	X	42299-2
	B	**.020** 0.51	**.085-.125** 2.16-3.18	Brass	**.012** 0.31	**.615** 15.62	X	—	X	42710-1
		.020 0.51	**.085-.125** 2.16-3.18	Brass, Tin Plated	**.012** 0.31	**.615** 15.62	X	—	X	42710-2
		.032 0.81	**.085-.125** 2.16-3.18	Brass, Tin Plated	**.012** 0.31	**.615** 15.62	X	—	X	60904-2
	C	**.020** 0.51	—	Brass, Tin Plated	**.012** 0.31	**.470** 11.94	X	—	X	42197-2[2]
18-14	A	**.032** 0.81	**.130-.180** 3.30-4.57	Brass, Tin Plated	**.016** 0.41	**.615** 15.62	X	—	X	42233-2
		.032 0.81	**.130-.180** 3.30-4.57	Phos Brz, Tin Plated	**.016** 0.41	**.615** 15.62	X	—	X	42233-7
	B	**.020** 0.51	**.130-.180** 3.30-4.57	Brass, Tin Plated	**.012** 0.31	**.615** 15.62	X	—	X	42713-2
		.020 0.51	**.130-.180** 3.30-4.57	Brass, Tin Plated	**.016** 0.41	**.615** 15.62	X	—	X	42781-2
	C	**.032** 0.81	—	Phos Brz, Tin Plated	**.016** 0.41	**.470** 11.94	X	—	X	42239-4
	D	**.020** 0.51	—	Brass, Tin Plated	**.012** 0.31	**.470** 11.94	X	—	X	42712-2[2]

[1] UL listed and CSA certified for 22 AWG.
[2] Moldable.

Flag Receptacles



E — Premier Line, Tab-Lok Flag



F — Economy Line, Tab-Lok Flag

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	TÜV	Terminal Part Number
20-16	E	**.020** 0.51	**.110-.170** 2.79-4.32	Brass	**.012** 0.31	**.530** 13.46	X	—	X	42199-1
		.020 0.51	**.110-.170** 2.79-4.32	Brass, Tin Plated	**.012** 0.31	**.530** 13.46	X	—	X	42199-2
20-14	E	**.020** 0.51	**.110-.170** 2.79-4.32	Brass, Tin Plated	**.016** 0.41	**.530** 13.46	X	—	X	62354-1
		.032 0.81	**.110-.170** 2.79-4.32	Brass, Tin Plated	**.016** 0.41	**.530** 13.46	X	—	X	42234-2
	F	**.032** 0.81	**.110-.170** 2.79-4.32	Brass	**.016** 0.41	**.530** 13.46	X	—	X	60195-1[1]
		.032 0.81	**.110-.170** 2.79-4.32	Brass, Tin Plated	**.016** 0.41	**.530** 13.46	X	—	X	60195-2[1]

[1] Moldable.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

187 Series Receptacles

Straight Receptacles

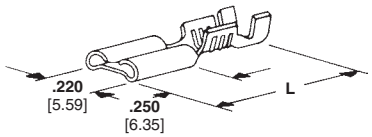

A — Premier Line



B — Budget Line

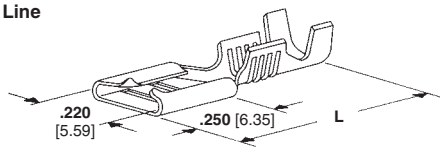

C — Economy Line

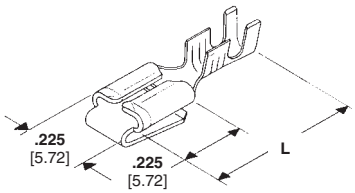

F — Commercial Line
Receptacle & Tab Combination

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)				Terminal Part Number
24-20	A	**.020** 0.51	**.040-.070** 1.02-1.78	Brass, Tin Plated	**.012** 0.31	**.590** 14.99				60573-1
		.020 0.51	**.040-.070** 1.02-1.78	Brass	**.012** 0.31	**.590** 14.99	X[2]	—	X[2]	60573-2
		.020 0.51	**.040-.070** 1.02-1.78	Phos Brz, Tin Plated	**.012** 0.31	**.590** 14.99	X	—	X	62187-2
		.020 0.51	**.060-.110** 1.52-2.79	Brass, Tin Plated	**.012** 0.31	**.585** 14.86	X[2]	—	X[2]	62138-1
		.020 0.51	**.060-.110** 1.52-2.79	Brass	**.012** 0.31	**.585** 14.86	X[2]	—	X[2]	62138-2
		.021 0.53	**.060-.110** 1.52-2.79	Brass, Tin Plated	**.012** 0.31	**.590** 14.99	—	—	—	1217129-1
		.032 0.81	**.040-.070** 1.02-1.78	Brass, Tin Plated	**.012** 0.31	**.590** 14.99	X[2]	—	X[2]	62181-1
22-18	B	**.032** 0.81	**.090-.150** 2.29-3.81	Brass, Tin Plated	**.012** 0.31	**.585** 14.86	X	—	X	63931-1
	C	**.020** 0.51	**.090-.130** 2.29-3.30	Brass	**.012** 0.31	**.590** 14.99	X	—	X	63347-1
	F	**.020** 0.51	**.060-.100** 1.52-2.54	Brass, Tin Plated	**.014** 0.36	**.615** 15.62	X	—	X	63873-1[5]
		.020 0.51	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.014** 0.36	**.615** 15.62	X	—	X	1217084-1[5]
20-16	A	**.015** 0.38	—	Brass, Tin Plated	**.012** 0.31	**.470** 11.94	—	—	—	42374-2[1]
		.015 0.38	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.012** 0.31	**.590** 14.99	—	—	—	42453-2
		.020 0.51	—	Brass, Tin Plated	**.012** 0.31	**.470** 11.94	X	—	X	42373-2[1]
		.020 0.51	—	Steel, Nickel Plated	**.012** 0.31	**.470** 11.94	—	X	—	42373-3[1]
		.020 0.51	**.060-.110** 1.52-2.79	Brass	**.012** 0.31	**.585** 14.86	X	—	X	62137-1
		.020 0.51	**.060-.110** 1.52-2.79	Brass, Tin Plated	**.012** 0.31	**.585** 14.86	X	—	X	62137-2
		.020 0.51	**.090-.130** 2.29-3.30	Brass	**.012** 0.31	**.590** 14.99	X	—	X	42452-1
		.020 0.51	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.012** 0.31	**.590** 14.99	X	—	X	42452-2
		.020 0.51	**.090-.130** 2.29-3.30	Phos Brz, Tin Plated	**.012** 0.31	**.590** 14.99	X	—	X	42452-5
		.020 0.51	**.090-.130** 2.29-3.30	Steel, Nickel Plated	**.012** 0.31	**.590** 14.99	—	X	X	60621-1
		.032 0.81	**.090-.130** 2.29-3.30	Steel, Nickel Plated	**.012** 0.31	**.590** 14.99	—	X	X	63850-1
		.032 0.81	**.090-.130** 2.29-3.30	Brass	**.012** 0.31	**.585** 14.86	X	—	X	61758-1
		.032 0.81	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.012** 0.31	**.585** 14.86	X	—	X	61758-2

[1] No Insulation support.
[2] UL listed and CSA certified for 22- 20 AWG.
[3] Also capable of accepting (2) 20 AWG wires.
[4] Stress relieved.
[5] Tab stock thickness .020 [0.51].

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

187 Series Receptacles (Continued)

Straight Receptacles (Continued)



B — Budget Line

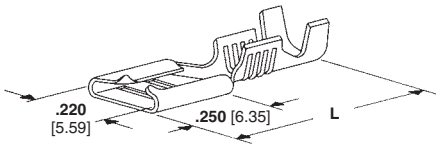

C — Economy Line



E — Moldable Line

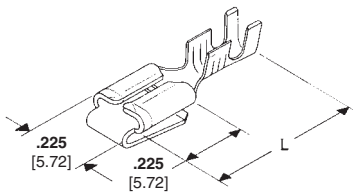

F — Commercial Line
Receptacle & Tab Combination

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	SP	Terminal Part Number
20-16	B	**.020** 0.51	**.090-.130** 2.29-3.30	Brass	**.012** 0.31	**.585** 14.86	X	—	X	42617-1
		.020 0.51	**.090-.130** 2.29-3.30	Steel, Nickel Plated	**.012** 0.31	**.585** 14.86	—	X	X	63959-1
		.020 0.51	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.012** 0.31	**.585** 14.86	X	—	X	42617-2
		.032 0.81	—	Brass	**.012** 0.31	**.475** 12.07	X	—	X	63785-1[1]
		.032 0.81	**.090-.130** 2.29-3.30	Brass	**.012** 0.31	**.585** 14.86	X	—	X	63477-1
		.032 0.81	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.012** 0.31	**.585** 14.86	X	—	X	63477-2
	C	**.020** 0.51	—	Brass	**.012** 0.31	**.475** 12.07	X	—	X	42799-1[1]
		.020 0.51	—	Brass, Tin Plated	**.012** 0.31	**.475** 12.07	X	—	X	42799-2[1]
		.020 0.51	**.090-.130** 2.29-3.30	Brass	**.012** 0.31	**.590** 14.99	X	—	X	42801-1
		.020 0.51	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.012** 0.31	**.590** 14.99	X	—	X	42801-2
		.020 0.51	**.090-.130** 2.29-3.30 or (2) **.090** 2.29	Brass	**.012** 0.31	**.590** 14.99	X	—	X	61892-1[3]
		.032 0.81	—	Brass, Tin Plated	**.012** 0.31	**.475** 12.07	X	—	X	61969-1[1]
		.032 0.81	**.090-.130** 2.29-3.30	Brass	**.012** 0.31	**.590** 14.99	X	—	X	60196-1
		.032 0.81	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.012** 0.31	**.590** 14.99	X	—	X	60196-2
		.039 0.99	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.012** 0.31	**.590** 14.99	—	—	—	63751-1
	E	**.020** 0.51	**.090-.130** 2.29-3.30	Brass	**.012** 0.31	**.585** 14.86	X	—	X	60214-1
		.020 0.51	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.012** 0.31	**.585** 14.86	X	—	X	60214-2
	F	**.020** 0.51	**.060-.110** 1.52-2.79	Brass, Tin Plated	**.014** 0.36	**.615** 15.62	X	—	X	62139-1[5]
		.020 0.51	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.014** 0.36	**.615** 15.62	X	—	X	62026-1[5]
		.020 0.51	**.090-.130** 2.29-3.30	Brass	**.014** 0.36	**.615** 15.62	X	—	X	62026-2[5]
		.032 0.81	**.090-.130** 2.29-3.30	Brass	**.014** 0.36	**.615** 15.62	X	—	X	63646-1[5]
		.032 0.81	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.014** 0.36	**.615** 15.62	X	—	X	63646-2[5]

[1] No Insulation support.
[2] UL listed and CSA certified for 22- 20 AWG.
[3] Also capable of accepting (2) 20 AWG wires.
[4] Stress relieved.
[5] Tab stock thickness .020 [0.51].

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

187 Series Receptacles (Continued)

Straight Receptacles (Continued)



A — Premier Line



B — Budget Line



D — Commercial Line

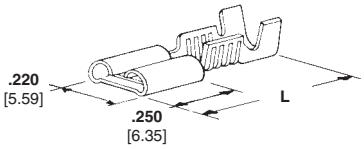

E — Moldable Line

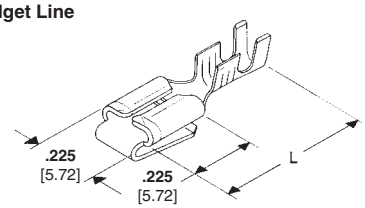

F — Commercial Line
Receptacle & Tab Combination

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	SEV	Terminal Part Number
18-16 or (2) 18	A	.020 0.51	.105-.210 2.67-5.33 or (2) .105 2.67 Max.	Brass, Tin Plated	.012 0.31	.590 14.99	X	—	X	60487-2
			.105-.210 2.67-5.33 or (2) .105 2.67 Max.	Brass	.012 0.31	.590 14.99	X	—	X	60487-1
		.032 0.81	.105-.210 2.67-5.33 or (2) .105 2.67 Max.	Brass, Tin Plated	.012 0.31	.590 14.99	X	—	X	61945-1
			.105-.210 2.67-5.33 or (2) .105 2.67 Max.	Steel, Nickel Plated	.012 0.31	.590 14.99	—	X	X	61945-2
	B	.032 0.81	.105-.210 2.67-5.33 or (2) .105 2.67 Max.	Brass	.012 0.31	.590 14.99	X	—	X	63769-1
	E	.020 0.51	.105-.210 2.67-5.33 or (2) .105 2.67 Max.	Brass	.012 0.31	.590 14.99	X	—	X	63470-1
18-14 or (2) 16	D	.020 0.51	.180-.230 4.57-5.84 or (2) .110 2.79 Max.	Brass	.014 0.36	.640 16.26	X	—	X	60742-1
				Brass, Tin Plated	.014 0.36	.640 16.26	X	—	X	60742-2
				Brass, Tin Plated	.014 0.36	.640 16.26	X	—	X	63749-2[4]
		.025 0.64	.180-.230 4.57-5.84 or (2) .110 2.79 Max.	Brass	.014 0.36	.640 16.26	—	—	—	63832-1
		.032 0.81	.180-.230 4.57-5.84 or (2) .110 2.79 Max.	Brass	.014 0.36	.640 16.26	X	—	X	63596-1
				Brass, Pre-Tin	.014 0.36	.640 16.26	X	—	X	63596-2
18-14	A	.020 0.51	.110-.160 2.79-4.06	Brass, Tin Plated	.012 0.31	.590 14.99	X	—	X	1217149-1
	D	.020 0.51	.150-.190 3.81-4.83	Brass	.014 0.36	.640 16.26	X	—	X	62016-1
			.150-.190 3.81-4.83	Brass, Tin Plated	.014 0.36	.640 16.26	X	—	X	62016-2
		.032 0.81	.150-.190 3.81-4.83	Brass, Pre-Tin	.014 0.36	.640 16.26	X	—	X	63697-1
	F	.020 0.51	.110-.160 2.79-4.06	Brass, Tin Plated	.014 0.36	.615 15.62	—	—	—	1217151-1[5]

[1] No Insulation support.
[2] UL listed and CSA certified for 22- 20 AWG.
[3] Also capable of accepting (2) 20 AWG wires.
[4] Stress relieved.
[5] Tab stock thickness .020 [0.51].

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

187 Series Tab-Lok Flags

Flag Receptacles, Insulation Support

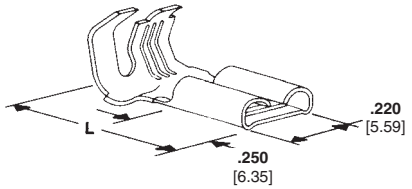

A — Premier Line

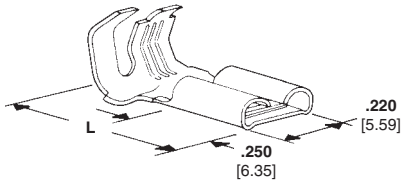

B — Budget Line

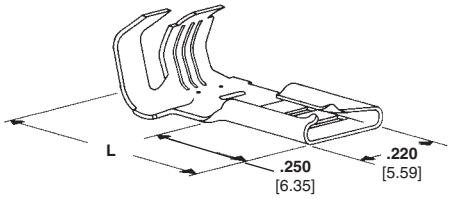

C — Economy Line

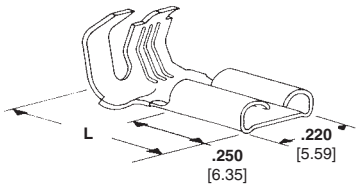

D — Moldable Line

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	Terminal Part Number
20-16	A	**.020** 0.51	**.110-.170** 2.79-4.32	Brass	**.012** 0.31	**.530** 13.46	X	—	X	42486-1
		.020 0.51	**.110-.170** 2.79-4.32	Brass, Tin Plated	**.012** 0.31	**.530** 13.46	X	—	X	42486-2
		.020 0.51	**.110-.170** 2.79-4.32	Steel, Nickel Plated	**.012** 0.31	**.530** 13.46	—	X	X	42486-3
		.020 0.51	**.110-.170** 2.79-4.32	Brass, Silver Plated	**.012** 0.31	**.530** 13.46	X	—	X	42486-4
		.032 0.81	**.110-.170** 2.79-4.32	Brass, Tin Plated	**.012** 0.31	**.530** 13.46	X	—	X	62591-1
		.032 0.81	**.110-.170** 2.79-4.32	Steel, Nickel Plated	**.012** 0.31	**.530** 13.46	—	X	X	63696-1
	B	**.020** 0.51	**.110-.170** 2.79-4.32	Brass	**.012** 0.31	**.530** 13.46	X	—	X	42618-1
		.020 0.51	**.110-.170** 2.79-4.32	Brass, Tin Plated	**.012** 0.31	**.530** 13.46	X	—	X	42618-2
		.020 0.51	**.170-.225** 4.32-5.72	Brass	**.012** 0.31	**.575** 14.61	X	—	X	62817-1
		.032 0.81	**.110-.170** 2.79-4.32	Brass	**.012** 0.31	**.530** 13.46	X	—	X	63748-1
	C	**.020** 0.51	**.110-.170** 2.79-4.32	Brass	**.012** 0.31	**.530** 13.46	X	—	X	42800-1
		.020 0.51	**.110-.170** 2.79-4.32	Brass, Tin Plated	**.012** 0.31	**.530** 13.46	X	—	X	42800-2
		.032 0.81	**.110-.170** 2.79-4.32	Brass	**.012** 0.31	**.530** 13.46	X	—	X	60529-1
		.032 0.81	**.110-.170** 2.79-4.32	Brass, Tin Plated	**.012** 0.31	**.530** 13.46	X	—	X	60529-2
	D	**.020** 0.51	**.110-.170** 2.79-4.32	Brass	**.012** 0.31	**.530** 13.46	X	—	X	61029-1
		.020 0.51	**.110-.170** 2.79-4.32	Brass, Tin Plated	**.012** 0.31	**.530** 13.46	X	—	X	61029-2
18-14 or (2) 18	A	**.032** 0.81	**.110-.190** 2.79-4.83 (2) **.105** 2.67 Max.	Brass, Tin Plated	**.014** 0.36	**.530** 14.36	X	—	X	1742422-1
	B	**.032** 0.81	**.110-.190** 2.79-4.83 (2) **.105** 2.67 Max.	Brass, Tin Plated	**.014** 0.36	**.530** 14.36	X	—	X	1217027-1

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

187 Series C-Crimp Flag Receptacles

C-Crimp Line



A — 187 Series C-Crimp Flag Receptacles

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	SA	Terminal Part Number
20-16	A	**.020** 0.51	**.090-.130** 2.29-3.30	Brass	**.014** 0.36	**.522** 13.26	X	—	X	1217009-1
		.020 0.51	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.014** 0.36	**.522** 13.26	X	—	X	1217009-2
		.032 0.81	**.090-.130** 2.29-3.30	Brass	**.014** 0.36	**.522** 13.26	X	—	X	1217010-1
		.032 0.81	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.014** 0.36	**.522** 13.26	X	—	X	1217010-2
18-14	A	**.032** 0.81	**.100-.155** 2.54-3.94	Brass	**.016** 0.41	**.535** 13.59	X[1]	—	X[1]	1217244-1
		.032 0.81	**.100-.155** 2.54-3.94	Brass, Tin Plated	**.016** 0.41	**.535** 13.59	X	—	X	1217244-2

[1] 16 & 18 AWG only.

187 Series F-Crimp Flags

F-Crimp Line



A — End of Wire with Insulation Support



B — Center Strip with Insulation Support



C — Center Strip with No Insulation Support

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	SA	Terminal Part Number
22-18	A	**.020** 0.51	**.060-.110** 1.52-2.79	Brass	**0.012** 0.31	**0.445** 11.30	X	—	X	1742086-1
		.020 0.51	**.060-.110** 1.52-2.79	Brass, Tin Plated	**0.012** 0.31	**0.445** 11.30	X	—	X	1742086-2
		.032 0.81	**.060-.110** 1.52-2.79	Brass	**0.012** 0.31	**0.445** 11.30	X	—	X	1742087-1
		.032 0.81	**.060-.110** 1.52-2.79	Brass, Tin Plated	**0.012** 0.31	**0.445** 11.30	X	—	X	1742087-2
20-16	B	**.020** 0.51	**.090-.130** 2.29-3.30	Brass	**.012** 0.31	**.596** 15.14	—	—	—	626412-1
18-14	B	**.020** 0.51	**.060-.150** 1.52-3.81	Brass	**.016** 0.41	**.430** 10.92	X	—	X	63512-1
		.032 0.81	**.060-.150** 1.52-3.81	Brass	**.016** 0.41	**.430** 10.92	X	—	X	63316-1
		.032 0.81	**.060-.150** 1.52-3.81	Brass, Tin Plated	**.016** 0.41	**.430** 10.92	X	—	X	63316-2
		.032 0.81	**.060-.150** 1.52-3.81	Steel, Nickel Plated	**.016** 0.41	**.430** 10.92	—	X	X	63316-3
	C	**.032** 0.81	—	Brass	**.016** 0.41	**.430** 10.92	X	—	X	63317-1
18-14 or (2) 18	A	**.020** 0.51	**.110-.150 or 2-.110** 2.79-3.81 or 2-2.79 max	Brass	**0.012** 0.31	**0.445** 11.30	X[1]	—	X[1]	1742088-1
		.020 0.51	**.110-.150 or 2-.110** 2.79-3.81 or 2-2.79 max	Brass, Tin Plated	**0.012** 0.31	**0.445** 11.30	X[1]	—	X[1]	1742088-2
		.032 0.81	**.110-.150 or 2-.110** 2.79-3.81 or 2-2.79 max	Brass	**0.012** 0.31	**0.445** 11.30	X[1]	—	X[1]	1742089-1
		.032 0.81	**.110-.150 or 2-.110** 2.79-3.81 or 2-2.79 max	Brass, Tin Plated	**0.012** 0.31	**0.445** 11.30	X[1]	—	X[1]	1742089-2
18 or (2) 18	A	**.020** 0.51	**.110-.150 or 2-.110** 2.79-3.81 or 2-2.79 max	Steel, Nickel Plated	**0.012** 0.31	**0.445** 11.30	—	X[1]	—	1742312-1
		.032 0.81	**.110-.150 or 2-.110** 2.79-3.81 or 2-2.79 max	Steel, Nickel Plated	**0.012** 0.31	**0.445** 11.30	—	X[1]	—	1742049-1

[1] UL/CSA Approved for 18 & 16 AWG only

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

125 Series Receptacles

Insulation Support



A- Receptacle with Insulation Support

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	Terminal Part Number
22-18	A	**.020** 0.51	**.090-.110** 2.29-2.79	Brass	**.010** 0.25	**.635** 16.13	—	—	—	63705-1

110 Series Receptacles

Straight Receptacles



A — FASTON Receptacles with Insulation Support



B — FASTON Receptacles with No Insulation Support

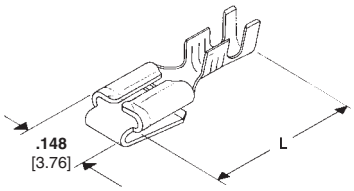

C — Commercial Line Receptacle and Tab Combination

Wire Range AWG	Style	Fits Tab Type[7]	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	Terminal Part Number
26-22	B	—	**.020** 0.51	—	Brass, Tin Plated	**.010** 0.25	**.327** 8.31	—	—	—	63837-1
		—	**.016** 0.41	—	Brass	**.010** 0.25	**.327** 8.31	—	—	—	61818-1
24-22	A	1	**.016** 0.41	**.040-.060** 1.02-1.52	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	—	—	—	42415-1
		1	**.020** 0.51	**.040-.060** 1.02-1.52	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	X[1]	—	X	42067-1
		1	**.020** 0.51	**.040-.060** 1.02-1.52	Brass, Pre-Tin	**.010** 0.25	**.510** 12.95	X	—	X	60089-2
		1	**.032** 0.81	**.040-.060** 1.02-1.52	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	X[1]	—	X	63634-1
22-20	A	2	**.020** 0.51	**.060-.100** 1.52-2.54	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	X	—	X	42236-1
22-18	A	1	**.012** 0.31	**.060-.100** 1.52-2.54	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	—	—	—	60415-1
		1	**.016** 0.41	**.060-.100** 1.52-2.54	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	—	—	—	60118-1
		2	**.016** 0.41	**.090-.130** 1.52-2.54	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	—	—	—	62523-1
		1	**.020** 0.51	**.060-.100** 1.52-2.54	Brass	**.010** 0.25	**.635** 16.13	X	—	X	42068
		1	**.020** 0.51	**.060-.100** 1.52-2.54	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	X	—	X	42068-1
		1	**.020** 0.51	**.090-.130** 1.52-2.54	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	X	—	X	62094-1
		1	**.020** 0.51	**.090-.130** 1.52-2.54	Brass	**.010** 0.25	**.635** 16.13	X	—	X	62094-2
		2	**.020** 0.51	**.120-.140** 3.05-3.56	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	X	—	X	60729-1
		1	**.025** 0.51	**.120-.140** 3.05-3.56	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	—	—	—	61158-1
		1	**.032** 0.81	**.060-.100** 1.52-2.54	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	X	—	X	60197-1
		3	**.032** 0.81	**.060-.100** 1.52-2.54	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	X	—	X	60577-1
		1	**.032** 0.81	**.120-.140** 3.05-3.56	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	X	—	X	63954-1

[1] UL listed 22 AWG wire only.
[2] No Dimple.
[3] Dimple at special location.
[4] Side feed.
[5] Tab Thickness .020 [0.51].
[6] Tab Thickness .032 [0.81].
[7] Stress relieved.
[8] See page 28 for Mating Tab Designs.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

110 Series Receptacles (Continued)

Straight Receptacles (Continued)



A — FASTON Receptacles with Insulation Support



B — FASTON Receptacles with No Insulation Support

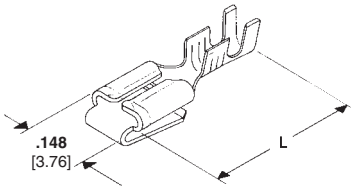

C — Commercial Line Receptacle and Tab Combination

Wire Range AWG	Style	Fits Tab Type[8]	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	Terminal Part Number
22-18	C	1	**.018** 0.46	**.080-.120** 2.03-3.05	Brass	**.010** 0.25	**.630** 16.00	—	—	63242-1[5]
		1	**.020** 0.51	**.060-.100** 1.52-2.54	Brass	**.010** 0.25	**.630** 16.00	X	X	62003-1[5]
		1	**.020** 0.51	**.060-.100** 1.52-2.54	Brass, Tin Plated	**.010** 0.25	**.630** 16.00	X	X	62003-2[5]
		1	**.032** 0.81	**.080-.120** 2.03-3.05	Brass, Tin Plated	**.010** 0.25	**.630** 16.00	X	X	63961-1[5]
		1	**.032** 0.81	**.080-.120** 2.03-3.05	Brass, Tin Plated	**.010** 0.25	**.630** 16.00	—	—	1217145-1[6]
20-18 or (2) 20	B	1	**.016** 0.41	—	Brass, Pre-Tin	**.010** 0.25	**.475** 12.07	—	—	42398-1
		1	**.020** 0.51	—	Brass, Pre-Tin	**.010** 0.25	**.475** 12.07	X	X	42399-1
		1	**.032** 0.81	—	Brass, Pre-Tin	**.010** 0.25	**.475** 12.07	X	X	60601-1
20-18	B	—	**.020** 0.51	—	Brass, Pre-Tin	**.010** 0.25	**.380** 9.65	X	X	62850-1[2]
		—	**.020** 0.51	—	Brass, Tin Plated	**.010** 0.25	**.380** 9.65	X	X	62850-2[2]
20-16	A	1	**.010** 0.25	**.060-.100** 1.52-2.54	Brass, Pre-Tin	**.010** 0.25	**.625** 15.88	—	—	62968-1
		1	**.020** 0.51	**.060-.100** 1.52-2.54	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	X	X	61408-1
		1	**.020** 0.51	**.060-.100** 1.52-2.54	Steel, Nickel Plated	**.010** 0.25	**.635** 16.13	—	X	1217102-1
		1	**.020** 0.51	**.120-.140** 3.05-3.56	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	X	X	61400-1
		1	**.020** 0.51	**.150-.170** 3.81-4.32	Brass, Tin Plated	**.010** 0.25	**.635** 16.13	X	X	62191-1
		1	**.032** 0.81	**.120-.140** 3.05-3.56	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	X	X	62050-1
		1	**.032** 0.81	**.120-.140** 3.05-3.56	Steel, Nickel Plated	**.010** 0.25	**.635** 16.13	—	X	62050-2
		2	**.032** 0.81	**.120-.140** 3.05-3.56	Brass, Pre-Tin	**.010** 0.25	**.635** 16.13	X	X	63703-1
	B	1	**.016** 0.41	—	Brass, Pre-Tin	**.010** 0.25	**.537** 13.64	—	—	61457-1
		1	**.032** 0.81	—	Brass, Pre-Tin	**.010** 0.25	**.415** 10.54	X	X	63560-1
18-14	A	—	**.032** 0.81	**.110-.190** 2.79-4.83	Brass, Tin Plated	**.012** 0.30	**.625** 15.88	—	—	63093-1[2, 7]
	B	—	**.020** 0.51	—	Brass, Tin Plated	**.010** 0.25	**.475** 12.07	X	X	62474-1[3,4]
		1	**.020** 0.51	—	Brass, Pre-Tin	**.010** 0.25	**.475** 12.07	X	X	62852-1[4]

[1] UL listed 22 AWG wire only.
[2] No Dimple.
[3] Dimple at special location.
[4] Side feed.
[5] Tab Thickness .020 [0.51].
[6] Tab Thickness .032 [0.81].
[7] Stress relieved.
[8] See page 28 for Mating Tab Designs.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

110 Series F-Crimp Flags

Flag Receptacles



A — FASTON Flag Receptacle with Insulation Support



B — FASTON Flag Receptacle with Insulation Support

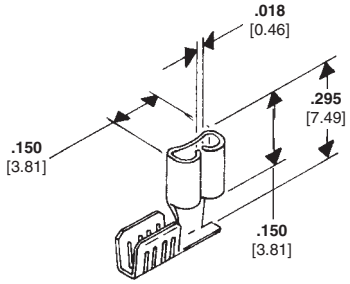

C — FASTON Flag Receptacle with No Insulation Support

Wire Range AWG	Style	Fits Tab Type[2]	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	SEMKO	Terminal Part Number
26-22	B	*	**.020** 0.51	**.040-.080** 1.02-2.03	Brass, Pre-Tin	**.010** 0.25	**.430** 10.92	X[3]	—	X[3]	1742219-1
22-18	A	*	**.016** 0.41	**.065-.100** 1.65-2.54	Brass, Pre-Tin	**.010** 0.25	**.460** 11.68	—	—	—	61459-1
		*	**.020** 0.51	**.065-.100** 1.65-2.54	Brass, Pre-Tin	**.010** 0.25	**.460** 11.68	X	—	X	61372-1
		*	**.020** 0.51	**.065-.100** 1.65-2.54	Brass, Tin Plated	**.012** 0.30	**.460** 11.68	X	—	X	60605-1
		*	**.025** 0.64	**.065-.100** 1.65-2.54	Brass, Pre-Tin	**.010** 0.25	**.460** 11.68	—	—	—	61530-1
		*	**.032** 0.81	**.065-.100** 1.65-2.54	Brass, Pre-Tin	**.010** 0.25	**.460** 11.68	X	—	X	61971-1
	B	*	**.020** 0.51	**.060-.100** 1.52-2.54	Brass, Pre-Tin	**.010** 0.25	**.430** 10.92	X	—	X	61481-1
		*	**.020** 0.51	**.060-.100** 1.52-2.54	Brass, Tin Plated	**.012** 0.30	**.430** 10.92	X	—	X	61070-1
		*	**.020** 0.51	**.060-.100** 1.52-2.54	Brass	**.012** 0.30	**.430** 10.92	X	—	X	61070-2
		*	**.025** 0.64	**.060-.100** 1.52-2.54	Brass, Pre-Tin	**.010** 0.25	**.430** 10.92	—	—	—	1217138-1
		*	**.032** 0.81	**.060-.100** 1.52-2.54	Brass, Pre-Tin	**.010** 0.25	**.430** 10.92	X	—	X	62336-1
		*	**.032** 0.81	**.060-.100** 1.52-2.54	Steel, Nickel Plated	**.010** 0.25	**.430** 10.92	—	—	—	62336-2
22-16	C	—	**.015** 0.38	—	Brass, Pre-Tin	**.010** 0.25	**.295** 7.49	—	—	—	63990-1
		—	**.020** 0.51	—	Brass	**.012** 0.30	**.295** 7.49	X[1]	—	X	60991-1
		—	**.020** 0.51	—	Brass, Pre-Tin	**.010** 0.25	**.295** 7.49	X[1]	—	X	61549-1
		1	**.020** 0.51	—	Brass, Pre-Tin	**.010** 0.25	**.295** 7.49	X[1]	—	X	62321-1

* No Tab Type
[1] UL listed and CSA certified for 22-18 AWG.
[2] See below for Mating Tab Designs.
[3] UL listed and CSA certified for 22 AWG wire only.

Mating 110 Series Tab Designs



Mating 110 Series Tab Dimension Type 1



Mating 110 Series Tab Dimensions Type 2



Mating 110 Series Tab Dimensions Type 3

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

AMPLIVAR Receptacles

250 Series FASTON Receptacles

Stock Thickness — .016 [0.41]

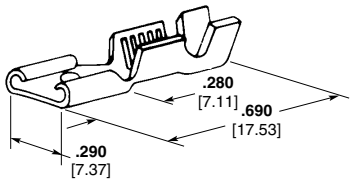

Magnet Wire Range AWG	Magnet Wire Range mm²	Insulation Diameter	Mating Tab Thk.	Material	Material Thickness	Part Number
24-19	0.23-0.70	**.050-.080** 1.30-2.00	**.020** 0.51	Brass / Tin Plated Brass	**.016** 0.41	63623-1[1] / 63623-2[1]
23-19 or (2) 24 or (2) 26	0.29-0.70 or (2) 0.23 or (2) 0.15	**.050-.100** 1.30-2.55	**.025** 0.64	Brass	**.016** 0.41	62069-1[3]
20-16 or (2) 23 or (2) 20	0.57-1.39 or (2) 0.29 or (2) 0.57	**.100-.140** 2.55-3.55 or (2) **.060** 1.52 Max.	**.032** [0.81]	Brass / Tin Plated Brass	**.016** 0.41	60384-1 / 60384-2
20-16	0.57-1.39	**.100-.140** 2.55-3.55	**.020** 0.51	Brass	**.016** 0.41	62080-1
18-14 or (2) 17	0.88-2.19 or (2) 1.11	**.120-.170** 3.05-4.30 or (2) **.060** 1.52 Max.	.032 [0.81]	Tin Plated Brass	**.016** 0.41	60385-2
18-14 or (2) 19	0.88-2.19 or (2) 0.70	**.120-.170** 3.05-4.30	**.020** 0.51	Brass	**.016** 0.41	63622-1[1]
18-14 or (2) 19	0.88-2.19 or (2) 0.70	**.120-.170** 3.05-4.30	**.032** 0.81	Brass	**.016** 0.41	1217835-1

[1] Low insertion force
[2] Quick-Change Applicator for AMP-O-LECTRIC Machine 565435-5.
[3] Mates to .025 [0.64] thick tab.

187 Series FASTON Receptacle

Stock Thickness — .016 [0.41]



Magnet Wire Range AWG	Magnet Wire Range mm²	Insulation Diameter	Mating Tab Thk.	Material	Material Thickness	Part Number
20-16	0.57-1.39	**.050-.090** 1.27-2.29	**.032** 0.81	Tin Plated Phosphor Bronze	**.016** 0.41	1742678-2

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

AMPLIVAR Receptacles (Continued)

187 Series FASTON Flag Receptacles

Stock Thickness — .016 [0.41]



Magnet Wire Range		Insulation Diameter	Mating Tab Thk.	Material	Material Thickness	Part Number
CMA	mm²					
500-1200	0.25-0.61	**.020-.040** 0.51-1.02	**.020** 0.51	Tin Plated Brass	**.016** 0.41	63942-1
24-20 AWG	0.2-0.5	**.020-.040** 0.51-1.02	**.032** 0.81	Tin Plated Brass	**.016** 0.41	1217624-1
20-16 AWG	0.57-1.39	**.050-.090** 1.27-2.29	**.032** 0.81	Tin Plated Phosphor Bronze	**.016** 0.41	1742679-2
1200-2350	0.61-1.19	**.020-.040** 0.51-1.02	**.020** 0.51	Tin Plated Brass	**.016** 0.41	63941-1
2000-4000	1.01-2.03	**.020-.040** 0.51-1.02	**.032** 0.81	Tin Plated Brass	**0.016** 0.41	1217955-1
2000-4050	1.01-2.05	**.020-.040** 0.51-1.02	**.020** 0.51	Tin Plated Brass	**.016** 0.41	63940-1
2000-4050	1.01-2.05	**.020-.040** 0.51-1.02	**.032** 0.81	Tin Plated Brass	**.016** 0.41	1217417-1
3000-6000	1.52-3.04	**.020-.040** 0.51-1.02	**.020** 0.51	Tin Plated Brass	**.016** 0.41	1217899-1

250 Series FASTON Flag Receptacles

Stock Thickness — .018 [0.45]

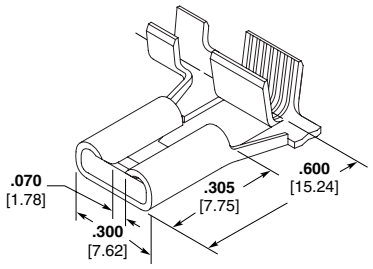

Magnet Wire Range		Insulation Diameter	Mating Tab Thk.	Material	Material Thickness	Part Number
CMA	mm²					
16-12	1.39-3.47	**.120-.170** 3.05-4.32	**.032** 0.81	Tin Plated Phos Bronze	**.018** 0.45	63944-1

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Miscellaneous Tab Receptacles

Tab Receptacles



A



B

Wire Range AWG	Wire Range mm²	Type	Insul. Dia. Range	Stock Thk.	Material and Finish	Fits Tab	Dimensions E	Dimensions L	Dimensions W	Part No.
26-22	0.12-0.4	A	**.035-.065** 0.89-1.65	**.010** .025	Pre-Tin Brass	**.031 x .093** 0.79 x 2.36	**.190** 4.83	**.475** 12.06	**.120** 3.05	61813-1[5]
24-20	0.2-0.6	A	**.040-.080** 1.02-2.03	**.010** 0.25	Tin Plated Brass	**.031 x .062** 0.79 x 1.57	**.187** 4.75	**.462** 11.73	**.090** 2.29	60900-1[1] 60900-4[2]
		B	—	**.010** 0.25	Tin Plated Brass	**.015 x .050** 0.38 x 1.27	**.145** 3.68	**.310** 7.87	**.070** 1.78	62352-1
22-18	0.3-0.9	A	**.050-.085** 1.27-2.16	**.010** 0.25	Pre-Tin Brass	**.010 x .093** 0.25 x 2.36	**.190** 4.83	**.480** 12.19	**.120** 3.05	63391-1[3,4] 63391-2[4]
20-18	0.5-0.9	A	**.080-.120** 2.03-3.05	**.010** 0.25	Pre-Tin Brass	**.032 x .103** 0.81 x 2.62	**.200** 5.08	**.480** 12.19	**.126** 3.2	60252-1[6]
					Pre-Tin Brass	**.020 x .103** 0.51 x 2.62	**.200** 5.08	**.480** 12.19	**.126** 3.2	60432-1[6]

[1] Available in loose piece form, order Part Number 61454-1.
[2] Reverse reel of 60900-1.
[3] Loose piece form of Part Number 63391-2.
[4] Mechanically compliant base.
[5] No dimple.
[6] Dimple.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Tabs

312 and 250 Series (High Temperature 700° F / 371° C Max.)

TE offers a variety of FASTON tabs in an assortment of configurations. The product line includes various weld type tabs, stud mounted tabs and wire crimp tabs. Also included in the product offering are high temperature tabs and test tabs.

The TE high-temperature tab is designed to crimp to heating element wire. The tab end protrudes through a ceramic/high-temperature housing for mating with either a standard 250 or 312 FASTON receptacle.

Stock Thickness — .032 [0.81]

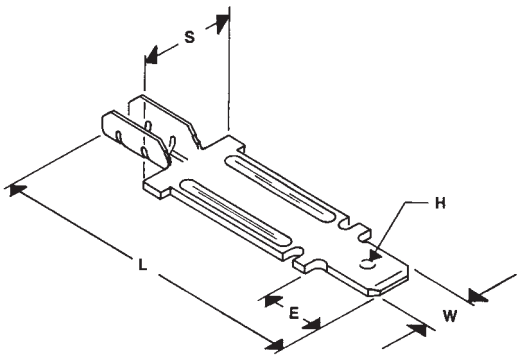

Style A

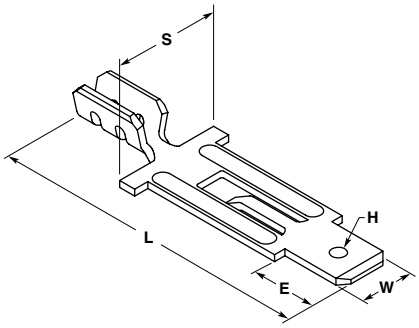

Style B

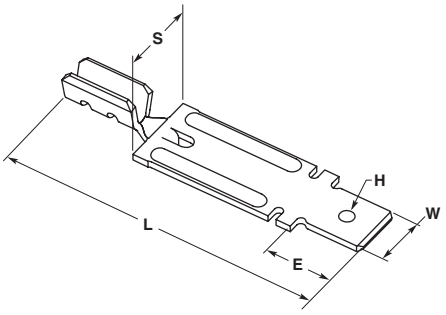

Style C

Series	Solid Wire Range AWG	Style	Tab Thickness	Dimensions L	W	E	S	H	Material and Finish	Terminal Part No.[1]
312	22-15	A	**.032** 0.81	**1.570** 39.88	**.312** 7.92	**.387** 9.83	**.500** 12.70	Hole	Nickel Plated Steel	63300-1
		C	**.032** 0.81	**1.570** 39.88	**.312** 7.92	**.387** 9.83	**.375** 9.53	Hole	Nickel Plated Steel	63390-1
250	22-15	A	**.032** 0.81	**1.500** 38.10	**.250** 6.35	**.312** 7.92	**.500** 12.70	Dimple	Nickel Plated Steel	63301-1
	20-15	A	**.032** 0.81	**1.500** 38.10	**.250** 6.35	**.312** 7.92	**.500** 12.70	Hole	Nickel Plated Steel	63522-1
250	20-15	B	**.032** 0.81	**1.500** 38.10	**.250** 6.35	**.312** 7.92	**.500** 12.70	Dimple	Nickel Plated Steel	63104-1
	22-15	C	**.032** 0.81	**1.500** 38.10	**.250** 6.35	**.312** 7.92	**.370** 9.40	Dimple	Nickel Plated Steel	1217006-1

[1] Contact technical support for tooling application.

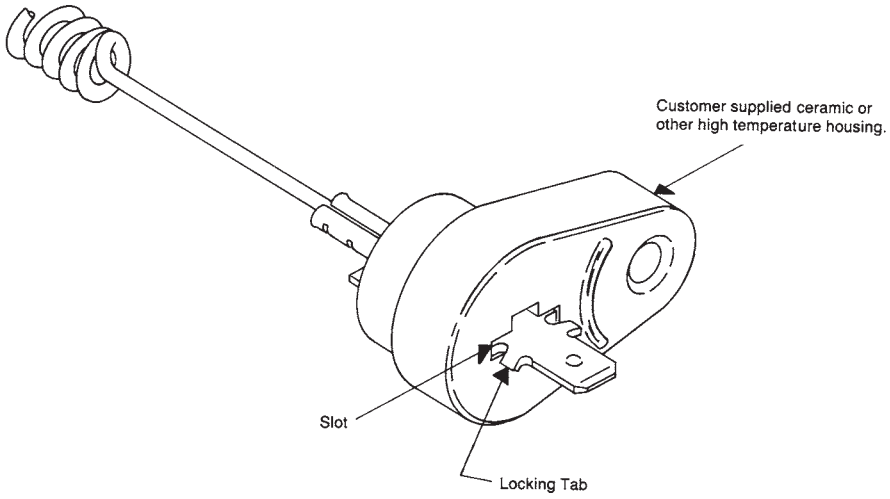

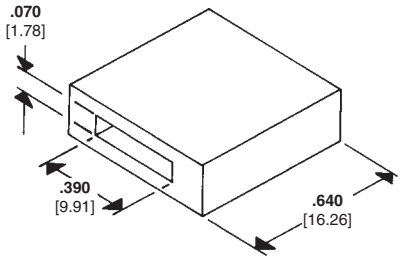

Recommended Housing Dimensions

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Tabs (Continued)

250 Series Wire Crimp Tabs



A — 250 Series Flag FASTON Tab

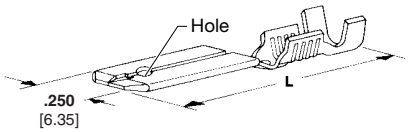

B — 250 Series Wire Crimp Tab

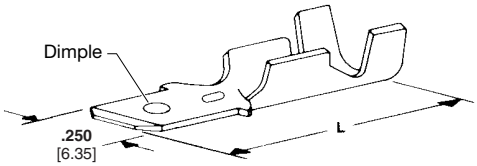

C — 250 Series Wire Crimp Tab

Wire Range AWG	Style	Tab Thickness	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	Terminal Part No.
22-18	B	**.032** 0.81	**.080-.120** 2.03-3.05	Brass	**.015** 0.38	**.815** 20.70	—	X	42475-3
		.032 0.81	**.080-.120** 2.03-3.05	Brass, Tin Plated	**.015** 0.38	**.815** 20.70	—	X	42475-4
18-14	A	**.032** 0.81	**.080-.125** 2.03-3.18	Brass, Tin Plated	**.032** 0.81	**.500** 12.70	X	X	42770-2
	B	**.032** 0.81	**.110-.150** 2.79-3.81	Brass	**.015** 0.38	**.810** 20.57	—	X	42474-3
		.032 0.81	**.110-.150** 2.79-3.81	Brass, Tin Plated	**.015** 0.38	**.810** 20.57	—	X	42474-4
	C	**.032** 0.81	**.120-.170** 3.05-4.32	Brass	**.032** 0.81	**.775** 19.69	X	—	X	41411
		.032 0.81	**.120-.170** 3.05-4.32	Brass, Tin Plated	**.032** 0.81	**.775** 19.69	X	—	X	41412
		.032 0.81	**.120-.170** 3.05-4.32	Brass	**.032** 0.81	**.775** 19.69	X	—	X	63761-1[1]
14-12	B	**.032** 0.81	**.110-.170** 2.79-4.32	Brass, Tin Plated	**.015** 0.38	**.810** 20.57	—	X	X	61281-3
		.032 0.81	**.110-.170** 2.79-4.32	Brass, Silver Plated	**.015** 0.38	**.810** 20.57	—	X	X	61362-2

[1] Hole.

205 Series Wire Crimp Tabs

Stock Thickness — .020 [0.51]

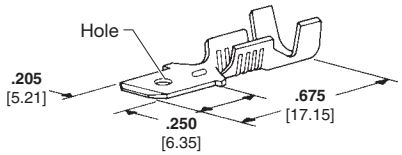

A — 205 Series Wire Crimp Tab

Wire Range AWG	Style	Tab Thickness	Insulation Diameter	Material and Finish	UL	CSA	Terminal Part No.
18-14	A	**.020** 0.51	**.120-.150** 3.05-3.81	Brass, Tin Plated	X	—	X	62531-1
		.020 0.51	**.120-.150** 3.05-3.81	Brass, Tin Plated	X	—	X	63223-1[1]

[1] No hole.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Tabs (Continued)

187 Series Wire Crimp Tabs

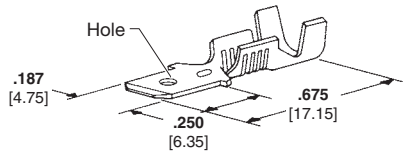

A — 187 Series Wire Crimp Tab

Wire Range AWG	Style	Tab Thickness	Insulation Diameter	Material and Finish	Stock Thickness	UL	CSA	Terminal Part No.
22-18	A	**.020** 0.51	**.080-.120** 2.03-3.05	Brass, Tin Plated	**.020** 0.51	X	—	X	42490-3
		.020 0.51	**.080-.120** 2.03-3.05	Brass	**.020** 0.51	X	—	X	42490-4
18-14	A	**.020** 0.51	**.120-.150** 3.05-3.81	Brass	**.020** 0.51	X	—	X	60850-1
		.020 0.51	**.120-.150** 3.05-3.81	Brass, Tin Plated	**.020** 0.51	X	—	X	60850-2
		.032 0.81	**.120-.150** 3.05-3.81	Brass, Tin Plated	**.032** 0.81	X	—	X	61687-2[1]

[1] Premilled dual stock thickness, tab .032 [0.81], body .020 [0.51].

110 Series Wire Crimp Tabs



A - 110 Series Wire Crimp Tab



B — 110 Series Wire Crimp Tab with Insulation Support

Wire Range AWG	Style	Tab Thickness	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	CSA	Terminal Part No.
26-22	A	**.020** 0.51	—	Brass, Tin Plated	**.020** 0.51	**.490** 12.45	X	—	X	62887-1
		.020 0.51	—	Brass, Tin Plated over Copper	**.020** 0.51	**.490** 12.45	X	—	X	62887-2
22-18	B	**.032** 0.81	—	Brass, Tin Plated	**.020** 0.51	**.490** 12.45	X	—	X	63932-1[2]
	A	**.020** 0.51	—	Brass, Pre-Tin Plated	**.020** 0.51	**.485** 12.32	X	—	X	62122-1
		.020 0.51	—	Brass, Pre-Tin Plated	**.020** 0.51	**.570** 14.48	X	—	X	62384-1
	B	**.032** 0.81	**.070-.130** 1.78-3.30	Brass, Tin Plated	**.032** 0.81	**.625** 15.88	X	—	X	63138-1
20-16	A	**.020** 0.51	—	Brass, Pre-Tin Plated	**.020** 0.51	**.570** 14.48	—	—	—	1217118-1[1]

[1] .052 [1.32] dia. hole.
[2] No insulation support.

.060 Series Wire Crimp Tabs

Stock Thickness — .032 [0.81]



A - .060 Series Wire Crimp Tab

Wire Range AWG	Style	Tab Thickness	Insulation Diameter	Material and Finish	L (Overall Length)	UL	CSA	Terminal Part No.
23-19	A	**.032** 0.81	—	Brass, Tin Plated	**.740** 18.80	X	—	X	63497-1[1]
22-16	A	**.032** 0.81	—	Brass, Tin Plated	**.740** 18.80	X	—	X	63893-1

[1] AMPLIVAR connector type serrations for magnet wire.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Tabs (Continued)

AMPLIVAR Tabs (For Use with Magnet Wire)

187 Series FASTON Tabs

Board Thickness —
A = .062–.072 [1.57–1.83]

Stock Thickness —
A = .020 [0.51]
B = .032 [0.81]



A

Style	Wire Range AWG	Wire Range mm²	Material	Dim. L			Part Number
A	22-16	0.3-1.4	Tin Plated Brass	**1.015** 25.78	—	—	62447-1
	15-12	1.6-3.0	Tin Plated Brass	**1.015** 25.78	—	—	62445-1

250 Series FASTON Tabs

Stock Thickness — .032 [0.81]

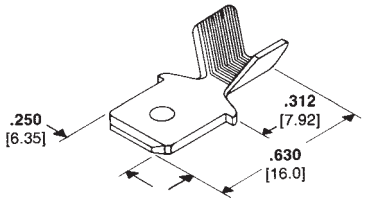

Wire Range AWG	Wire Range mm²	Material			Part Number
18-14	1.0-1.7	Tin Plated Brass	—	—	63349-1[1]
16-12	1.3-3.0	Tin Plated Brass	—	—	62922-1[1]

[1] Varnish resistant coating.

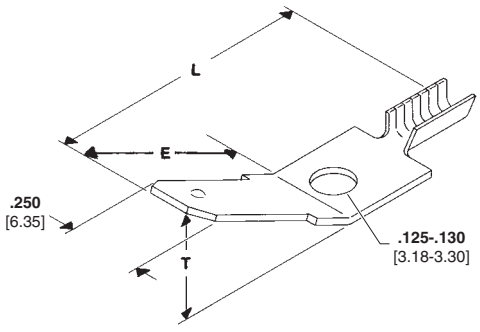

A

Style	Wire Range CMA	Wire Range AWG	Wire Range mm²	Material	Dimensions L	Dimensions E	Dimensions T			Part Number
A	200-566	27.5-23	—	Tin Plated Brass	**.580** 14.73	**.342** 8.69	45°	—	—	63136-1

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Tabs (Continued)

250, 205 and 187 Series FASTON Tabs

(Mates with all 250, 205 and 187 Series FASTON Receptacles)

250 and 187 Series Weld Type Tabs

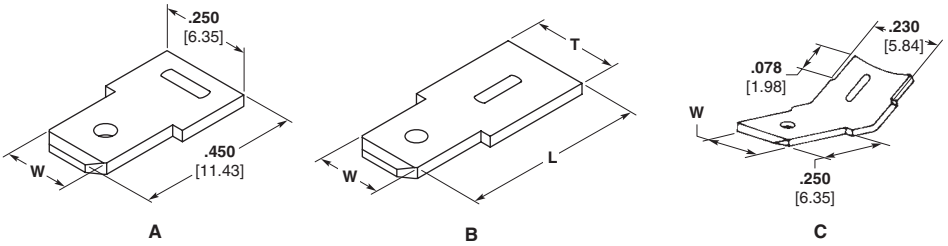

Style	Dimensions W	Dimensions L	Dimensions T	Stock Thickness	Material and Finish	Terminal Part No.	UL	CSA
A	**.250** 6.35	**.635** 16.13	**.295** 7.49	**.032** 0.81	Nickel Plated Steel	42559-1[1]	X	X
	.187 4.75	**.450** 11.43	**.250** 6.35	**.032** 0.81	Nickel Plated Steel	63771-1	—	—
B	**.250** 6.35	**.825** 20.96	**.375** 9.53	**.032** 0.81	Nickel Plated Steel	1217002-1	—	—
C	**.187** 4.75	**.250** 6.35	**.230** 5.84	**.020** 0.51	Nickel Plated Steel	61960-1	X	X

[1] No weld rib.

250 Series Stud Mount Type Tabs

Stock Thickness — .032 [0.81]
Dimple (Both Sides)

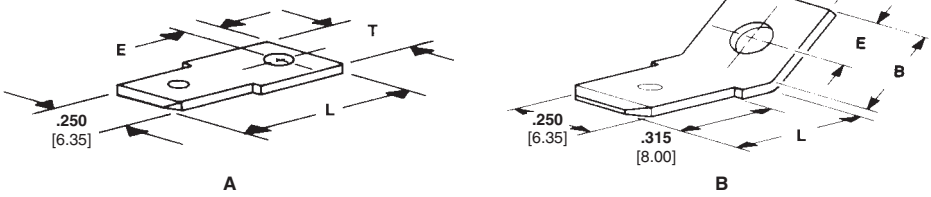

Style	Stud Diameter	Dimensions B	Dimensions L	Dimensions E	Dimensions T	Material and Finish	Terminal Part No.	UL	CSA
A	**.177** 4.50	—	**.715** 18.16	**.170** 4.32	**.295** 7.49	Brass	63038-2	X	—
			.715 18.16	**.170** 4.32	**.295** 7.49	Tin Plated Brass	63038-1	X	X
	.171 4.34	—	**.940** 23.88	**.125** 3.18	**.280** 7.11	Brass	1217558-1	—	—
			.940 23.88	**.125** 3.18	**.280** 7.11	Tin Plated Brass	1217558-2	—	—
B	**.130** 3.30	**.300** 7.62	**.400** 10.16	**.170** 4.32	**.295** 7.49	Tin Plated Brass	42822-2	X	X
	.145 3.68	**.300** 7.62	**.400** 10.16	**.170** 4.32	**.295** 7.49	Tin Plated Brass	42822-4	X	X
	.171 4.34	**.330** 8.38	**.375** 9.53	**.170** 4.32	**.295** 7.49	Brass	60465-1	X	X
						Tin Plated Brass	60465-2	X	X
	.203 5.16	**.330** 8.38	**.375** 9.53	**.170** 4.32	**.295** 7.49	Tin Plated Brass	61365-1	X	X
	.197 5.00	**.330** 8.38	**.375** 9.53	**.170** 4.32	**.295** 7.49	Tin Plated Brass	61499-1	X	X

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Tabs (Continued)

250 Series
Stud Mount Type Tabs
(Continued)

Stock Thickness — .032 [0.81]
Dimple (Both Sides)

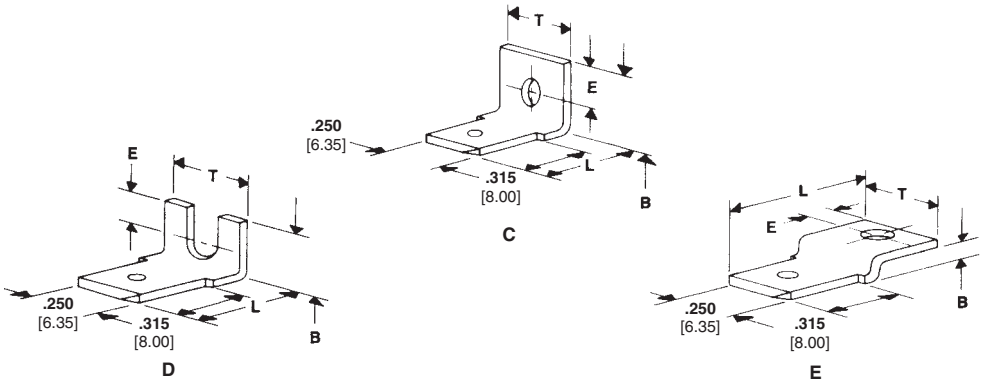

Style	Stud Diameter	Dimensions B	L	E	T	Material and Finish	Terminal Part No.	UL	CSA
C	**.097** 2.46	**.250** 6.35	**.440** 11.18	**.093** 2.36	**.295** 7.49	Brass	41339	X	X
	.130 3.30	**.330** 8.38	**.440** 11.18	**.170** 4.32	**.295** 7.49	Tin Plated Brass	42095-1	X	X
		.270 6.86	**.440** 11.18	**.110** 2.79	**.295** 7.49	Tin Plated Brass	42117-2	X	X
	.171 4.34	**.330** 8.38	**.440** 11.18	**.170** 4.32	**.295** 7.49	Brass	42214-1	X	X
						Tin Plated Brass	42214-2	X	X
		.313 7.95	**.656** 16.67	**.125** 3.18	**.250** 6.35	Tin Plated Brass	62314-2	X	X
	.203 5.16	**.472** 11.99	**.394** 10.00	—	**.295** 7.49	Tin Brass	63971-1	—	—
D	**.125** 3.18	**.235** 5.97	**.440** 11.18	**.125** 3.18	**.295** 7.49	Brass	41398	X	X
	.171 4.34	**.330** 8.38	**.440** 11.18	**.120** 3.05	**.205** 5.20	Brass	62166-1	X	X
E	**.130** 3.30	**.068** 1.73	**.615** 15.62	**.093** 2.36	**.295** 7.49	Tin Plated Brass	42506-2	X	X

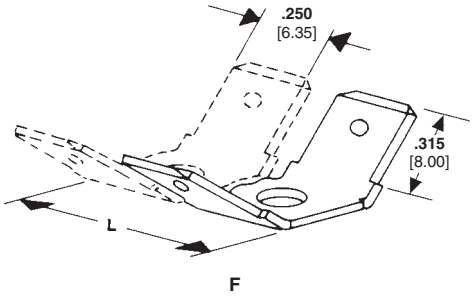

Style	Pairs	Stud Diameter	Dim. L	Material and Finish	Terminal Part No.	UL	CSA
F	2	**.130** 3.30	**.690** 17.53	Tin Plated Brass	41478	X	X
		.171 4.34	**.690** 17.53	Brass	41617	X	X
	4	**.130** 3.30	**1.455** 36.96	Tin Plated Brass	41484	X	X

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Tabs (Continued)

250 Series
Stud Mount Type Tabs
(Continued)

Stock Thickness — .032 [0.81]
Dimple (Both Sides)

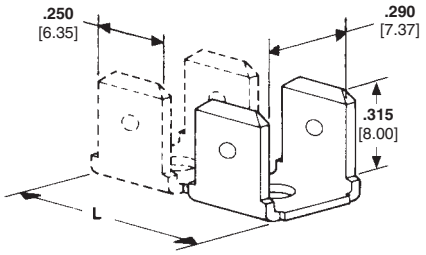

G

Style	Pairs	Stud Diameter	Dim. L	Material and Finish	Terminal Part No.	UL	CSA
G	1	**.130** 3.30	**.315** 8.00	Brass	41290	X	X
	2	**.130** 3.30	**.690** 17.53	Brass	41291	X	X
	3	**.130** 3.30	**1.065** 27.05	Brass	41292	X	X
	4	**.130** 3.30	**1.440** 36.58	Brass	41370	X	X
	1	**.130** 3.30	**.315** 8.00	Tin Plated Brass	41480	X	X
	2	**.130** 3.30	**.690** 17.53	Tin Plated Brass	41481	X	X
	3	**.130** 3.30	**1.065** 27.05	Tin Plated Brass	41482	X	X
	—	**.130** 3.30	—	Tin Plated Brass	42115-4[1]	X	X
				Brass	42115-6[1]	X	X
	1	**.171** 4.34	**.315** 8.00	Brass	41619	X	X
				Tin Plated Brass	42802-1	X	X
		.097 2.46	**.315** 8.00	Tin Plated Brass	60080-2	X	X

[1] In continuous strip-form.

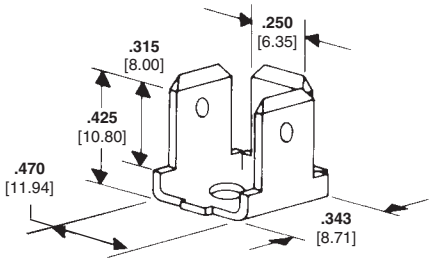

H

Style	Stud Diameter	Material and Finish	Terminal Part No.	UL	CSA
H	**.130** 3.30	Brass	62261-1	X	X

205 Series
Stud Mount Type Tabs

Tab Thickness — .032 [0.81]



Stud Diameter	Material and Finish	Terminal Part No.	UL	CSA
.145 3.68	Brass	62168-1	X	X
.130 3.30	Brass	61836-1	X	X

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Tabs (Continued)

187 Series
Stud Mount Type Tabs —
Hole in Tab



A



B



C



D

Style	Stud Diameter	Stock Thickness	Material and Finish	Terminal Part No.		
A	**.130** 3.30	**.020** 0.51	Tin Plated Brass	61951-1	X	X
	.197 5.00	**.020** 0.51	Tin Plated Brass	61914-1	X	X
B	**.145** 3.68	**.020** 0.51	Tin Plated Brass	61407-3	X	X
C	**.130** 3.30	**.020** 0.51	Tin Plated Brass	61761-2[2]	X	X
	.145 3.68	**.020** 0.51	Brass	62576-1[2]	X	X
	.171 4.34	**.020** 0.51	Tin Plated Brass	61664-1[2]	X	X
D	**.130** 3.30	**.020** 0.51	Tin Plated Brass	63946-1	—	—
	.145 3.68	**.020** 0.51	Tin Plated Brass	1742041-1	—	—

[1] Weld tab.
[2] Bent 45°.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Tabs (Continued)

250 Series Test Tabs

(Mate with all "250" Series FASTON Receptacles)

The mechanical tab is mounted onto TE gauge 100505 for testing of receptacle insertion/extraction requirements. Double-ended test tabs are also available for electrical and temperature rise testing. TE has readily available a variety of UL 310 constructed tabs for mechanical testing of FASTON, Ultra-Fast FASTON and Positive Lock receptacles. These tabs are designed for electrical test setups as outlined in UL 310 (See instruction sheet 408–7432 for recommended procedure mechanical test).

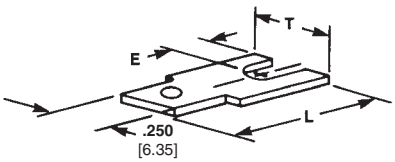

Mechanical
A

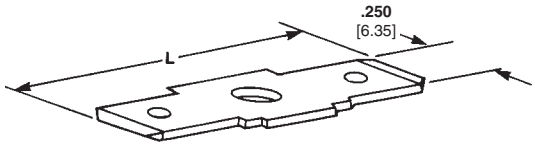

Electrical
B

Style	Stud Diameter	Stock Thickness	Dimensions L	Dimensions E	Dimensions T	Material and Finish	UL	CSA	Terminal Part No.
A	.125 3.18	.032 0.81	.625 15.88	.125 3.18	.295 7.49	Brass	X	X	60447-1[1,3]
		.020 0.51	.635 16.13	.125 3.18	.295 7.49	Brass	—	—	63633-1[2]
		.032 0.81	.625 15.88	.125 3.18	.295 7.49	Brass	—	—	63274-1[2]
B	.145 3.68	.032 0.81	1.010 25.65	—	—	Tin Plated Steel	—	—	62627-1[3]
						Brass	—	—	62627-2[3]
						Brass	—	—	62627-3[2]

[1] Mechanical test tab for use with TE gauge number 100505.
[2] Test tab with hole for Positive Lock.
[3] Dimple.

205 Series Test Tabs



Mechanical
A



Electrical
B

Style	Hole Diameter	Stock Thickness	Dimensions B	Dimensions L	Dimensions E	Dimensions T	Material and Finish	UL	CSA	Terminal Part No.
A	.125 3.18	.020 0.51	—	.605 15.37	.090 2.29	.295 7.49	Brass	X	X	60613-1[1]
		.032 0.81	—	.605 15.37	.090 2.29	.295 7.49	Brass	X	X	60613-2[1]
B	.145 3.68	.020 0.51	—	1.276 32.41	—	—	Tin Plated Steel	—	—	60921-4
		.032 0.81	—	1.276 32.41	—	—	Brass	—	—	60922-1
		.020 0.51	—	1.276 32.41	—	—	Brass	—	—	60921-1
		.032 0.81	—	1.276 32.41	—	—	Tin Plated Steel	—	—	60922-5

[1] Mechanical test tab for use with TE gauge number 100505.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Tabs (Continued)

187 Series Test Tabs
(Mates with all "187" Series Receptacles)



Mechanical
A

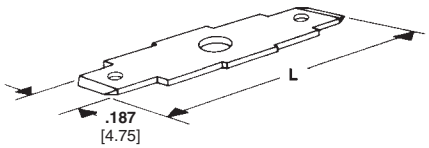

Electrical
B

Style	Pairs	Stud Diameter	Stock Thickness	Dimensions L	Dimensions E	Dimensions T	Material and Finish	UL	CSA	Terminal Part No.
A	—	.125 3.18	.020 0.51	.605 15.37	.090 2.29	.295 7.49	Brass	X	X	60443-1[1]
							Tin Plated Brass	—	—	60443-5[1]
							Brass	—	—	63248-1[1]
			.032 0.81	.605 15.37	.090 2.29	.295 7.49	Brass	X	X	60443-2[1]
							Tin Plated Brass	X	X	60443-6
							Brass	—	—	63248-2
B	1	.145 3.68	.020 0.51	1.276 32.41	—	—	Tin Plated Steel	X	X	60920-4
							Tin Plated Brass	—	—	60920-5
			.032 0.81	1.276 32.41	—	—	Brass	X	X	62298-1
							Tin Plated Steel	X	X	62298-2

[1] Test tab with hole.

125 Series Test Tabs
(Mates with all "125" Series Receptacles)



Mechanical
A

Style	Pairs	Stud Diameter	Stock Thickness	Dimensions L	Dimensions E	Dimensions T	Material and Finish	UL	CSA	Terminal Part No.
A	—	.125 3.18	.020 0.51	.570 14.48	.090 2.29	.295 7.49	Brass	—	—	63747-1

110 Series Test Tabs
(Mates with all "110" Series Receptacles)



Mechanical
A

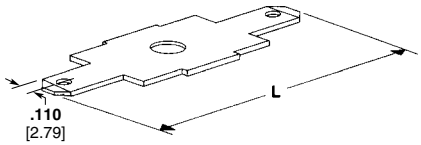

Electrical
B

Style	Stud Diameter	Stock Thickness	Dimensions L	Dimensions E	Dimensions T	Material and Finish	UL	CSA	Terminal Part No.
A	.125 3.18	.020 0.51	.570 14.48	.090 2.29	.295 7.49	Brass	X	X	62061-1
		.032 0.81	.570 14.48	.090 2.29	.295 7.49	Brass	—	—	62061-2
		.016 0.41	.570 14.48	.090 2.29	.295 7.49	Brass	—	—	62061-3
B	.145 3.68	.020 0.51	1.151 29.24	—	—	Tin Plated Steel	X	X	62628-1
		.020 0.51	1.151 29.24	—	—	Brass	X	X	62628-2

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Tab Adapters

250 Series

Fits Tab — .032 [0.81]



A



B



C



D



E

Style	Stock Thickness	Dimensions W	Dimensions L	Dimensions E	Material and Finish	UL	CSA	Terminal Part No.
A	**.018** 0.46 Recpt. / **.032** 0.81 Tabs	**.650** 16.51	**.770** 19.56	**.305** 7.75	Brass	X	X	61765-1
					Tin Plated Brass	X	X	61765-2[1]
B	**.018** 0.46	**.300** 7.62	**.700** 11.78	—	Tin Plated Brass	X	X	61810-2
						X	X	63918-1[2]
C	**.016** 0.41	—	—	—	Nickel Plated Steel	—	—	151302-2
	.016 0.41	—	—	—	Brass (90°)	—	—	152422-1
D	**.016** 0.41 Recpt. / **.032** 0.81 Tabs	—	—	—	Brass	—	—	726308-1
E	**.018** 0.46 Recpt. / **.032** 0.81 Tabs	**.301** 7.65	**.705** 17.91	**.305** 7.75	Brass	X	X	1742597-1[3]

[1] No tab stop on receptacle.
[2] Fits .025 [0.64] thick tab.
[3] .187 [4.75] tab – .250 [6.35] receptacle.

187 Series



A



E

Style	Stock Thickness	Receptacle Fits Tab	Material and Finish	UL	CSA	Terminal Part No.
A	**.013** 0.33 Recpt. / **.020** 0.51 Tabs	**.020** 0.51	Tin Plated Brass	X	X	61045-2
	.013 0.33 Recpt. / **.032** 0.81 Tabs	**.032** 0.81	Tin Plated Brass	X	X	63699-1
E	**.013** 0.33 Recpt. / **.032** 0.81 Tabs	**.032** 0.81	Tin Plated Brass	X	X	1217933-1

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Printed Circuit Board Tabs and Receptacles

Product Facts

- **Full line of PCB tabs and receptacles**
- **Straight and right-angle tabs available in .250, .187 and .110 series**
- **Receptacles produced in .250/.205 x .032 or .025. Standard or low insertion force receptacles available**
- **Strip product for automatic insertion**
- **Compatible with industry insertion equipment or full line of equipment available from TE**



TE now offers a complete line of printed circuit board tabs and receptacles. TE PCB product can be found in switches and on control boards around the world. Our product offering includes .250, .187 and .110 series vertical tabs, .250 and .187 right-angle tabs and .250/.205 vertical receptacles. Product is available in loose piece and strip form. In a short time, our product offering has grown from a handful of part numbers to dozens of parts. We continue to add to our product family as design changes, innovation and customers' requirements expand.

Insertion equipment is available for our entire strip product line. TE currently has an entry level semi-automatic, air-powered bench machine under development for customers with moderate insertion requirements. The compact, fully automatic AccuSerter 2 machine is available for applications where larger volumes will be inserted and where programmable, microprocessor controlled equipment is desired. TE also offers the P300 and P350 series machines for even higher automation. Capabilities include: servo drive, force monitoring, up to three heads. This machine is available in stand-alone or in-line configurations.

The TE product has been designed to be compatible with industry insertion equipment. In many cases, this product will work as a "drop in" replacement for existing product. In some cases, slight modifications or minor tooling changes are necessary. Please consult technical support or the global application tooling group for more details.

TE is one of the only companies that offers printed circuit board tabs and receptacles as well as the crimp to wire receptacles and tabs that offer a complete solution for your packaging needs.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Printed Circuit Board Tabs and Receptacles (Continued)

250 Series Printed Circuit Board Tabs

Stock Thickness — .032 [0.81]
Board Hole Size —
.055 ± .002 [1.40 ± 0.05] Dia.

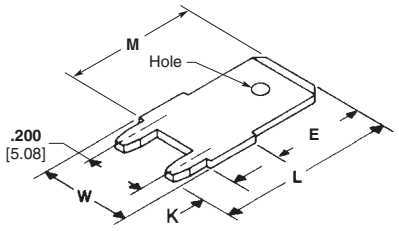

Dimensions					Material and Finish	UL	CSA	Terminal Part No.	
W	L	K	E	M				Strip[2]	Loose Piece[1]
.312 7.92	.502 12.75	.125 3.18	.312 7.92	.377 9.58	Tin Plated Brass	X	X	63839-1[3]	—
	.547 13.89	.157 3.99	.312 7.92	.400 10.16	Tin Plated Brass	X	X	63986-1	—
	.552 14.02	.150 3.81	.312 7.92	.402 10.21	Tin Plated Brass	X	X	1217566-1	—
						X	X	1217539-1	—
.295 7.49	.622 15.80	.125 3.18	.312 7.92	.497 12.62	Tin Plated Brass	X	X	—	62409-1[3]
						—	—	—	1217056-1
.280 7.11	.487 12.37	.125 3.18	.312 7.92	.362 9.19	Tin Plated Brass	X	X	62650-1[3]	—
	.532 13.51	.175 4.45	.312 7.92	.357 9.07	Tin Plated Brass	X	X	63650-1[3]	—
	.622 15.80	.125 3.18	.452 11.48	.497 12.62	Tin Plated Brass	X	X	—	63900-1
						X	X	63755-1[3]	—

[1] Board hole size: .060/.053 [1.52/1.35] dia.
[2] Insertion equipment available.
[3] Dimple.

Stock Thickness — .032 [0.81]
Board Hole Size —
.100 ± .002 [2.54 ± 0.05] Dia.

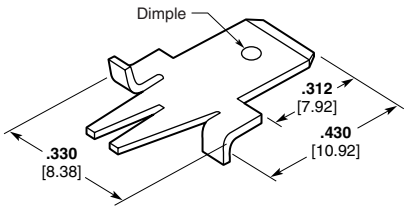

Material and Finish	UL	CSA	Terminal Part No.	
			Strip[1]	Loose Piece
Tin Plated Brass	X	X	63066-1	63067-1

[1] Insertion equipment available.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Printed Circuit Board Tabs and Receptacles (Continued)

250 Series Printed Circuit Board Tabs (Continued)

Stock Thickness — .032 [0.81]
Board Hole Size —
.055 ± .002 [1.40 ± 0.05] Dia.

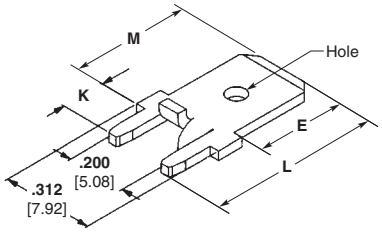

Dimensions				Material and Finish			Terminal Part No.	
L	K	E	M				Strip[1]	Loose Piece
.552 14.02	**.150** 3.81	**.312** 7.92	**.402** 10.21	Tin Plated Brass	X	X	63862-1[2]	1742188-1[2]
					X	X	63824-1	63849-1
.582 14.78	**.180** 4.57	**.312** 7.92	**.402** 10.21	Tin Plated Brass	X	X	1217136-1	1217421-1
.650 16.51	**.150** 3.81	**.410** 10.41	**.500** 12.70	Tin Plated Brass	X	X	1217126-1[2]	—
.710 18.03	**.150** 3.81	**.470** 11.94	**.560** 14.22	Tin Plated Brass	X	X	1217125-1	1217169-1
.780 26.18	**.150** 3.81	**.540** 13.72	**.630** 16.00	Tin Plated Brass	X	X	1217127-1	1217167-1

[1] Insertion equipment available.
[2] Dimple.

Stock Thickness — .032 [0.81]
Board Hole Size —
.055 ± .002 [1.40 ± 0.05] Dia.

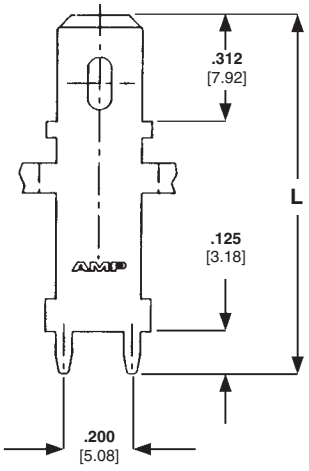

Dimension L	Material and Finish			Terminal Part No.
1.062 26.97	Tin Plated Brass	X	X	63949-1
1.207 30.66	Tin Plated Brass	X	X	63950-1

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Printed Circuit Board Tabs and Receptacles (Continued)

250 Series Printed Circuit Board Tabs (Continued)

Right-Angle Printed Circuit Board Tabs

Stock Thickness — .032 [0.81]
Board Hole Size —
.055 ± .002 [1.40 ± 0.05] Dia.

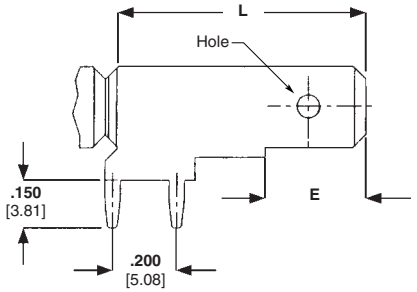

Dimensions		Material and Finish	UL	CSA	Terminal Part No.	
E	L				Strip[1]	Loose Piece
.312 7.92	**.800** 20.32	Tin Plated Brass	X	X	63951-1	1217754-1
.358 9.09	**.630** 16.00	Tin Plated Brass	—	—	—	928814-1
.662 16.83	**1.00** 25.40	Tin Plated Brass	—	—	63952-1	—

[1] Insertion equipment available.

205 Series Printed Circuit Board Only

Stock Thickness — .020 [0.51]
Board Hole Size —
.100 – .095 [2.54 – 2.41] Dia.

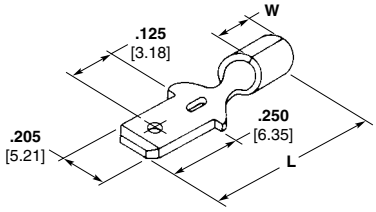

Dimensions		Material and Finish	UL	CSA	Terminal Part No.
L	W				
.525 13.34	**.070** 1.78	Tin Plated Brass	X	X	62411-1[1]
.545 13.84	**.160** 4.06	Tin Plated Brass	X	X	60284-2[1]

[1] Loose piece only.

.250/.205 Printed Circuit Board Receptacles

Stock Thickness — .016 [0.41]

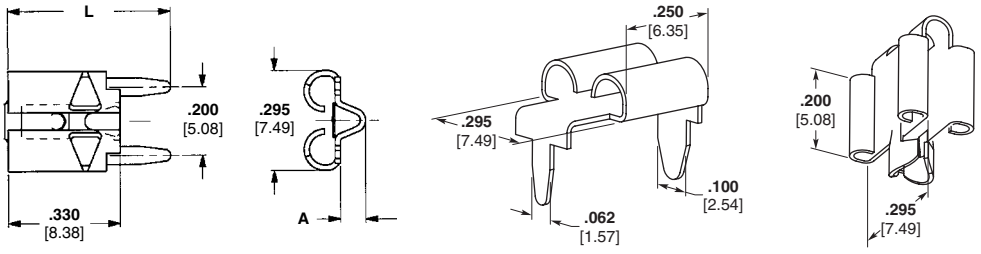

Style	Fits Tab	Dimensions		Material and Finish	UL	CSA	Part No.	
		A	L				Strip	Loose Piece
A	**.032** 0.81 (LIF)	**.075** 1.91	**.480** 12.19	Tin Plated Brass	—	—	63968-1	—
	.032 0.81	**.075** 1.91	**.480** 12.19	Tin Plated Brass	—	—	63969-1	1217080-1
	.025 0.64 (LIF)	**.075** 1.91	**.480** 12.19	Tin Plated Brass	—	—	63994-1	—
	.025 0.64	**.075** 1.91	**.510** 12.95	Tin Plated Brass	—	—	1217137-1[2]	—
			.480 12.19	Tin Plated Brass	—	—	1217180-1	—
B	**.020** 0.51	—	—	Tin Plated Phos Bronze	—	—	1217107-1[1]	—
C	**.250 x .016** 6.35 x 0.41 Spade	—	—	Tin Plated Brass	—	—	62751-1	62806-1

[1] Horizontal mount.
[2] .180 [4.57] length — solder legs.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Printed Circuit Board Tabs and Receptacles (Continued)

187 Series
Printed Circuit Board Tabs

Stock Thickness — .020 [0.51]



A



B

Type	Board Thickness	Dimensions T	L	E	H	Material and Finish	UL	CSA	Terminal Part No.
A	**.062** 1.57	—	**.545** 13.84	**.250** 6.35	—	Tin Plated Brass	X	X	61907-1[1]
B	**.062** 1.57	**.250** 6.35	**.332** 8.43	**.250** 6.35	**.303** 7.70	Pre-Tin Brass	X	X	62221-1[2]

[1] Loose piece only.
[2] Insertion equipment available.



Tab Thickness	Board Hole Size	Dimensions L	M	H	Material and Finish	UL	CSA	Terminal Part No. Strip[2]	Loose Piece
.032 0.81	**.053-.057** 1.35-1.45	**.487** 12.37	**.362** 9.19	**.280** 7.11	Tin Plated Brass	X	X	63525-1[1]	1217057-1[1]
.020 0.51	**.050-.054** 1.27-1.37	**.487** 12.37	**.362** 9.19	**.285** 7.24	Tin Plated Brass	X	X	63603-1	1217131-1
		.440 11.18	**.315** 8.00	**.312** 7.92	Tin Plated Brass	X	X	63838-1	—

[1] Dimple.
[2] Insertion equipment available.

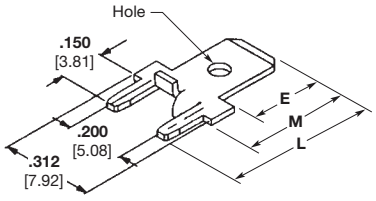

Tab Thickness	Dimensions L	E	M	Material and Finish	UL	CSA	Terminal Part No. Strip[3]	Loose Piece
.032 0.81	**.490** 12.45	**.250** 6.35	**.340** 8.64	Tin Plated Brass	X	X	63860-1[1]	—
					X	X	1217133-1	—
	.510 12.95	**.250** 6.35	**.370** 9.40	Tin Plated Brass	X	X	1742361-1	—
	.710 18.03	**.470** 11.94	**.560** 14.22	Tin Plated Brass	X	X	1217124-1	—
	.635 16.13	**.395** 10.03	**.485** 12.32	Tin Plated Brass	X	X	—	1217332-1[2]
.020 0.51	**.490** 12.45	**.250** 6.35	**.340** 8.64	Tin Plated Brass	X	X	63823-1	63982-1
	.510 12.95	**.250** 6.35	**.370** 9.40	Tin Plated Brass	X	X	1742362-1	—

[1] Dimple.
[2] No hole or dimple.
[3] Insertion equipment available.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11
Page Revised 9-14
www.te.com

Dimensions are shown for reference purposes only
Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Printed Circuit Board Tabs and Receptacles (Continued)

187 Series Printed Circuit Board Tabs
(Continued)

Right-Angle Printed Circuit Board Tabs

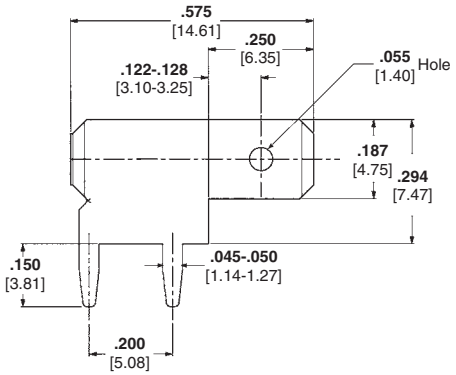

Stock Thickness	Board Hole Size	Material and Finish	UL	CSA	Terminal Part No.
.032 0.81	**.053-.057** 1.35-1.45	Tin Plated Brass	X	X	1217061-1
			—	—	1217756-1[1]
.020 0.51	**.050-.054** 1.27-1.37	Tin Plated Brass	X	X	1217062-1
			—	—	1217156-1[1]

[1] Loose piece.

Tab Caps 187 and 250 Series



Tab Size	Material	UL 94[1]	Color	Dimensions		Insulator Part No.
				T	W	
"187" Series .020 [0.51] Thick	Nylon	V2	Natural	**.320** 8.13	**.260** 6.60	360041-1
"250" Series .032 [0.81] Thick	Nylon	V2	Natural	**.380** 9.65	**.320** 8.13	360042-1

[1] Flammability rating.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Printed Circuit Board Tabs and Receptacles (Continued)

.110 Series Printed Circuit Board Tabs

Stock Thickness — .020 [0.51]

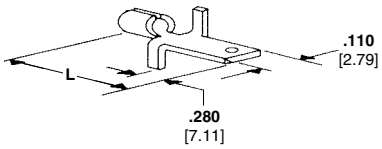

A



B



C



D

Style	Mating Hole Diameter	Dim. L	Material and Finish	UL	CSA	Terminal Part No.
A	**.060-.055** 1.52-1.40	**.490** 12.45	Tin Plated Brass	X	X	61134-3[1]
B	**.067-.063** 1.70-1.60	**.485** 12.32	Tin Plated Brass	X	X	61968-1[2]
				X	X	62437-1[1]
C	**.044-.048** 1.12-1.22	**.490** 12.45	Tin Plated Brass	X	X	62395-1[2]
		.622 15.80	Tin Plated Brass	X	X	63756-1[2,3]

[1] Loose piece only.
[2] Insertion machine available.
[3] .032 [0.81] stock.
[4] .060 [1.52] tab width.

Right-Angle Printed Circuit Board Tabs

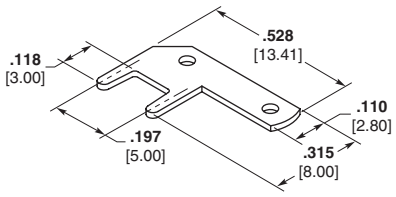

Tab Thickness	PCB Hole Dia. +0/-.01 [+0/-.03]	Material and Finish	UL	CSA	Terminal Part No.
.032 0.81	**.055** 1.40	Tin Plated Brass	—	—	725963-2
.020 0.51	**.051** 1.30	Tin Plated Brass	—	—	725996-2

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Printed Circuit Board Tabs and Receptacles (Continued)

FASTON RAST 5 Tab Header Assembly, 250 Series

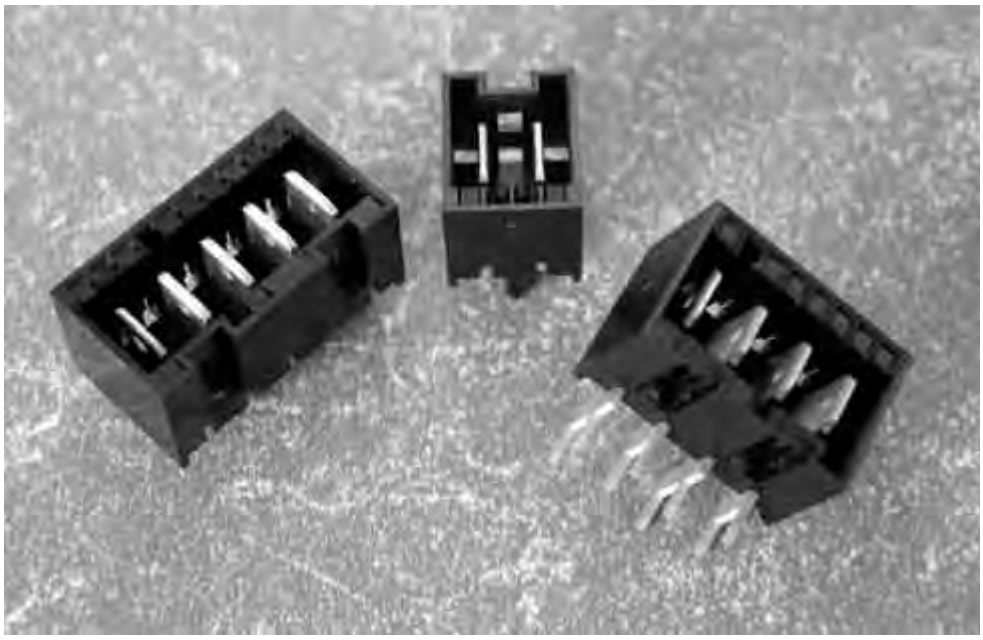

Product Facts

- **.250 x .032 [6.3 x 0.8] FASTON Tabs built on 5 mm centerlines**
- **Shrouded header assembly that conforms to the European RAST 5 Standard**
- **Mating TE connector families include Positive Lock RAST 5 connector system, AMP standard timer RAST 5, AMP multifitting, AMP multifitting MKII, AMP MONO-SHAPE TAB MKI, and AMP MONO-SHAPE MKII**
- **Vertical and right-angle versions available in 2 through 8 positions**
- **Tin plated brass tabs are standard, silver plated tab versions are available upon request**
- **Lead free design is RoHS and ELV compliant**
- **UL 94 V-0 housing meets Glow Wire IEC 60695-1 Section 30.2.3 – 750° No Flame**
- **Component recognition USR and CSR under file no. E28476**
- **VDE tested according to DIN EN61984 (VDE0627): 2002-09; EN61984: 2001 VDE reg. no. B718**

The FASTON RAST 5 Tab header assembly system is designed to provide a RAST 5 interface to a printed circuit board. The RAST 5 standard defines and standardizes the connector mating interface. 250 series tabs are placed on 5mm center lines with a plastic shroud that has keying, polarization, and locking features that help prevent mismating of the corresponding RAST 5 female receptacle housing. The header assembly is designed to accept any RAST 5 compliant female receptacle system or individual quick connects.

The most common application for this product is for household appliance controls where OEMs want to minimize the possibility of crossed wires. It is also suited for other applications such as gaming, vending, and exercise equipment controls as well as residential, commercial and industrial HVAC and light industrial equipment. The system comes fully assembled and is easily press fit into the board for the soldering operation. Preassembly of the tabs into the header ensures tab perpendicularity to the board. The solder leg PCB layout is based on the industry standard for similar systems available on the market. To further enhance correct placement onto the board, the vertical system includes a plastic post which allows header placement to be polarized.

Material
UL 94 V-0, 6/6 Nylon

See TE Catalog 1654742 for the complete line of RAST products.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Printed Circuit Board Tabs and Receptacles (Continued)

FASTON RAST 5 Tab Header Assembly, 250 Series
(Continued)



Vertical Orientation



Right-Angle Orientation

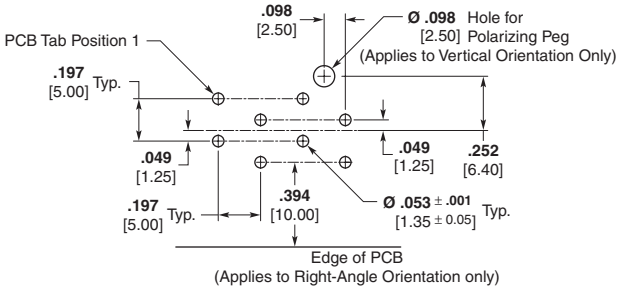

PCB Layout
(Ref.) from Component Side

No. of Positions	RAST 5 Configuration	Dim. A	Part Numbers	
			Vertical	Right-Angle
2	02-A	.484 [12.30]	521382-2	521384-2
	02-C	.484 [12.30]	2-521382-2	2-521384-2
	02-E	.484 [12.30]	3-521382-2	3-521384-2
	02-I	.484 [12.30]	5-521382-2	5-521384-2
3	03-A	.681 [17.30]	521382-3	521384-3
	03-B	.681 [17.30]	1-521382-3	1-521384-3
	03-D	.681 [17.30]	2-521382-3	2-521384-3
	03-K	.681 [17.30]	4-521382-3	—
4	04-A	.878 [22.30]	521382-4	521384-4
	04-B	.878 [22.30]	1-521382-4	1-521384-4
	04-F	.878 [22.30]	3-521382-4	3-521384-4
	04-G	.878 [22.30]	4-521382-4	4-521384-4
5	05-B	1.075 [27.30]	521382-5	521384-5
6	06-A	1.272 [32.30]	521382-6	521384-6
	06-D	1.272 [32.30]	1-521382-6	1-521384-6
7	07-C	1.469 [37.30]	521382-7	521384-7
8	08-D	1.665 [42.30]	521382-8	521384-8
	08-C	1.665 [42.30]	2-521382-8	2-521384-8

Refer to the TE Customer Drawing for additional details and specific keying patterns.
For more information related to the RAST 5 Standard, see TE Literature Distribution no. 1308243.

Available variations include: silver plated tabs, DIN style tabs, and Glow Wire housings.

RAST 5 headers mate to the following product families: AMP multifitting MKII, RAST 5 Positive Lock MKIII, AMP Standard Timer and AMP Standard Power Timer.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Housings

Product Facts

- **Straight, right-angle, multiple position and special application housings available**
- **Various materials and temperature ratings available**
- **Accept FASTON receptacles**
- **Special application housings include microswitch, gas valve, wax motor and water valve housings**
- **Available in .312, .250, .205, .187 and .110 Series**
- **Translucent plastic insulating sleeves in both straight and flag configurations**



FASTON housings are designed to be used with the FASTON terminal line. They come in sizes ranging from .312, .250, .205, .187 and .110 and are available in multiple positions and configurations. Included in this line are special connectors, including water valve connectors, microswitch connectors, gas valve connectors, and various other special application connectors. Many of these housings are available in both V-2 and V-0 rated materials. Translucent plastic insulating sleeves are available for use with FASTON receptacles and flags.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Housings (Continued)

AMPIP Post-Insulation Pods

Flag Style
Receptacle Housings



A
.250 Series



B
.250 Series



C
.187 Series



D
.110 Series

Style	Material	UL 94[1]	Color	Insulation Dia. Max.	Dimensions L	T	W	H	Part Number	Type	Accepts Terminal	UL	CSA
A	Nylon	V2	Natural	.210 5.33	.787 19.99	.266 6.76	.448 11.38	.360 9.14	1-480298-0	Continuous Strip	"250" Series Flag FASTON Tab-Lok Receptacles 41531, 41532, 42511, 61156, 63445	X	X
									1-480307-1	Loose Piece			
		V0	Natural						1-480307-7				
		V2	Nat. 150°						1-480307-6				
		V2	Natural						1-480307-8[3]			—	—
B	Nylon	V2	Natural	.140 3.56 or (2) .110 2.79	.732 18.59	.180 4.57	.460 11.68	.315 8.00	1-480296-0	Continuous Strip	"250" Series Flag FASTON Commercial Receptacle 60290, 60736, 62418	X	X
									1-480306-1	Loose Piece			
C	Nylon	V2	Natural	.175 4.45	.699 17.75	.230 5.84	.430 10.92	.320 8.13	1-480487-2	Loose Piece	"187" Series Tab-Lok Flag FASTON[2]	X	X
		V	Natural						1-480487-4[3]			—	—
D	Nylon	V2	Natural	—	.550 13.97	.205 5.21	.225 5.72	.200 5.08	360040-1	Loose Piece	"110" Series FASTON 61070, 61481, 62336	X	X

[1] Flammability rating of plastic material. [2] Does not accept commercial series. [3] Material according to IEC 60335-1.

Straight Style
Receptacle Housing

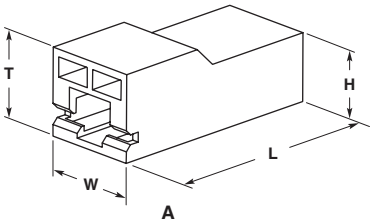

A
.312 Series



B
.250 Series

Style	Type	Material	UL 94[1]	Color	Insulation Dia. Max.	Dimensions L	T	W	H	Part Number	Accepts Terminal	UL	CSA
A	Loose Piece	Nylon	V0	Black	.200 5.08	1.035 26.29	.400 10.16	.440 11.18	.310 7.87	1969186-1	"312" Series FASTON Receptacles	X	X
			V2	Natural						1969186-2			
B	Loose Piece	Nylon	V2	Natural	.260 6.60	.961 24.40	.181 4.60	.358 9.10	.314 8.00	171706-1	"250" Series FASTON Receptacles[3]	X	X
			V2	Natural	.224 5.69	1.03 26.20	.225 6.70	.490 12.40	.285 7.20	521053-1		—	—
			V2	Natural	.200 5.08	.920 23.37	.280 6.60	.390 9.91	.298 7.57	1-480416-0		X	X
			V0	Natural						1-480416-7			
			V2	Natural 150°						1-480416-8			
				Black						1-480416-1			
				Natural						2-480416-2[2]		—	—
			V2	Natural	.187 4.75	.995 25.30	.193 4.90	.354 9.00	.252 6.40	280232		—	—
			V0	Natural	.187 4.75	.995 25.30	.193 4.90	.354 9.00	.252 6.40	280232-6		—	—
			V2	Natural	.169 4.30	.960 24.40	.181 4.60	.366 9.30	.209 5.30	336369-1		X	—
		Polypropylene	HB	Clear	.161 4.10	.960 24.40	.181 4.60	.362 9.20	.209 5.30	735075		X	—

[1] Flammability rating of plastic material. [2] Material according to IEC 60335-1.
[3] Contact product engineering for terminal recommendations when using these insulators with 10 AWG.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Housings (Continued)

AMPIP Post-Insulation Pods (Continued)

Straight Style
Receptacle Housing (Continued)



C
.250 Series



D
.205/.187 Series



E
.110 Series

Style	Type	Material	UL 94[1]	Color	Insulation Dia. Max.	Dimensions L	T	W	H	Part Number	Accepts Terminal		
C	Loose Piece	Nylon	V2	Natural	**.125** 3.18	**.955** 24.26	—	**.570** 14.48	**.190** 4.83	1-480458-0	"250" Series FASTON Economy Receptacles 42660, 42743, 42845, 61202	X	X
D	Loose Piece	Nylon	V2	Natural	**.180** 4.57	**.775** 19.69	**.225** 5.72	**.338** 8.59	**.245** 6.22	1-480418-0	"205" Series FASTON Receptacles 42197, 42198, 42710, 42712, 42713, 60904	X	X
				Natural	**.170** 4.32	**.775** 19.69	**.215** 5.46	**.308** 7.82	**.235** 5.97	1-480435-0	"187" Series FASTON Receptacles 42373, 42374, 42452, 42453, 42617, 60487, 60573, 62137, 62138, 62187, 63475, 63477	X	X
										1-480435-5[2]		—	—
E	Loose Piece	Nylon	V2	Natural	**.150** 3.81	**.790** 20.07	—	**.235** 5.97	**.240** 6.10	1-480417-0	"110" Series FASTON Receptacles 42067, 42068, 42236, 42398, 42399, 42415, 60118, 60197, 60577, 60601, 60729, 61158, 61400, 61457, 61818, 62050, 62094, 62191, 62345	X	X
				Black	**.150** 3.81	**.790** 20.07	—	**.235** 5.97	**.240** 6.10	1-480417-1			

[1] Flammability rating of plastic material.
[2] Material according to IEC 60335-1.

Insulation Sleeves For FASTON Receptacle

Material — Soft Vinyl Chloride Cloudy





Style	FASTON Series	Dimensions D	E	L	W	H	Part Number
A	250	**.079** 2.00	**.748** 19.00	**.945** 24.00	**.315** 8.00	**.138** 3.50	170823-3
		.098 2.50					170823-2
		.126 3.20	**.866** 22.00	**1.06** 27.00	**.315** 8.00	**.138** 3.50	1-170823-8
		.138 3.50	**.787** 20.00	**.984** 25.00	**.315** 8.00	**.138** 3.50	1-170823-5
			1.18 30.00	**1.38** 35.00			1-170823-9
			1.38 35.00	**1.57** 40.00			2-170823-0
		.189 4.80	**.787** 20.00	**.984** 25.00	**.315** 8.00	**.138** 3.50	170823-6
	205	**.098** 2.50	**.709** 18.00	**.906** 23.00	**.256** 6.50	**.118** 3.00	4-170823-1
	187	**.087** 2.20	**.709** 18.00	**.906** 23.00	**.228** 5.80	**.087** 2.20	1-170823-3
		.098 2.50	**.591** 15.00	**.787** 20.00	**.228** 5.80		1-170823-4
	110	**.071** 1.80	**.300** 16.00	**.827** 21.00	**.157** 4.00	**.083** 2.10	170823-9
		.098 2.50					170823-1
B	250	**.126** 3.20	**.571** 14.50	**.728** 18.50	**.335** 8.50	**.177** 4.50	170891-1
		.189 4.80					170891-2
	187	**.126** 3.20	**.488** 12.40	**.587** 14.90	**.256** 6.50	**.118** 3.00	3-170823-8

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Housings (Continued)

Multi-Position Housings

.250 [6.35] Series

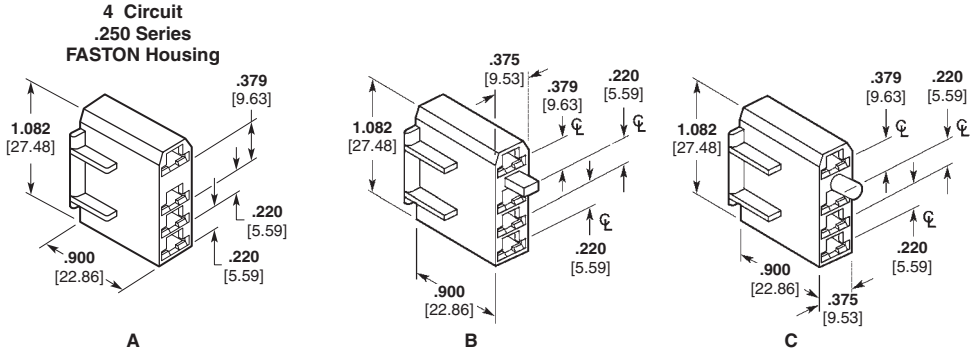

Style	Material	UL 94[1]	Color	Part Number	Accepts Terminals		
A	Nylon	V2	Black	520987-1	.250 Low Insertion Terminals	X	X
			Natural	520987-2		X	X
				520987-6[2]		—	—
		V0	Black	520987-4		X	X
			Natural	520987-5		—	—
B	Nylon	V2	Black	521065-1	.250 Low Insertion Terminals	X	X
C	Nylon	V2	Black	521066-1	.250 Low Insertion Terminals	X	X

[1] Flammability rating of plastic material.
[2] Material according to IEC 60335-1.

Multi-Position Housings

.110 [2.79] Series Ignition Connectors

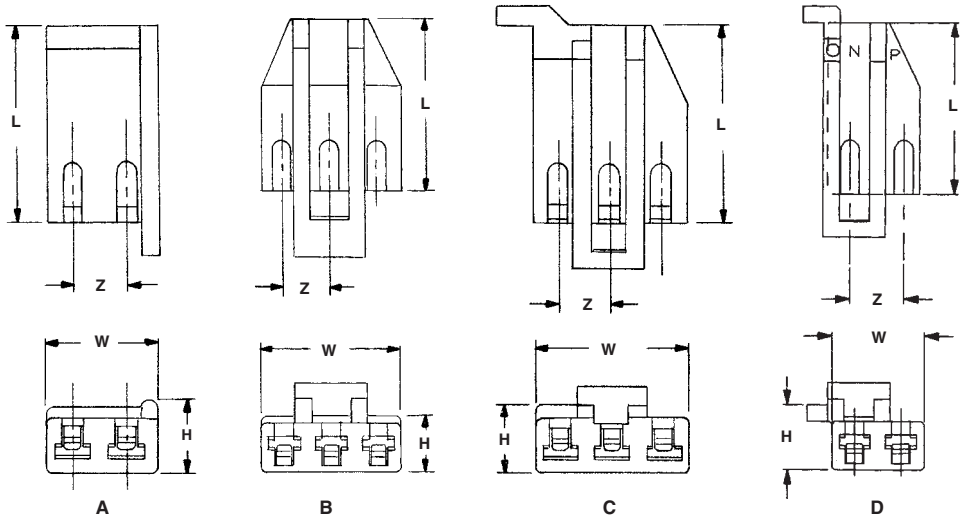

Style	Material	UL 94[1]	Color	Dimensions Z	Dimensions W	Dimensions H	Dimensions L	Part Number	Accepts Terminal[2]		
A	Nylon	V2	Black	**.224** 5.69	**.470** 11.94	**.305** 7.75	**.825** 20.96	520206-2	62942, 63021, 63093	X	X
D	Nylon	V2	Black	**.224** 5.69	**.444** 11.28	**.315** 8.00	**.827** 21.01	520217-2	62942, 63021, 63093	X	X
			Yellow					520217-3			
	Polyester	HB	Natural					520217-4			
B	Nylon	V2	Natural	**.224** 5.69	**.668** 16.97	**.235** 5.97	**.825** 20.96	520219-1	62942, 63021, 63093	X	X
			Black					520219-2			
	Polyester	HB	Black	**.224** 5.69	**.668** 16.97	**.235** 5.97	**.825** 20.96	520219-4			
C	Nylon	V2	Black	**.224** 5.69	**.444** 11.28	**.315** 8.00	**.866** 22.00	520220-2	63093	X	X

[1] Flammability rating of plastic material.
[2] For dimensions see TE customer drawing.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Housings (Continued)

Housings for Special Applications

Appliance Connectors Door Interlock Switch

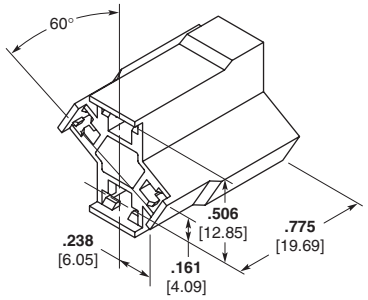

A

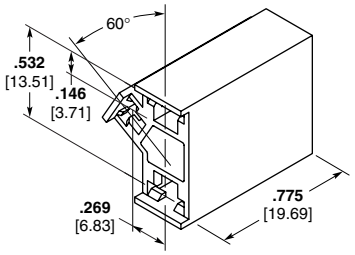

B



C
T-Motor Connector

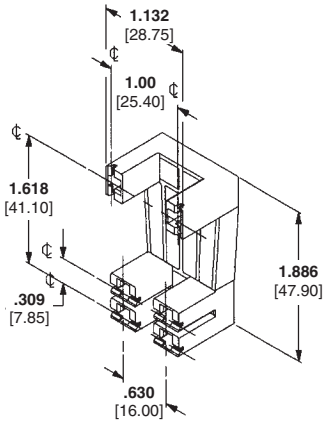

E
Potter & Brumfield Relay Connector



D
T-Motor Connector

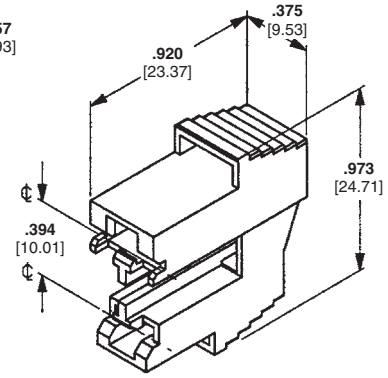

F
Pressure Switch

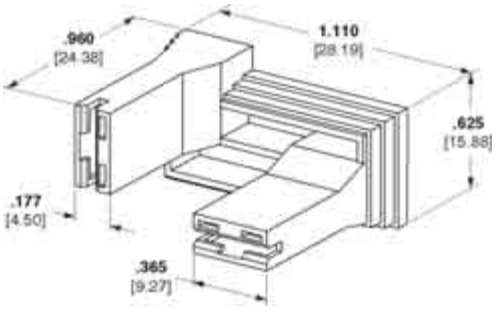

G
T9A Relay Connector



H
RF Relay Connector

Style	Material	UL 94[1]	Color	Part Number	Accepts Terminals		
A	Nylon	V2	Natural 150°C	521251-1	110/187	X	—
B	Nylon	V2	Natural	520978-1	110/187	X	X
			Natural 150°C	520978-2	110/187	X	X
C	Nylon	V2	Natural	521069-1	250 LIF	X	X
D	Nylon	V2	Black	521070-1	250 LIF	X	X
E	Nylon	V2	Black	521140-1	63981-1	X	X
F	Nylon	V2	Black	521148-1	187 LIF/ 250 LIF	X	X
G	Nylon	V0	Natural	521785-1	250 LIF	X	X
H	Nylon	V0	Natural	521771-1	250 LIF	X	X

[1] Flammability rating of plastic material.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Housings (Continued)

Housings for Special Applications (Continued)

Microswitch Connectors



A



B

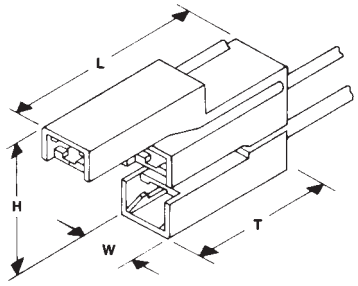

C



D

Style	Type	Material	UL 94[1]	Color	Insulation Dia. Max.	Dimensions L	T	W	H	Part Number	Accepts Terminal		
A	Loose Piece	Nylon	V2	Natural	.157 4.00	1.720 43.70	1.035 26.30	.307 7.80	.520 13.20	174712-1	187 Series MK II Positive Lock Receptacles 170324, 170325, 170326	X	X
			V0	Natural	.157 4.00	1.720 43.70	1.035 26.30	.307 7.80	.520 13.20	1-174712-1			
B	Loose Piece	Nylon	V2	Natural	.157 4.00	1.720 43.70	1.035 26.30	.307 7.80	.770 19.50	172075-1	187 Series MK II Positive Lock Receptacles 170324, 170325, 170326	X	X
			V0	Natural	.157 4.00	1.720 43.70	1.035 26.30	.307 7.80	.770 19.50	1-172075-1			
C	Loose Piece	Nylon	V2	Natural	.170 4.32	1.655 42.04	.845 21.46	.317 8.05	.875 22.23	520212-1	187 Series FASTON Receptacles 42373, 42374, 42452, 42453, 42617, 60487, 60573, 62137, 62187	X	X
				Red						520212-2			
			V0	Natural						520212-3			
			V2	Natural	.170 4.32	1.405 35.69	.845 21.46	.317 8.05	.875 22.23	360010-1			
										360010-5[2]		—	—
			V0	Natural						360010-2		X	X
D	Loose Piece	Nylon	V0	Natural	.195 4.95	1.500 38.10	.981 24.92	.370 9.40	.536 13.61	521955-1	250 Series MK III Positive Lock Receptacles 63993, 63854, 1217092	X	X

[1] Flammability rating of plastic material.
[2] Material according to IEC 60335-1.

Gas Valve Connectors



A



B

Style	Material	UL 94	Color	Part Number	Accepts Terminal		
A	Nylon	V2	Natural	521306-1	1217345-1	X	X
B	Nylon	V2	Natural	521307-1	1217345-1	X	X

Wax Motor Connector



A

Style	Material	UL 94	Color	Part Number	Accepts Terminal		
A	Nylon	V0	Natural	521766-1	250 Series FASTON and Positive Lock Mark III Terminals. Examples include 63306 and 63854.	X	X

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Housings (Continued)

250 Series
Water Valve Coil Connector

This connector is designed to mate with the appliance industry's standard water valve coil. The connector is suitable for such applications as washing machine mixing valves, dishwasher fill valves, and refrigerators with automatic ice makers. The housing has a unique internal cavity design to accommodate either two Positive Lock or two budget and LIF FASTON receptacles.

Product Facts

- **Helps prevent terminal back-out of housing through plastic retention feature**
- **Higher disengagement forces possible with Positive Lock or Low Insertion Force (LIF) FASTON receptacles (hole required in mating tab)**
- **Recognized under the Component Program of Underwriters Laboratories, Inc., File Nos. E28476 and E13288.**

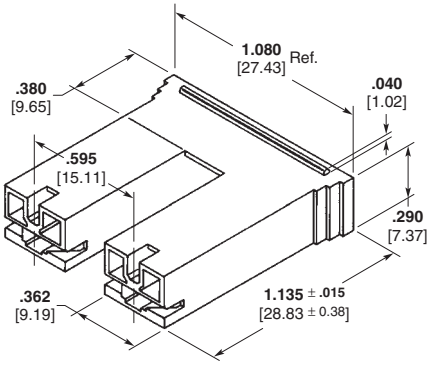

A

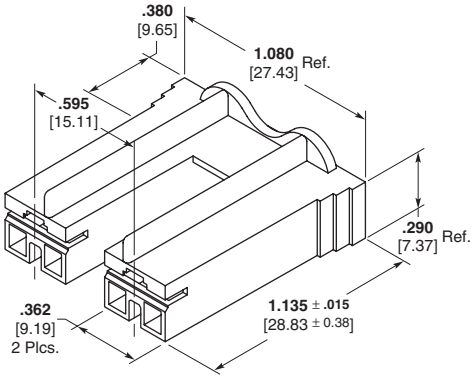

B

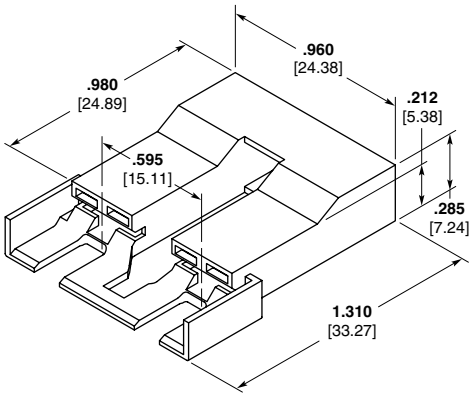

C

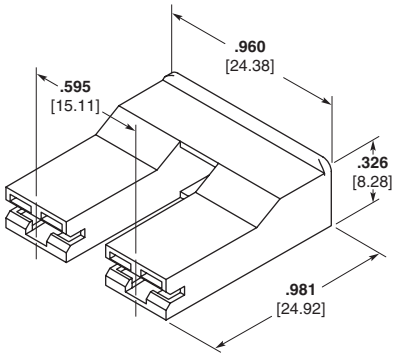

D

Style	Material	UL 94[2]	Color[4]	Part Number	Accepts		
A	Nylon	V2	Natural	520935-1	250 Series FASTON and Positive Lock Mark II Terminals. Examples Include 42400, 42510, 63306, 63097[1], 63119[1], 63239[1], and 170328[1]	X	X
			Red	520935-2			
			Black	520935-3[3]			
			Green	520935-4			
			Blue	520935-5			
			Yellow	520935-6			
			Brown	520935-7			
		V0	Natural	1-520935-1		X	X
			Red	1-520935-2			
			Blue	1-520935-5			
B	Nylon	V0	Natural	521229-1		X	—
			Red	521229-2			
C	Nylon	V2	Natural	521253-1	250 Series FASTON and Positive Lock Mark III Terminals. Examples Include 63306 and 63854	X	X
			Red	521253-2		X	X
		V0	Red	1-521253-2		X	X
			Green	1-521253-3		X	X
			Blue	1-521253-7		X	X
D	Nylon	V2	Natural	521119-1		X	X
			Putty	521119-2			
			Blue	521119-4			

[1] For Positive Lock mark II receptacles, refer to pages 78-83.
[2] Flammability rating of plastic material.
[3] Weather resistant material.
[4] Additional colors available.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Housings (Continued)

187 Series Connector

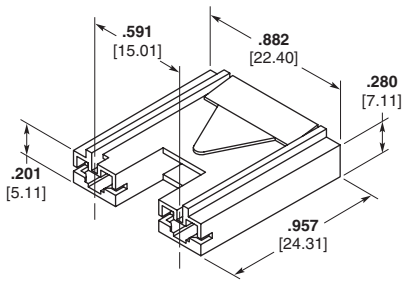

A
15mm Centerline

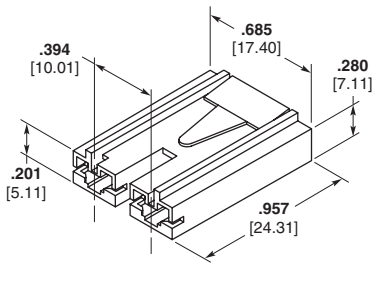

B
10mm Centerline

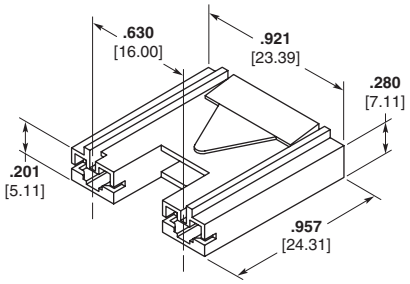

C
16mm Centerline

Style	Material	UL 94	Color	Part Number	Accepts Terminals
A	Nylon	V0	Natural	176498-1	170324, 170325, 170326
			Black	176498-2	
			Yellow	176498-4	
			Blue	176498-6	
B	Nylon	V0	Natural	179720-1	170324, 170325, 170326
			Black	179720-2	
			Yellow	179720-4	
			Blue	179720-6	
			Red	179720-7	
C	Nylon	V0	Natural	353148-1	170324, 170325, 170326
			Yellow	353148-4	
			Green	353148-5	
			Blue	353148-6	

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTIN-FASTON Product Line

Product Facts

- **Used for single and multiple connections**
- **Receptacles and tabs available for 6.3, 4.8 and 2.8 mm size (.250 – .187 and .110 Series)**
- **Receptacles mate with 0.5 and 0.8 thick tabs**
- **IEC 60335-1, Glow Wire 750° No Flame housings available**
- **RoHS Compliant**

Material and Finish

Contacts — Brass, and phosphor bronze base material. Tin and nickel plated products available

Housings — Polyamide UL 94 V2 and UL 94 V0

Technical Documents

Application Specifications

114-2025 FASTIN-FASTON Product Line



TE FASTIN-FASTON connectors offer the advantage of the FASTON receptacles technology in multiple applications. In wiring harnesses, they are mainly used as multiposition and coupling connectors. Up to 8 position connectors can be mated in one operation with a maximum of 20 leads terminated.

Locking Contacts

Receptacles and tabs in this version comply fully with the FASTON receptacles product technology. The only difference is the addition of a locking lance, which helps ensure firm retention of contacts when snapped into housings. Wiring harnesses prefabricated with male or female connectors can be easily connected to mating counterparts, even if manufacturing occurred at a different site. Any application of this technology leads to essential time savings in final assembly.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTIN-FASTON Product Line (Continued)

250 Series (6.3 mm)

Single Position Connectors (Housings)



A — Receptacle Housing



B — Tab Housing



C — Receptacle Housing



D — Tab Housing

Style	Material	Color	UL 94	Note	Part Number	UL	CSA
A	Nylon	Natural	V2	—	480054-3	X	X
		Black	V2	—	480054-4	X	X
		Red	V2	—	480054-5	X	X
		Natural	V0	—	521290-1	X	X
B	Nylon	Natural	V2	—	480053-3	X	X
		Black	V2	—	480053-4	X	X
		Red	V2	—	480053-5	X	X
		Natural	V0	—	521289-1	X	X
C	Nylon	Natural	V2	—	521743-1	X	X
D	Nylon	Natural	V2	—	521744-1	X	X

[1] Flammability rating.

250 Series (6.3 mm)

2 Position Connectors



D — Receptacle Housing



E — Tab Housing

Style	Material	Color	UL 94	Note	Dimensions (mm) W	Dimensions (mm) L	Dimensions (mm) H	Part Number	UL	CSA
D	Nylon	Natural	V2	—	.402 10.2	.902 22.9	.654 16.6	180907-0	—	—
		Black	V2	—				180907-5	—	—
		Natural	V0	GWT 750° No Flame				1-180907-0	—	—
E	Nylon	Natural	V2	—	.500 12.7	1.224 31.1	.791 20.1	180908-0	—	—
		Black	V2	—				180908-5	—	—
		Natural	V0	GWT 750° No Flame				880310-8	—	—

250 Series (6.3 mm)

2 Position Connectors



F — Receptacle Housing



G — Tab Housing

Style	Material	Color	UL 94	Note	Dimensions (mm) W	Dimensions (mm) L	Dimensions (mm) H	Part Number	UL	CSA
F	Nylon	Natural	V2	—	.492 12.50	.902 22.9	.394 10.0	180923-0	X	—
		Black	V2	—				180923-5	X	—
		Natural	V0	—				4-180923-0	X	—
G	Nylon	Natural	V2	—	.598 15.2	1.240 31.5	.520 13.2	180924-0	X	—
		Black	V2	—				180924-5	X	—
		Natural	V0	—				4-180924-0	X	—

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTIN-FASTON Product Line (Continued)

250 Series

Receptacles with Mating Dimple (For use with single circuit connectors)

Fits Tab — .032 [0.81]

Stock Thickness — .016 [0.41]

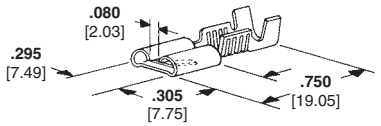

Wire Range AWG	Insulation Diameter	Material and Finish	Terminal Part Number			Quick-Change Applicator No.[2]
18-14	**.100-.170** 2.54-4.32	Brass	42281-1	X	X	687940-2
		Tin Plated Brass	42281-2	X	X	687940-2
		Brass	60634-1[1]	X	X	687940-2
16-12 (2) 16	**.160-.210** 4.06-5.33 (2) **.130** Max. 3.30	Brass	60249-1	X	X	466057-2
		Tin Plated Brass	60249-2	X	X	466057-2
11-10	**.157-.205** 3.99-5.21	Brass	160914-1	—	—	—
		Tin Plated Brass	160914-2	—	—	—

[1] No front slot.
[2] Quick-change applicator for AMP-O-LECTRIC machine 565435-5. For AMPOMATOR machine and other machines not listed, contact TE.

250 Series

Receptacles without Mating Dimple (For use with multiple circuit connectors)

Fits Tab — .032 [0.81]

Stock Thickness — .012 [0.30]

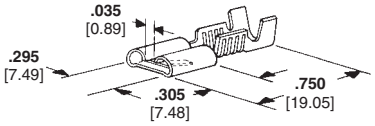

Wire Range AWG	Insulation Diameter	Material and Finish	Terminal Part Number			Quick-Change Applicator No.[1]
22-18	**.085-.125** 2.16-3.18	Tin Plated Brass	60295-2	X	X	687981-2
	.060-.100 1.52-2.54	Tin Plated Brass	60413-1	X	X	687979-3
18-14	**.100-.170** 2.54-4.32	Brass	42100-1	X	X	687932-2
		Tin Plated Brass	42100-2	X	X	687932-2
16-12 or (2) 16	**.160-.210** 4.06-5.33 or (2) **.130** 3.30 Max.	Tin Plated Brass	60253-2	X	X	466058-2
12-10	**.134-.200** 3.40-5.08	Brass	180351-1	—	—	—
		Pre-Tin Plated Brass	180351-2	—	—	—

[1] Quick-change applicator for AMP-O-LECTRIC machine 565435-5. For AMPOMATOR machine and other machines not listed, contact TE.

250 Series

Tabs (For use with single or multiple circuit connectors)

Stock Thickness — .015 [0.38]



A

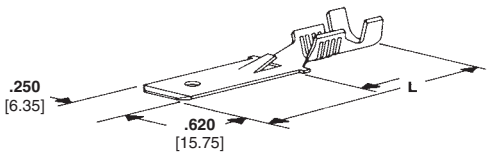

B

Wire Range AWG	Style	Tab Thk.	Insulation Diameter	Dim. L	Material and Finish	Terminal Part No.			Quick-Change Applicator No.[2]
22-18	A	**.032** 0.81	**.085-.125** 2.16-3.18	**1.105** 28.07	Brass	62553-1	X	X	687982-2
					Tin Plated Brass	62553-3	X	X	687982-2
18-14	A	**.032** 0.81	**.100-.170** 2.54-4.32	**1.105** 28.07	Brass	42460-1	X	X	687839-2
					Tin Plated Brass	42460-2	X	X	687839-2
	B	**.016** 0.41	**.120-.145** 3.05-3.68	**1.100** 27.94	Tin Plated Brass	42580-2[1]	X	X	687839-2
14-10	A	**.032** 0.81	**.120-.170** 3.05-4.32	**1.105** 28.07	Tin Plated Brass	60701-1[3]	X	X	466092-2

[1] Used for back-to-back with a combined thickness of .032 [0.81].
[2] Quick-change applicator for AMP-O-LECTRIC machine 565435-5. For AMPOMATOR machine and other machines not listed, contact TE.
[3] 9600 cma max.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTIN-FASTON Product Line (Continued)

250 Series (6.3 mm)
3 Position Connectors



G — Receptacle Housing



H — Tab Housing

Style	Material	Color	UL 94	Note	Dimensions (mm) W	Dimensions (mm) L	Dimensions (mm) H	Part Number		
G	Polyamide	Natural	V2	—	.598 15.2	.902 22.9	.705 17.9	180941-0	—	—
		Black	V2	—				180941-5	—	—
		Natural	V2	GWT 750° No Flame				2-180941-0	—	—
E	Polyamide	Natural	V2	—	.598 15.2	1.252 31.8	.783 19.9	180940-0	—	—
		Black	V2	—				180940-5	—	—
		Natural	V2	GWT 750° No Flame				2-180940-0	—	—

250 Series (6.3 mm)
4 Position Connectors



L — Receptacle Housing



M — Tab Housing

Style	Material	Color	UL 94	Note	Dimensions (mm) W	Dimensions (mm) L	Dimensions (mm) H	Part Number		
L	Polyamide	Natural	V2	—	.909 23.1	.949 24.1	.606 15.4	180900-0	X	—
		Black	V2	—				180900-5	X	—
		Natural	V0	GWT 750° No Flame				2-880110-0	—	—
M	Polyamide	Natural	V2	—	1.031 26.2	1.240 31.5	.650 16.5	180901-0	X	—
		Black	V2	—				180901-5	X	—
		Natural	V0	GWT 750° No Flame				2-626541-0	—	—

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTIN-FASTON Product Line (Continued)

250 Series
6 Circuit Connectors (Housings)



Receptacle Housing



Tab Housing

Material	UL 94[1]	Color	Part Numbers			
			Receptacle	Tab		
Nylon	V2	Natural	480003-5	480004-5	X	X
		Black	1-480281-0[2]	1-480282-0	X	X

[1] Flammability rating.
[2] No mounting ears.

250 Series (6.3 mm)
8 Position Connectors



Q — Receptacle Housing



R — Tab Housing

Style	Material	Color	UL 94	Note	Dimensions (mm)			Part Number		
					W	L	H			
Q	Polyamide	Natural	V2	—	**1.484** 37.7	**.949** 24.1	**.654** 16.6	163007-0	—	—
R	Polyamide	Natural	V2	—	**1.579** 40.1	**1.283** 32.6	**.720** 18.3	163008-0	—	—

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTIN-FASTON Product Line (Continued)

250 Series

2 Circuit "T" Housing

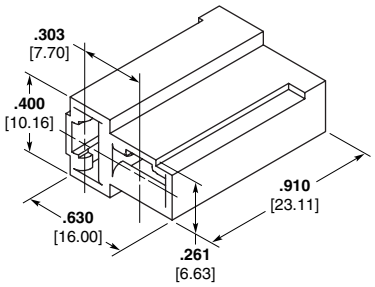

Receptacle Housing

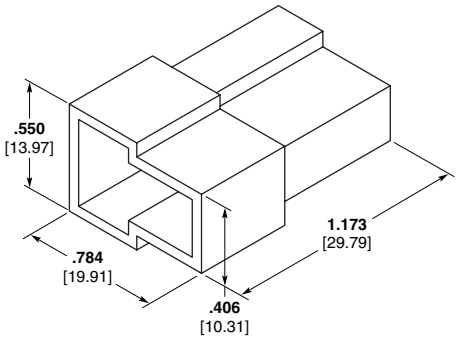

Tab Housing

Material	UL 94[1]	Color	Part Numbers			
			Receptacle	Tab		
Nylon	V2	Black	480115-3	—	—	—
			—	480116-3[2]	X	X

[1] Flammability rating.
[2] For use only with packard style tabs.

Packard Style Receptacles

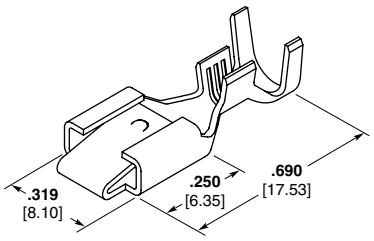

Wire Range AWG	Insulation Diameter	Material and Finish	Terminal Part Number			Applicator No.
20-16	.145 3.68 Max.	Brass	640841-1	—	—	466791-2
18-14	.154 3.91 Max.	Brass	640417-1	—	—	466704-2
		Pre-Tin Plated Brass	640417-2	—	—	466704-2
		Brass	640418-1[1]	—	—	466704-2
		Pre-Tin Plated Brass	640418-2[1]	—	—	466704-2

[1] No Dimple.

Packard Style Tabs

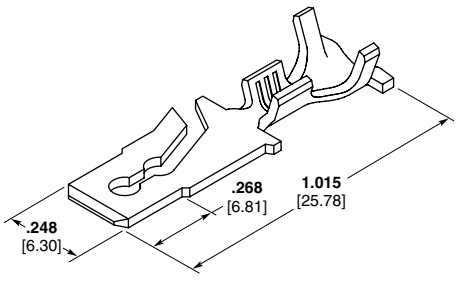

A

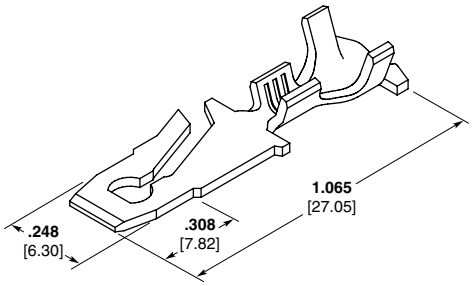

B

Wire Range AWG	Style	Stock Thk.	Insulation Diameter	Material and Finish	Terminal Part Number			Applicator No.
18-14	A	.032 0.81	.100-.142 2.54-3.61	Brass	640416-1	—	—	466707-4
		.032 0.81	.110-.142 2.79-3.61	Tin Plated Brass	640416-2	—	—	466707-4
16-14	B	.032 0.81	.090-.130 2.29-3.30	Tin Plated Brass	60794-2	—	—	687888-6
14-12	A	.032 0.81	.140-.175 3.56-4.45	Tin Plated Brass	1217148-1	—	—	680808-2

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTIN-FASTON Product Line (Continued)

187 Series
Modular Connector Housings

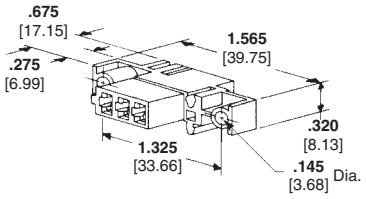

Receptacle Housing

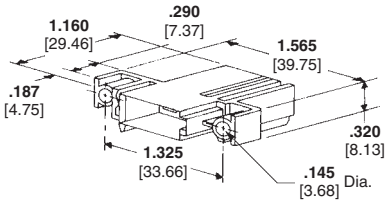

Tab Housing

Material	UL 94[1]	Color	Part Numbers			
			Receptacle	Tab		
Nylon	V2	Natural	1-480252-0	1-480251-0	X	X

[1] Flammability rating.
[2] Special mounting mates with all receptacle housings listed above.

187 Series
Modular Connector Receptacles

Fits Tab — .016 [0.41]
Insulation Diameter — .090-.130 [2.29-3.30] or (2) .110 [2.79] Max.



Wire Range AWG	Stock Thickness	Material and Finish	Terminal Part No.			Quick-Change Applicator No. [1]
20-16 or (2) 20	**.012** 0.30	Pre-Tin Brass	60435-1	X	X	687993-2

[1] Quick-change applicator for AMP-O-LECTRIC machine 565435-5. For AMPOMATOR machine and other machines not listed, contact TE.

187 Series
Modular Connector Tabs

Tab Thickness — .016 [0.41]
Insulation Diameter — .090–.130 [2.29-3.30] or (2) .110 [2.79] Max.

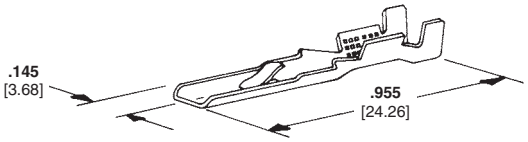

Wire Range AWG	Stock Thickness	Material and Finish	Terminal Part No.			Quick-Change Applicator No. [1]
20-16 or (2) 20	**.016** 0.41	Pre-Tin Brass	60434-1	X	X	687995-2

[1] Quick-change applicator for AMP-O-LECTRIC machine 565435-5. For AMPOMATOR machine and other machines not listed, contact TE.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTIN-FASTON Product Line (Continued)

110 Series
Receptacle Housings

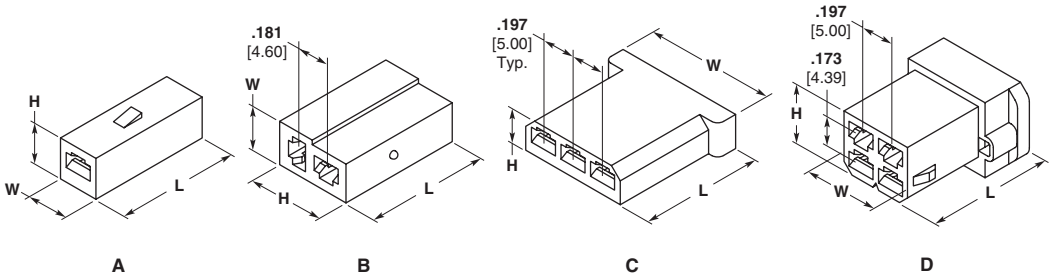

A B C D

Type	Number of Positions	Material	Color	Dimensions W	Dimensions H	Dimensions L	Part Number	UL	CSA
A	1	Nylon	Natural	**.236** 5.99	**.236** 5.99	**.710** 18.01	626062-0	—	—
B	2	Nylon	Natural	**.248** 6.30	**.442** 11.23	**.710** 18.01	626064-0	—	—
C	2	Nylon	Natural	**.551** 14.00	**.200** 5.00	**.710** 18.03	925014-0[1]	—	—
	3	Nylon	Natural	**.748** 19.00	**.200** 5.00	**.710** 18.03	925015-0	—	—
	4	Nylon	Natural	**.945** 24.00	**.200** 5.00	**.710** 18.03	925016-0[1]	—	—
D	4	Nylon	Natural	**.423** 10.74	**.344** 8.74	**.708** 17.98	626056-0	—	—

[1] Not shown.

110 Series
Tab Housings

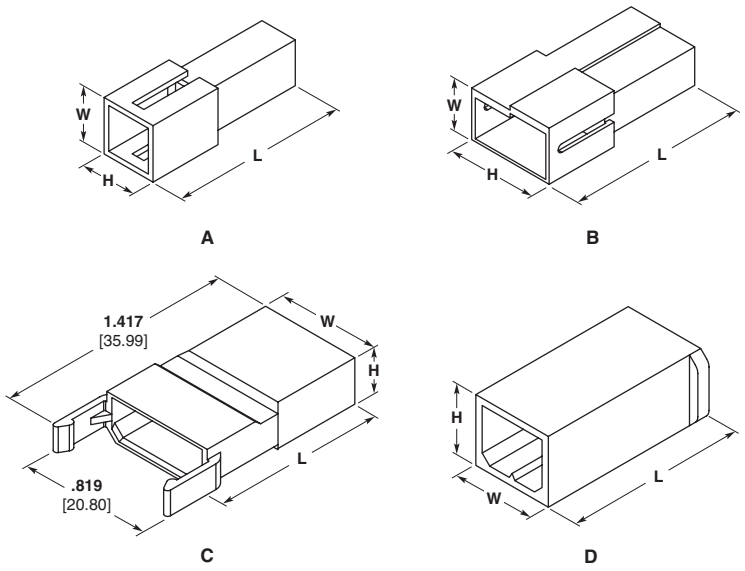

A B C D

Type	Number of Positions	Material	Color	Dimensions W	Dimensions H	Dimensions L	Part Number	UL	CSA
A	1	Nylon	Natural	**.327** 8.31	**.327** 8.31	**1.00** 25.43	626063-0	—	—
B	2	Nylon	Natural	**.264** 6.71	**.516** 13.11	**1.00** 25.43	626065-0	—	—
C	3	Nylon	Natural	**.629** 15.98	**.284** 7.21	**1.08** 27.48	925475-1	—	—
	3	Nylon	Black	**.629** 15.98	**.284** 7.21	**1.08** 27.48	925475-2	—	—
D	4	Nylon	Natural	**.512** 13.00	**.433** 11.00	**1.08** 27.33	626057-0	—	—

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTIN-FASTON Product Line (Continued)

110 Series
Receptacles

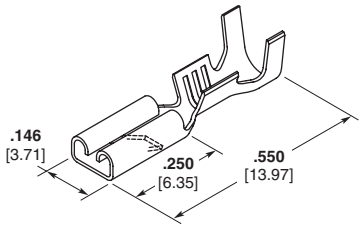

Wire Range AWG	Tab Fit	Insulation Diameter	Material and Finish	Terminal Part No.		
24-20	**.032** 0.81	**.050-.080** 1.27-2.03	Pre-Tin Brass	1217281-2	—	—
22-18	**.020** 0.51	**.080-.120** 2.03-3.05	Pre-Tin Brass	63241-3	—	—
20-16	**.032** 0.81	**.080-.120** 2.03-3.05	Pre-Tin Brass	62572-6	—	—
18-14	**.032** 0.81	**.060-.110** 1.52-2.79	Pre-Tin Brass	1217321-2	—	—

110 Series
Tabs

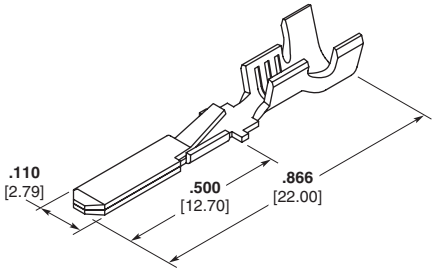

A

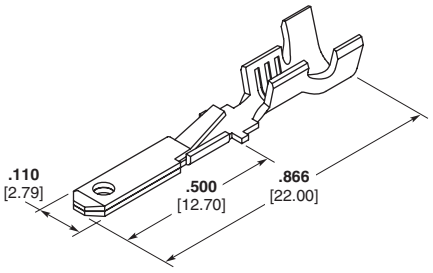

B

Wire Range AWG	Style	Tab Thk.	Insulation Diameter	Material and Finish	Terminal Part No.		
20-16	A	**.032** 0.81	**.090-.120** 2.30-3.05	Tin Plated Brass	160743-4	X	X
	B	**.032** 0.81	**.090-.120** 2.30-3.05	Tin Plated Brass	160762-4	—	—

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTIN-FASTON Product Line — Tab Housings RAST 5

Product Facts

- **Meets IEC 60335-1, Glow Wire 750° No Flame**
- **Accepts TE FASTIN-FASTON tabs 6.3 x 0.8 mm size**
- **Mating TE connector families include AMP MONO-SHAPE, AMP multifitting, AMP standard timer and Positive Lock RAST 5 connector system**
- **Available in different keying and locking versions, from 2 to 10 positions**
- **Available for panel and motor mounting**
- **Provided with secondary locking**
- **RoHS compliant**

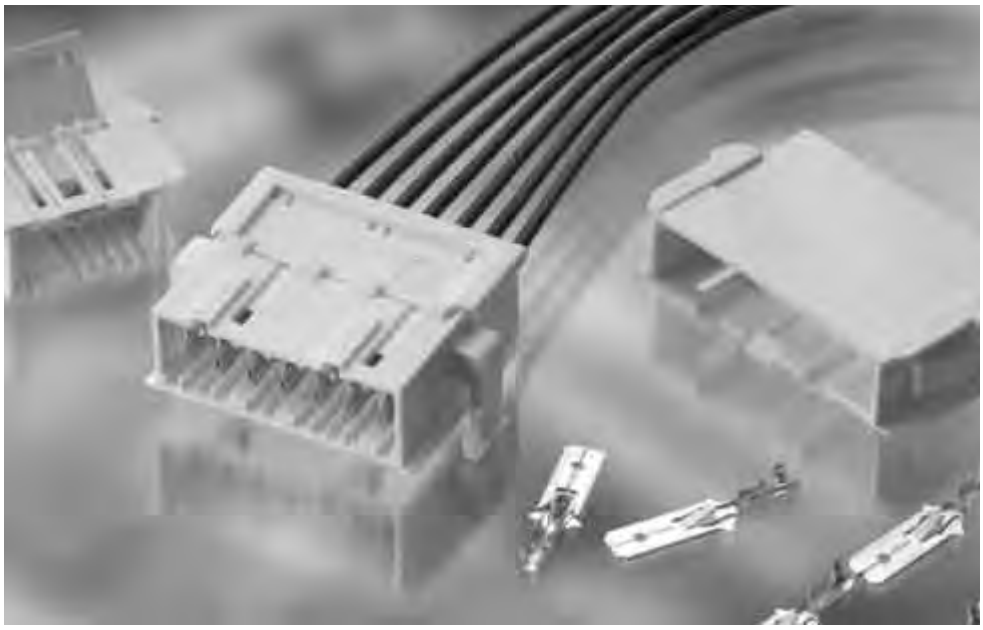

Technical Documents

Product Specifications

108-20256 Panel Mount Housings

108-20247 Panel Mount Housings

The RAST 5 Standard defines and standardizes the connector mating interface. FASTIN-FASTON product line 6.3 mm size tabs are placed into 5 mm centerline cavities and the housings are provided with keying, polarization, and locking features that help prevent mismating of the corresponding RAST 5 interfaces.

The FASTIN-FASTON RAST 5 system is designed to accept the most common TE RAST 5 connector families including AMP MONO-SHAPE, AMP multifitting, AMP standard timer and Positive Lock RAST 5 connector system. The Positive Lock RAST 5 connector system requires the use of a FASTIN-FASTON tab with a special detent hole location to engage the positive locking feature.

The most common application for this product is for household appliance components (motors for washing machines, dishwashers, dryers, refrigerators…) where OEM's want to minimize the possibility of crossed wires.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTIN-FASTON Product Line — Tab Housings RAST 5 (Continued)

Technical Features

① Locking tongue locks with the keying rib of the counter part (see table)

② Locking window locks with locking latches of the counter part (see table)

③ Keying groove

④ Polarization groove

⑤ Cover (secondary locking)

⑥ Panel locking

Ⓐ For panel thickness from 0.8 up to 1.0 mm

Ⓑ For panel thickness from 1.0 up to 2.2 mm

⑦ Tabs 6.3 x 0.8 mm (see table)

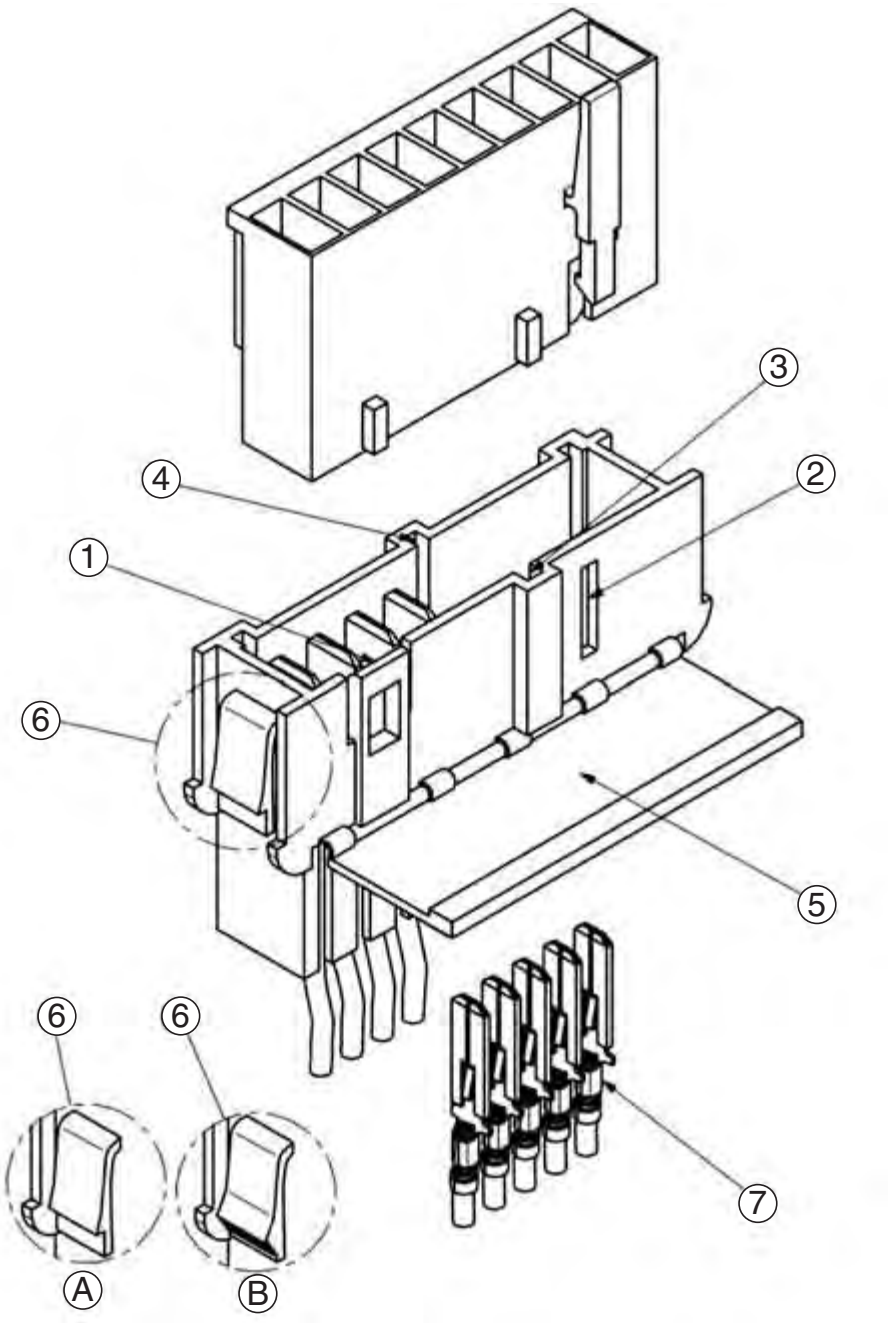

Panel Cut-Outs

Ⓐ

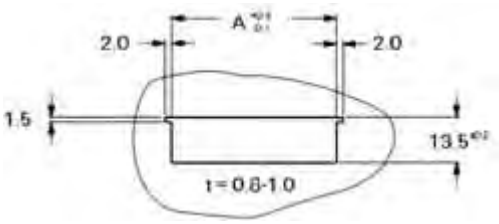

Dimension A = No. of Pos. x 5 + 9.0 mm

Ⓑ

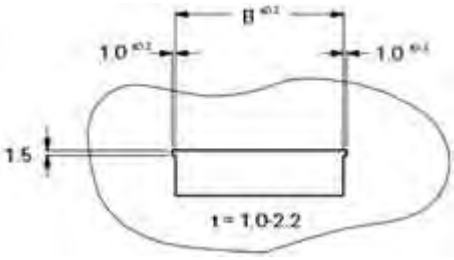

Dimension B = No. of Pos. x 5 + 9.8 mm

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTIN-FASTON Product Line — Tab Housings RAST 5 (Continued)

Panel Mount Housings

Material — Polyamide
Color — Natural



C — with Secondary Locking



D — without Secondary Locking

Positions	RAST 5 Polarizations	Panel Cut-Out	Style	UL 94	Note	Part Number
2		A	C	V2	GWT 750° No Flame	9-927742-2
					—	927742-2
				V0	—	5-927742-2
			D	V2	—	5-293035-2
		B	C	V2	—	964492-2
				V0	—	5-964492-2
3		A	C	V2	GWT 750° No Flame	293008-1
					—	928230-3
		A	C	V2	GWT 750° No Flame	9-927742-3
					—	927742-3
				V0	—	5-927742-3
4		A	C	V2	GWT 750° No Flame	293009-1
					—	293009-2
		A	C	V2	GWT 750° No Flame	9-927742-4
					—	927742-4
5		A	C	V2	GWT 750° No Flame	293011-1
					—	927742-5
		B	C	V2	GWT 750° No Flame	5-964492-5
					—	964492-5
		A	C	V2	GWT 750° No Flame	293010-1
					—	293010-2
		B	C	V2	—	1241857-5
					—	293161-1

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTIN-FASTON Product Line — Tab Housings RAST 5 (Continued)

Panel Mount Housings
(Continued)

Material — Polyamide
Color — Natural



C — with Secondary Locking



D — without Secondary Locking

Positions	RAST 5 Polarizations	Panel Cut-Out	Style	UL 94	Note	Part Number
6		A	C	V2	—	927742-6
				V0	—	5-927742-6
		B	D	V2	GWT 750° No Flame	5-1241967-6
7		A	C	V2	GWT 750° No Flame	293034-1
		A	C	V2	GWT 750° No Flame	293044-1
		A	C	V2	—	927742-7
		A	C	V2	GWT 750° No Flame	284985-1
					—	928309-7
8		A	C	V2	GWT 750° No Flame	284986-1
					—	928309-8
		B	C	V2	GWT 750° No Flame	293043-1
			D	V2	GWT 750° No Flame	5-1241967-8
					—	1241967-8
		A	D	V2	GWT 750° No Flame	5-1241969-8
					—	1241969-8
9		B	D	V2	GWT 750° No Flame	293033-1
10		A	D	V2	GWT 750° No Flame	1-1241968-5
					—	1-1241968-0

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTIN-FASTON Product Line — Tab Housings RAST 5 (Continued)

Motor Mount Housings

Material — Polyamide
Color — Natural



E

Positions	RAST 5 Polarizations	Panel Cut-Out	Style	UL 94	Note	Part Number
7		—	E	V2	GWT 750° No Flame	293014-1
		—	E	V2	GWT 750° No Flame	293015-1
		—	E	V2	GWT 750° No Flame	1-293015-1
8		—	E	V2	GWT 750° No Flame	284861-1
				V0	—	284861-3

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

FASTON Uninsulated Terminals — Loose Piece

FASTON Terminals Strip/Loose Piece Cross Reference

FASTON terminals have been designed for speed of application using selected terminating machines; however, hand tools are also available for those terminals listed.

RECEPTACLES 250 Series

Wire Range AWG	Strip Part No.	Loose Piece Part No.	Description	Hand Tool Part No.
22-18	41772	60878-2	Premier Receptacle	91514-1
	61988-2	62274-1	Receptacle/Tab Combination	91514-1
18-14	41274	41729	Premier Receptacle	90165-1
	41774	42025-1	Hermetic Receptacle	90165-1
	42219-1	60705-1	Premier Receptacle	90165-1
	61944-1	60279-1	Piggyback Receptacle	189508-1
	61944-2	60279-2	Piggyback Receptacle	189508-1
	42100-1	42238-1	FASTIN-FASTON	720725-1 or 91557-1
	42100-2	42238-2	FASTIN-FASTON	—
	42281-1	42282-1	FASTIN-FASTON	90165-1
	42281-2	42282-2	FASTIN-FASTON	—
	60290-2	60419-2	"F" Crimp Flag	90045
18-12	41532	41898	Tab-Lok Flag	47417
	42742-1	60102-1	Tab-Lok Flag	47417
16-12	41728	42021	Premier Receptacle	47094
14-10	41450	61227-1	Premier Receptacle	90120
	62049-2	62090-1	Piggyback	—
12-10	60851-1	60851-3	Hermetic Flag	—

Receptacles 187 Series

Wire Range AWG	Strip Part No.	Loose Piece Part No.	Description	Hand Tool Part No.
20-16	42452-1	42566-1	Premier Receptacle	91509-1
	42452-2	42566-2	Premier Receptacle	91509-1
	42373-2	42638-2	Premier (No Insulation)	—
	60435-1	60520-1	FASTIN-FASTON	90088
	62026-1	62228-1	Piggyback Receptacle	—

Receptacles 110 Series

Wire Range AWG	Strip Part No.	Loose Piece Part No.	Description	Hand Tool Part No.
22-18	42068-1	42470-1	Receptacle	91511-1
	62003-2	62112-2	Receptacle/Tab Combination	—
	60900-1	61454-1	Tab Receptacle	—

250 Series Tabs

Wire Range AWG	Strip Part No.	Loose Piece Part No.	Description	Hand Tool Part No.
22-18	60294-1	61316-1	FASTIN-FASTON	91514-1
18-14	41412	41778	Crimp Type	—
	42460-2	42565-2	FASTIN-FASTON	90165-1

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Positive Lock Receptacles

Product Facts

- **Reduced insertion force**
- **Locks onto tabs containing holes**
- **Housing insulates and serves as a removal tool**
- **"Snap" action tells assembler receptacle is mated properly**
- **Terminated by automatic or semi-automatic equipment**
- **Single and multiple circuit housings available**
- **Recognized under the Component Program of Underwriters Laboratories Inc., File Nos. E66717 and E28476**
- **Certified by Canadian Standards Association File No. LR7189A**

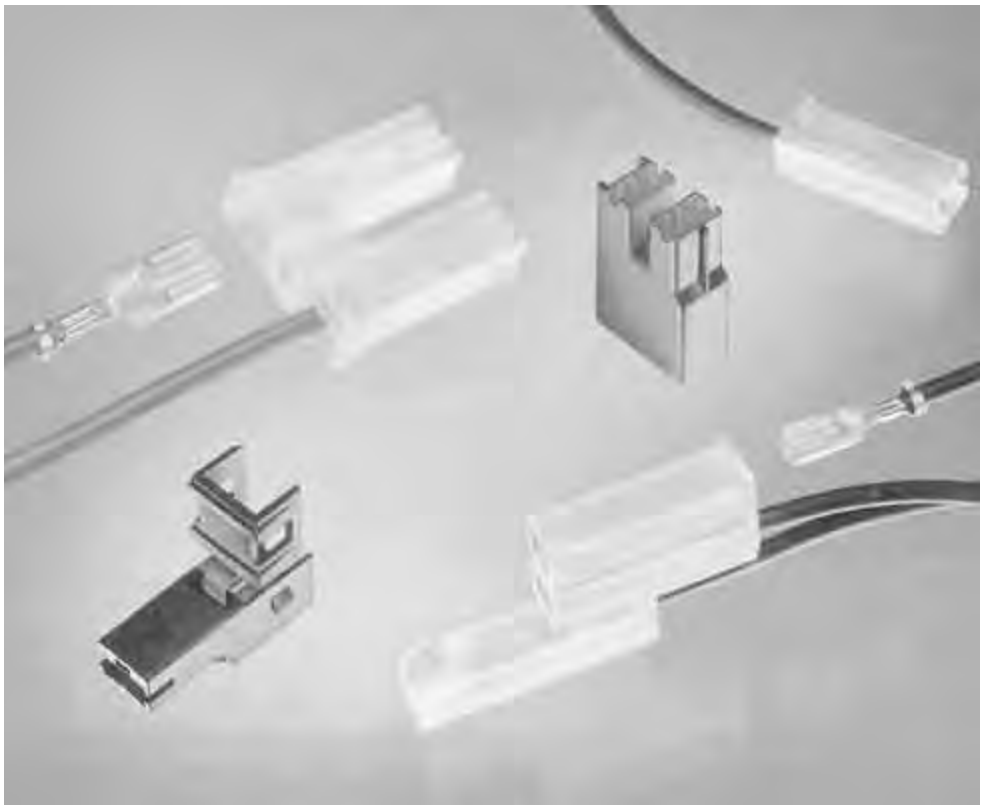

Positive Lock receptacles are specifically designed to provide ease of assembly and secure retention to mating tabs. These unique features are attainable by the reduced insertion force of the product and the locking dimple. The receptacle locks onto mating tabs containing holes and is removable only by deflecting an integrally designed depressor prior to withdrawal. The depressor can be deflected manually by thumb pressure, or automatically by a cam inside a specially designed nylon housing. If the housing is employed, removal of the terminal from the tab is performed by simply applying withdrawal force to the housing. In addition to providing a means of disconnecting the terminal, the housing performs its traditional insulating function.

Aside from reduced insertion forces, Positive Lock receptacles give the assembler a definite mechanical "snap" when the terminal is correctly seated over the mating tab. This facilitates correct assembly in hard-to-reach areas such as under dashboards, recessed switch tabs, etc.

Safety is enhanced by the locking capability of the product. Unless the depressor is deliberately deflected, either manually or by withdrawal force applied directly to the optional housing, a terminal will not easily come off of the tab. Thus, the potential of exposed live parts or disruption of critical circuitry due to improperly seated or accidentally removed terminals is greatly reduced.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Positive Lock Receptacles (Continued)

Mark I

250 Series Receptacles

Stock Thickness — .016 [0.41]

Fits Tab — .032 [0.81]

Recognized under the Component Program of Underwriters Laboratories Inc., UL File No. E28476

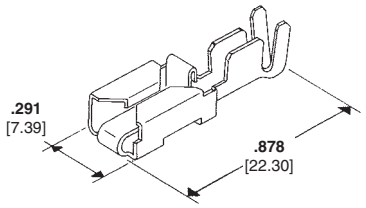

Wire Range AWG	Insulation Diameter	Material and Finish	Part Numbers				
			Receptacle			Quick Change Applicator No.[2]	Hand Tool
20-16	**.090-.130** 2.29-3.30	Brass/Pre-Tin	1-160759-1	X	X	567181-2	654174-1
18-14	**.135-.195** 3.43-4.95	Brass/Tin	63812-1[1]	X	X	680140-2	—
	.095-.155 2.41-3.94	Brass/Tin	154718-3	X	—	466542-3	525651
14-11	**.140-.170** 3.56-4.32	Brass/Tin	154717-3	X	—	466883-2	525651
12-10	**.135-.200** 3.43-5.08	Brass/Pre-Tin	790319-3	—	—	567417-2	—

[1] "A" Style Housing only.
[2] Quick-Change Applicator for AMP-O-LECTRIC Machine 565435-5. For AMPOMATOR Machine and other machines not listed, contact TE.

Receptacle Housings

Material — 94 V-2, 6/6 Nylon

1 Position

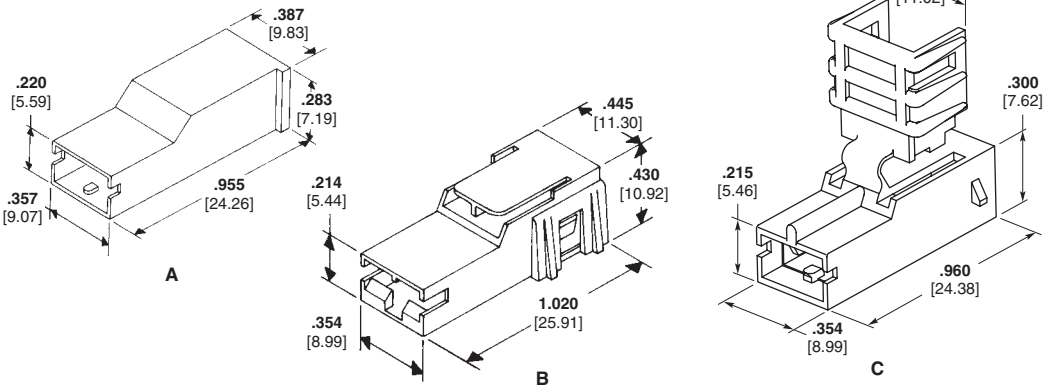

2 Position

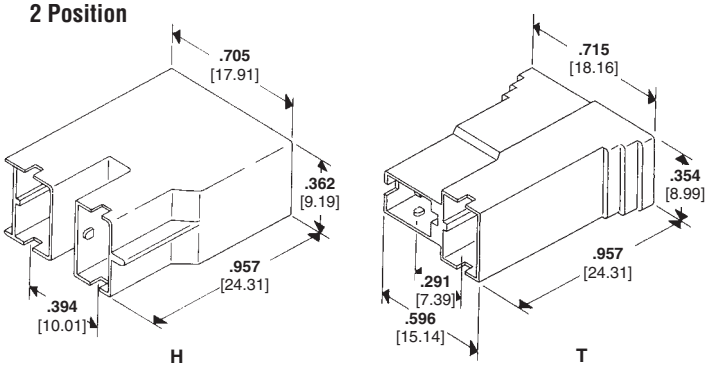

Style	Color	Part No.
A	Black	154719-0
	Natural	154719-1
B	Black	520961-1[1]
C	Black	520895-1[2]
H	Black	926521-2
T	Black	926522-1
	Natural	926522-2

[1] Press-to-release with secondary lock.
[2] Secondary lock.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Positive Lock Receptacles (Continued)

Mark I

250 Series Flag Receptacle

Stock Thickness — .016 [0.41]
Fits Tab — .032 [0.81]

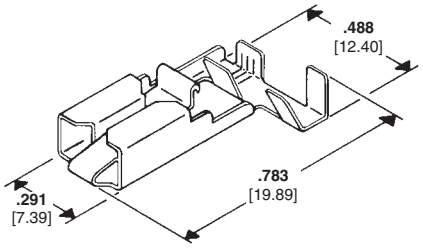

Wire Range AWG	Insulation Diameter	Material and Finish	Part Number
20-15	**.087-.130** 2.21-3.30	Brass/Pre-Tin	926820-4
17-13	**.130-.170** 3.00-4.30	Brass/Pre-Tin	926790-4

Mark I

250 Series Receptacle Housings

Material — 94 V-2, 6/6 Nylon

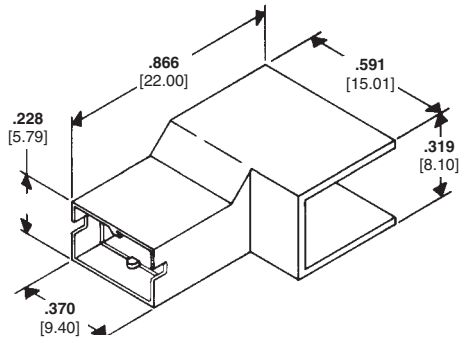

Color	Part Number
Black	926291-1

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Positive Lock Receptacles (Continued)

Mark II
250 Series
Straight Receptacles

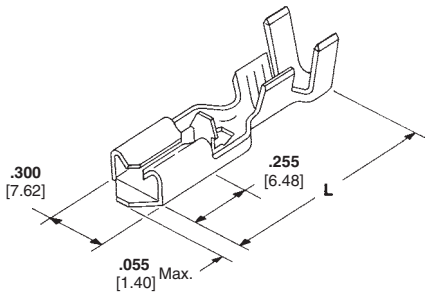

Wire Range AWG	Tab Thickness	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)			Terminal Part No.
22-18	**.032** 0.81	**.059-.122** 1.50-3.10	Pre-Tin Brass	**.016** 0.41	**.976** 24.80	X	X	170327-1
18-16 (2) 18, (2) 20	**.032** 0.81	**.105-.210** 2.67-5.33 or (2) **.105** 2.67 Max.	Brass	**.016** 0.41	**.886** 22.50	—	—	1742354-1
18-14	**.032** 0.81	**.090-.155** 2.29-3.94	Brass	**.016** 0.41	**.886** 22.50	X	X	63097-2
	.025 0.64	**.090-.155** 2.29-3.94	Brass, Tin Plated	**.016** 0.41	**.886** 22.50	X	X	63809-1
	.020 0.51	**.090-.155** 2.29-3.94	Brass, Tin Plated	**.016** 0.41	**.886** 22.50	X	X	63442-1
	.032 0.81	**.090-.135** 2.29-3.43	Pre-Tin Brass	**.016** 0.41	**1.015** 25.80	X	X	170328-1
15-10	**.032** 0.81	**.110-.200** 2.79-5.08	Pre-Tin Brass	**.016** 0.41	**1.015** 25.80	X	X	170329-1
12-10	**.032** 0.81	**.150-.200** 3.81-5.08	Brass, Tin Plated	**.018** 0.46	**.913** 23.20	X	X	63239-1

Mark II
250 Series
Receptacle Housings
1 Circuit



A



B

Style	Material	UL 94	Color			Part Number
A	6/6 Nylon	V2	Natural	—	—	172076-1
			Black	—	—	172076-2
			Yellow	—	—	172076-4
			Green	—	—	172076-5
			Blue	—	—	172076-6
			Red	—	—	172076-7
		V0	Natural	—	—	2-172076-1
			Black	—	—	2-172076-2
			Yellow	—	—	2-172076-4
			Green	—	—	2-172076-5
			Blue	—	—	2-172076-6
			Red	—	—	2-172076-7
B	6/6 Nylon	V0	Natural	X	X	177627-1
			Yellow	X	X	177627-4
			Green	—	—	177627-5
			Blue	—	—	177627-6
			Red	—	—	177627-7
			Black	—	—	177627-9

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Positive Lock Receptacles (Continued)

Mark II
250 Series
Receptacle Housings
2 Circuit

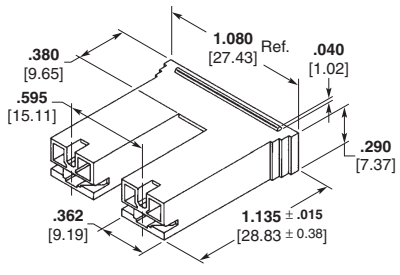

A

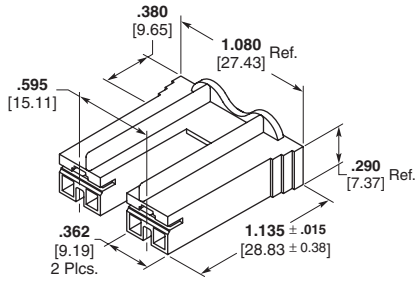

B

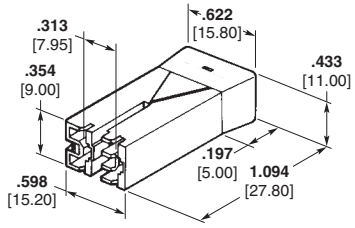

C

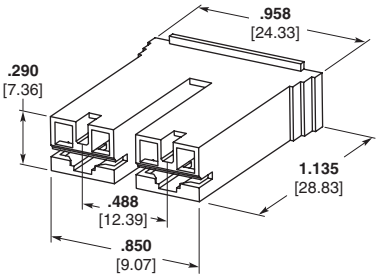

D

Style	Material	UL 94	Color			Part Number
A	6/6 Nylon	V2	Natural	X	X	520935-1
			Red	X	X	520935-2
			Black	—	—	520935-3
			Green	—	—	520935-4
			Blue	—	—	520935-5
			Yellow	—	—	520935-6
			Brown	—	—	520935-7
		V0	Natural	—	—	1-520935-1
			Red	—	—	1-520935-2
			Blue	—	—	1-520935-5
B	6 Nylon	V2	Natural	—	—	1-521229-1[1]
	6/6 Nylon	V0	Natural	X	X	521229-1
			Red	—	—	521229-2
C	6/6 Nylon	V0	Natural	—	—	178833-1
D	6/6 Nylon	V0	Natural	X	X	1969332-2

[1] Housing material to IEC 60695-2-11 Glow Wire temps. 650°C, 750°C, & 850°C.

Mark II
250 Series
Receptacle Housings
4 Circuit

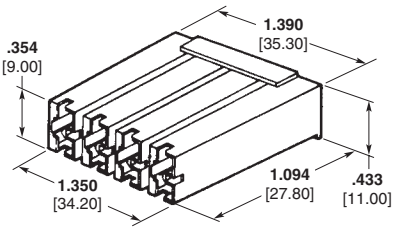

A

Style	Material	UL 94	Color			Part Number
A	6/6 Nylon	V2	Natural	X	X	174429-1

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Positive Lock Receptacles (Continued)

Mark II

250 Series
Flag Receptacles
Stock Thickness — .016 [0.41]
Fits Tab — .032 [0.81]



Wire Range AWG	Insulation Diameter	Material and Finish	UL	CSA	SEV	Terminal Part No.
22-18	**0.59-.110** 1.50-2.80	Pre-Tin Brass	X	—	X	172761-1
18-14	**.110-.205** 2.80-5.20	Pre-Tin Brass	X	—	X	172763-1
12-10	**.110-.205** 2.80-5.20	Pre-Tin Brass	X	—	X	172765-1

Mark II

250 Series
Flag Style Receptacle Housing
1 Circuit

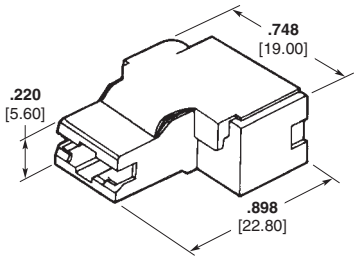

A

Style	Material	UL 94	Color	CSA	SEV	Part Number
A	6/6 Nylon	V2	Natural	X	X	172469-1
		V0	Natural	—	—	1-172469-1
			Blue	—	—	1-172469-2

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Positive Lock Receptacles (Continued)

Mark II
187 Series
Straight Receptacles

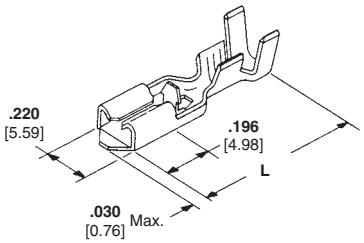

A

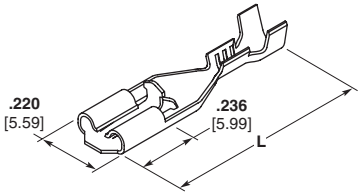

B

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)			Terminal Part No.
24-20	B	**.020** 0.51	**.060-.105** 1.52-2.67	Pre-Tin Brass	**.012** 0.30	**.850** 21.60	X	X	170324-1
		.020 0.51	**.060-.105** 1.52-2.67	Phos. Bronze, Nickel Plated	**.012** 0.30	**.850** 21.60	X	X	170324-2
		.020 0.51	**.060-.105** 1.52-2.67	Pre-Tin Phos. Bronze	**.012** 0.30	**.850** 21.60	—	—	170324-5
	A	**.020** 0.51	**.060-.110** 1.52-2.79	Pre-Tin Brass	**.012** 0.30	**.755** 19.17	X	X	63407-2[1]
20-16	B	**.020** 0.51	**.074-.134** 1.87-3.40	Pre-Tin Brass	**.012** 0.30	**.850** 21.60	X	X	170325-1
		.020 0.51	**.074-.134** 1.87-3.40	Pre-Tin Phos. Bronze	**.012** 0.30	**.850** 21.60	—	—	170325-3
	A	**.020** 0.51	**.090-.130** 2.29-3.30	Brass, Pre-Tin	**.012** 0.30	**.755** 19.17	X	X	63232-1[1]
		.032 0.81	**.060-.110** 1.52-2.79	Brass, Tin Plated	**.012** 0.30	**.740** 18.80	X	X	63498-1[2]
		.032 0.81	**.090-.130** 2.29-3.30	Brass, Tin Plated	**.012** 0.30	**.755** 19.17	X	X	63313-1[1]
18-14 (2) 18	B	**.020** 0.51	**.083-.142** 2.11-3.61 (2) **.216** 5.49	Brass, Pre-Tin	**.012** 0.30	**.850** 21.60	—	—	170326-1

[1] Low profile — not for use in housing.
[2] For use with housing 521125.

Mark II
187 Series
Receptacle Housings
1 Circuit



A — Use with (.187 x .020 [4.74 x 0.51])

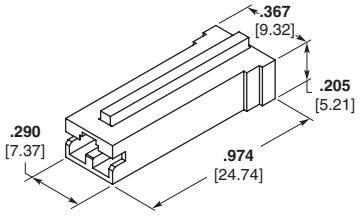

B — Use with (.187 x .032 [4.75 x 0.81])

Style	Material	UL 94	Color			Part Number
A	6/6 Nylon	V2	Natural	X	X	172074-1
			Black	—	—	172074-2
			Yellow	—	—	172074-4
			Green	—	—	172074-5
			Blue	—	—	172074-6
			Red	—	—	172074-7
		V0	Natural	X	X	173974-1
			Black	—	—	173974-2
			Yellow	—	—	173974-4
			Green	—	—	173974-5
			Blue	—	—	173974-6
			Red	—	—	173974-7
B	6/6 Nylon	V2	Natural	—	—	521125-1

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Positive Lock Receptacles (Continued)

Mark II
187 Series
Receptacle Housings
2 Circuit



A — 6 mm Pitch

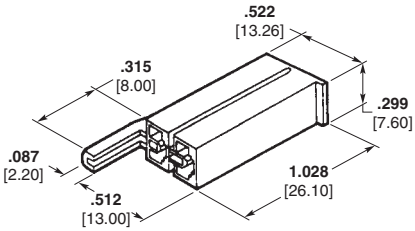

B — 6 mm Pitch, with Polarized Guide



C — 7 mm Pitch

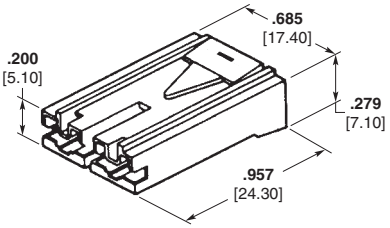

D — 10 mm Pitch

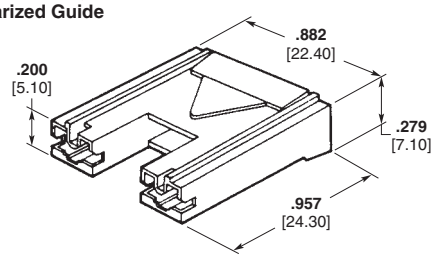

E — 15 mm Pitch, for Electro-Magnetic

Style	Material	UL 94	Color	UL	CSA	Part Number
A	6/6 Nylon	V2	Natural	—	—	172210-1
			Black	—	—	172210-2
			Yellow	—	—	172210-4
			Blue	—	—	172210-6
		V0	Natural	X	X	1-172210-1
			Black	X	X	1-172210-2
			Yellow	—	—	1-172210-4
			Green	—	—	1-172210-5
			Blue	—	—	1-172210-6
			Red	—	—	1-172210-7
B	6/6 Nylon	V2	Natural	X	X	174587-1
		V0	Natural	—	—	1-174587-1
			Yellow	—	—	1-174587-4
			Green	—	—	1-174587-5
			Blue	—	—	1-174587-6
			Red	—	—	1-174587-7

Style	Material	UL 94	Color	UL	CSA	Part Number
C	6/6 Nylon	V2	Natural	X	X	175578-1
			Black	—	—	175578-2
		V0	Natural	—	—	1-175578-1
			Black	—	—	1-175578-2
			Yellow	—	—	1-175578-4
			Blue	—	—	1-175578-6
			Red	—	—	1-175578-7
D	6/6 Nylon	V0	Natural	—	—	179720-1
			Black	—	—	179720-2
			Yellow	—	—	179720-4
			Blue	—	—	179720-6
			Red	—	—	179720-7
E	6/6 Nylon	V0	Natural	X	X	176498-1
			Black	—	—	176498-2
			Yellow	—	—	176498-4
			Blue	—	—	176498-6
	6 Nylon	V2	Yellow	—	—	3-176498-4[1]

[1] Housing material to IEC 60695-2-11 Glow Wire temps. 650°C, 750°C, & 850°C.

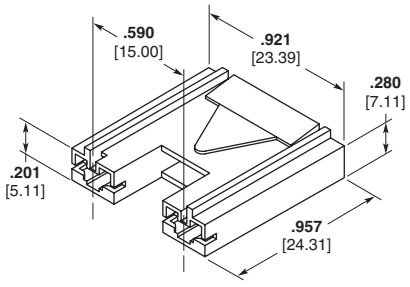

F — 16 mm Pitch

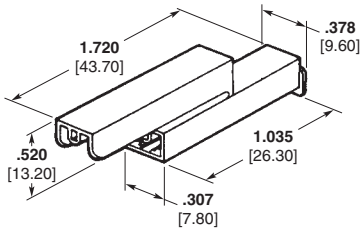

G — For Microswitch

Style	Material	UL 94	Color	UL	CSA	Part Number
F	6/6 Nylon	V0	Yellow	—	—	353148-4
			Green	—	—	353148-5
			Blue	—	—	353148-6
G	6/6 Nylon	V2	Natural	X	X	174712-1
		V0	Natural	—	—	1-174712-1
			Blue	—	—	1-174712-6
			Red	—	—	1-174712-7

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Positive Lock Receptacles (Continued)

Mark II

187 Series
Receptacle Housings

3 Circuit and
4 Circuit

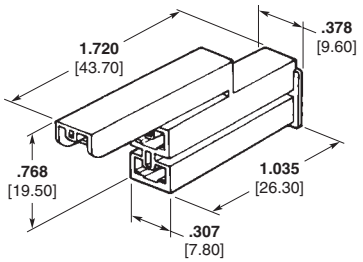

A — 3 Circuit
For Micro-Switch

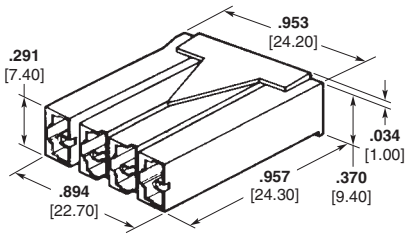

B — 4 Circuit
For Timer

Style	Material	UL 94	Color			Part Number
A	6/6 Nylon	V2	Natural	X	X	172075-1
			Yellow	X	X	172075-4
			Blue	—	—	172075-6
		V0	Natural	—	—	1-172075-1
			Yellow	—	—	1-172075-4
B	6/6 Nylon	V0	Natural	X	X	174513-1

Positive Lock EX

187 Series
Straight Receptacles



Wire Range AWG	Tab Thickness	Insulation Diameter	Material	Stock Thickness	L (Overall Length)			Terminal Part No.
26-20 0.14-0.53	**.020** 0.50	**.050-.140** 1.3-3.6	Stainless Steel	**.012** 0.30	**.675** 17.2	—	—	175032-1
26-16 0.50-1.30	**.020** 0.50	**.090-.140** 2.3-3.6	Stainless Steel	**.012** 0.30	**.675** 17.2	X	—	1742669-1
20-14 0.50-2.20	**.020** 0.50	**.075-.173** 1.9-4.4	Stainless Steel	**.012** 0.30	**.675** 17.2	—	X	175034-1

Positive Lock EX

250 Series
Straight Receptacles

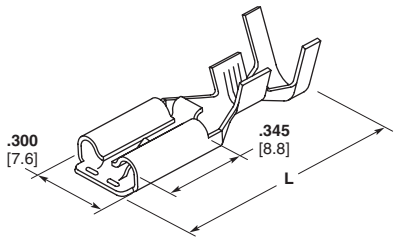

Wire Range AWG	Tab Thickness	Insulation Diameter	Material	Stock Thickness	L (Overall Length)			Terminal Part No.
18-14 0.76-2.09	**.032** 0.80	**.085-.135** 2.2-3.4	Stainless Steel	**.016** 0.41	**.835** 21.2	—	—	175164-1

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Positive Lock Receptacles (Continued)

Mark III
250 Series Receptacles

Stock Thickness — .016
Accepts .032 Tab



Wire Range AWG	Insulation Diameter	Material and Finish	UL	CSA	Part Number
22-18	**.060-.110** 1.52-2.79	Brass	X	X	63933-1
		Brass/Tin	X	X	63933-2
18-14	**.090-.155** 2.28-3.93	Brass	X	X	63854-1
		Brass/Tin	X	X	63854-2
16-12 or (2) 18 or (2) 16 or (1) 18 and (1) 16	**.120-.170** 3.04-4.31	Brass	X	X	1217092-1
		Brass/Tin	X	X	1217092-2

Mark III
Receptacle Housings



One Circuit Housing
A



Two Circuit Wax Motor Housing
B



Two Circuit Water Valve Housing
C

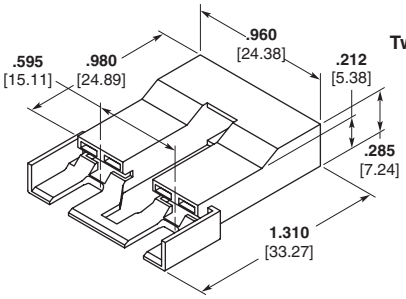

Two Circuit Water Valve Housing with Latch
D

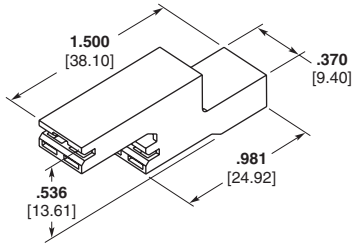

Two Circuit Housing
E

Style	Material	UL 94[1]	Color[2]	Part Number	Accepts	UL	CSA
A	Nylon	V2	Natural	521120-1	250 Series Positive Lock Mark III Terminals.	X	X
B	Nylon	V0	Natural	521766-1	250 Series FASTON and Positive Lock Mark III Terminals. Examples include 63306 and 63854.	X	X
		V2	Natural	521766-2[1]		—	—
D	Nylon	V2	Natural	2-521253-1[1]	250 Series FASTON and Positive Lock Mark III Terminals. Examples Include 63306 and 63854	—	—
			Natural	521253-1		X	X
			Red	521253-2		X	X
		V0	Red	1-521253-2		X	X
			Green	1-521253-3		X	X
			Blue	1-521253-7		X	X
C	Nylon	V2	Natural	521119-1		X	X
E	Nylon	V0	Natural	521955-1	250 Series MK III Positive Lock Receptacles 63993, 63854, 1217092	X	X

Note: All part numbers are RoHS compliant.

1 Housing material to IEC 60695-2-11 Glow Wire temps. 650°C, 750°C, & 850°C.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Positive Lock Receptacles (Continued)

Mark III
187 Series Receptacles



Wire Range AWG	Insulation Dia.	Mating Tab Thickness	Material and Finish	Terminal Part No.	UL	CSA	Applicator
22-18	**.090-.130** 2.29-3.30	**.020** 0.51	Tin Plated Brass	1217113-2	—	—	680645-2
		.032 0.81	Tin Plated Brass	1217097-2	—	—	680645-2
18-14	**.150-.200** 3.81-5.08	**.020** 0.51	Brass	1217114-1	—	—	680652-2
		.020 0.51	Tin Plated Brass	1217114-2	—	—	680652-2
18-14 (2) 18	**.150-.200** 3.81-5.08	**.032** 0.81	Brass	1217096-1	X	X	680652-2

Mark III
187 Series Receptacle Housings



Part Number 521187-1

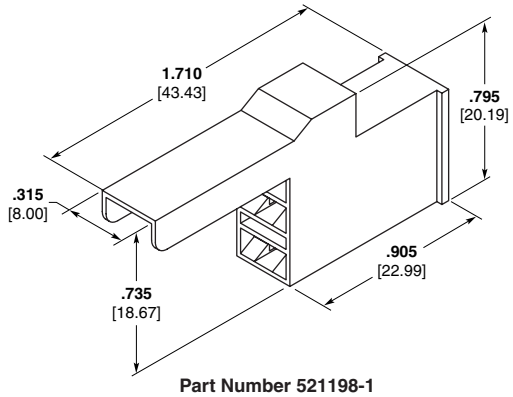

Part Number 521198-1

Material	UL 94	Color	UL	CSA	Part Number
Nylon	V2	Natural	X	X	521187-1
Nylon	V2	Natural	X	—	521198-1

Mark III
HVAC Motor Receptacle Housings

Material	Color	UL	CSA	Part Number
Nylon	Natural	X	X	521780-1
Nylon	Natural	X	X	521781-1

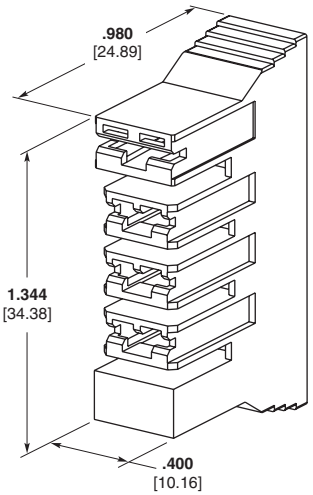

Part Number 521781-1
4-Position

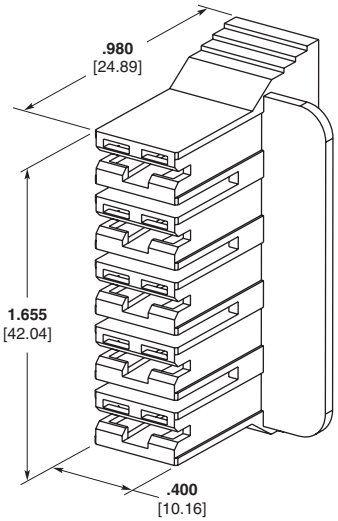

Part Number 521780-1
5-Position

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Positive Lock Receptacles (Continued)

110 Series
Straight Receptacles



Wire Range AWG	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	UL	CSA	Terminal Part No.
24-20	**.020** 0.51	**.040-.070** 1.02-1.78	Pre-Tin Brass	**.010** 0.25	—	—	175411-1
20-16	**.020** 0.51	**.080-.122** 2.03-3.10	Pre-Tin Brass	**.010** 0.25	—	—	174777-1

Receptacle Housing
Applicable Contact
Part Number 175411, 174777

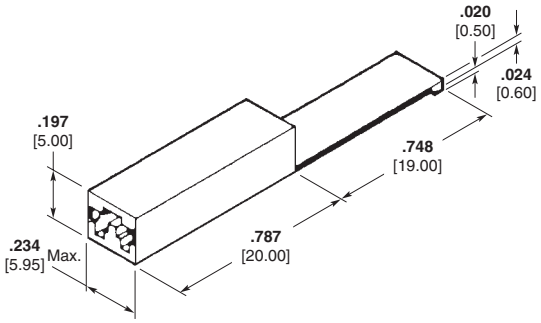

A — For 1 Circuit

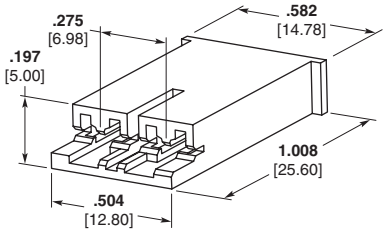

B — For 3 Circuit

Style	Material	UL 94	Color	UL	CSA	Part Number
A	6/6 Nylon	V2	Natural	X	X	174779-1
B	4/6 Nylon	V2	Black	—	—	1969227-1

Tab Dimension
For Signal Circuit

For 1 Circuit

Top View



Side View



Type A
(When using tab shoulder for butting)

Top View



Side View



Type B
(When using resin, etc., for butting)

Sagging of the tab's hole must not exceed 0.08 mm.



Housing Outline

For 2 Circuit

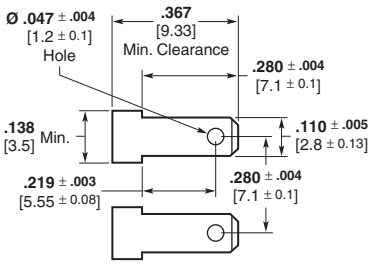

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Positive Lock RAST 5 Connector System

Product Facts

- Mates with .250 x .032 [6.35 x 0.81] tabs built on 5 mm centerlines
- Keying and polarization features
- Utilizes Positive Lock Mark III Receptacles
- Terminals available for 22-18 AWG, 18-14 AWG single wire or 18-16 AWG double wire applications
- Plain brass and tin plated terminals available
- Recognized under the Component Program of Underwriters Laboratories Inc., File No. E28476
- Certified by Canadian Standards Association File No. LR7189

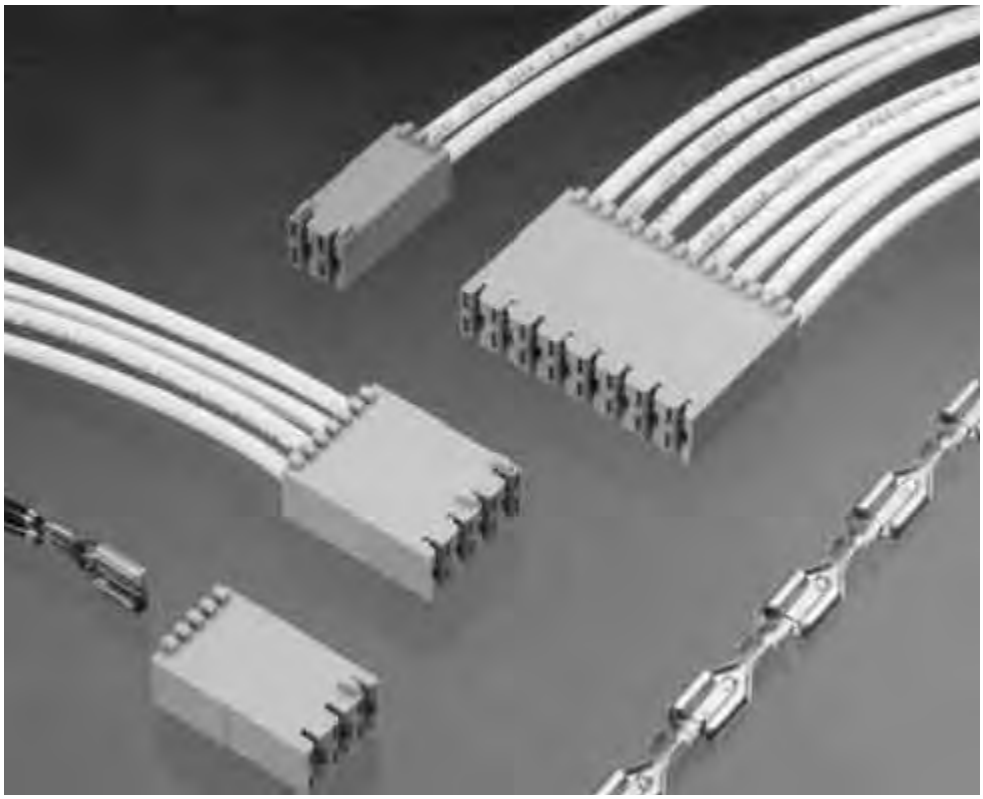

The Positive Lock RAST 5 connector system has been designed to mate with a control, switch or printed circuit board that has .250 x .032 [6.35 x 0.81] thick tabs built on 5 mm centerlines. This system utilizes our popular Positive Lock Mark III Receptacles and a series of housings to provide customers with a reliable solution to their wire management needs. This line of connectors offers keying and polarization features built into the housings that eliminate mismating and crossed wires. Two through eight circuit housings facilitate improved assembly operations and the Positive Lock Terminal provides excellent retention of the connector.

The acronym RAST 5 in the title is a reference to the European design standard for appliance wiring and component design, “Raster Anschluss Steck Technik 5 mm”. This standard outlines a system of keying, polarization and latching that is popular in Europe and other parts of the world. The Positive Lock RAST 5 system has been designed to mate with many of the components built with a RAST 5 standard interface. This system is an excellent way for OEMs or their subcontractors to use existing lead makers and termination equipment to produce connectors that mate to controls with RAST interfaces.

While the origins of this product are in the appliance industry, many other industries are embracing this style of connector. Marine, exercise equipment and hand tool manufacturers are recent examples of customers beginning to use this system. Any application where .250 x .032 [6.35 x 0.81] tabs are built on 5 mm centerlines is a potential candidate for this popular connector system.

See TE catalog 296599 for additional RAST products.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Positive Lock RAST 5 Connector System (Continued)

Mark III 250 Series Receptacles

Stock Thickness — .013 [0.33]
Tab size — .032 [0.81]



Wire Range AWG	ID	Material and Finish	Part Number	UL	CSA	Applicator No.
22-18	.060-.110 1.52-2.79	Brass	1217378-1	X	X	1852165-2
		Tin Plated Brass	1217378-2	X	X	1852165-2
18-14	.090-.155 2.29-3.94	Brass	1217094-1	X	X	680653-2
(2) 18	.190 4.83 Max.	Tin Plated Brass	1217094-2	X	X	680653-2
16-12	.120-.170 3.04-4.32	Brass	1217095-1	X	X	680654-2
(2) 18	(2) .120 3.05 Max.					
(2) 16	(2) .120 3.05 Max.	Tin Plated Brass	1217095-2	X	X	680654-2

Receptacle Housings

Material — 94 V-0, 6/6 Nylon

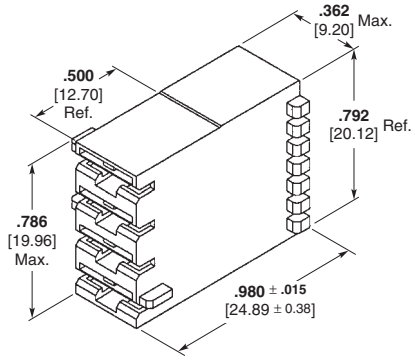

Standard Version



Blocked Circuit Version

Description	UL	CSA	Part Number	
			Standard Version[4]	Blocked Circuit Version[5]
2 Position	X	X	521204	—
3 Position	X	X	521205	521782
4 Position	X	X	521206	521295
5 Position	X	X	521207	521267
6 Position	X	X	521208	521435
7 Position	X	X	521209	521935
8 Position	X	X	521210	—
9 Position	X	X	521746	521936
10 Position	X	X	521792	521836
11 Position	X	X	521699	1969335

Notes: 1. All part numbers are RoHS compliant.
2. Housing base part number provided.
3. Standard colors are natural and blue.
4. Keying patterns determined by part dash number. Refer to the customer drawing for pattern options.
5. Blocking patterns determined by part dash number. Refer to the customer drawing for pattern options.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Ultra-Fast Fully Insulated FASTON Receptacles and Tabs

Product Facts

- **One-piece Fully Insulated Premier Line FASTON Receptacle crimp helps prevent shock and short hazards**
- **Designed for correct lead-in of tab**
- **Designed for full mating with a variety of tab styles including those with shoulders**
- **Funnel wire entry**
- **Wire Stop**
- **Visual inspection of crimp and wire brush**
- **Assemblies are color-coded by wire size**
- **Assemblies contain wire size and tab size designation**
- **Mating tab thickness marked on terminal and visible through housing (.110, .187 and .205 Series)**
- **Application tooling available to meet production requirements**
- **Tin plated copper alloy terminals**
- **UL rated at + 105°C**
- **Terminates 26-10 AWG solid, fused and stranded wire (Flags terminate stranded wire only)**

Performance Capabilities

- **Meets UL-310 specification for quick connect terminals; UL listed under File No. E-66717**
- **Meets CSA C22.2, No. 153 specification for quick connect terminals; CSA Certified under File No. LR 7189**
- **600-volt application capability (1,000 volts for signs and fixtures)**



The Ultra-Fast Fully Insulated FASTON Receptacle and Tab offers the advantage of a completely protected terminal and a wire crimp with comparable electromechanical performance to open barrel "F" crimp FASTON Terminals. The "User-Friendly" design combines easy mating with rounded corners. The .187 and .250 series receptacles incorporate a two-stage roll configuration and a cantilever mounted dimple which provides easy insertion and multiple independent points of contact for reduced tab interface resistance.

Ultra-Fast Fully Insulated FASTON Receptacles, Flag Receptacles and Tabs preclude the need for costly electrical safety interlocks or special protective shields to help prevent shock hazards. In addition, electrical short circuits from exposed leads are eliminated, even in equipment requiring close contact spacing.

The Ultra-Fast FASTON Receptacle, Flag Receptacle and Tab are preinsulated assemblies featuring a housing molded from type 6/6 nylon material with a +130°C UL temperature rating.

The Ultra-Fast FASTON Receptacle housing completely encloses a tin plated copper alloy Premier FASTON receptacle which has been stress-relieved for increased durability and resistance to abuse. The FASTON receptacle is recessed sufficiently within the housing to allow its use in 600-volt applications. The receptacle portion of the terminal is designed for positive mating with a variety of tabs, including those with shoulders. The housing has a slotted membrane which is displaced by two tab shoulders allowing proper engagement of tab and receptacle while maintaining the fully insulated characteristic.

Positive entry and lead-in of the tab is provided by the inner housing wall and the lead-in on the terminal rolls. This permits positive engagement, even in blind mating locations.

The Ultra-Fast FASTON Tab housing completely encloses a tin plated copper alloy FASTON tab. The FASTON tab is recessed sufficiently within the housing to allow its use in 600-volt applications. The housing is designed to completely encapsulate the tab and receptacle when the two are mated.

Quality control is easily maintained. The nylon housing is translucent, allowing visual inspection of the termination. In addition, a crimp code on the platform hand tool is indented into the housing during the crimping operation which identifies that the proper crimp dies were used.

Depending on production requirements, TE provides a complete selection of terminating equipment from hand tools to automatic lead makers.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Ultra-Fast Fully Insulated FASTON Receptacles and Tabs (Continued)

Test Specifications

The following information and accompanying graphs are taken from TE Product Qualification Testing of Ultra-Fast FASTON product. Tests were conducted on representative production samples, and all values shown are averages of group results. The values shown are typical results and may vary due to differences in processing, application and methods of testing.

Current vs. Temperature Rise (16 AWG)

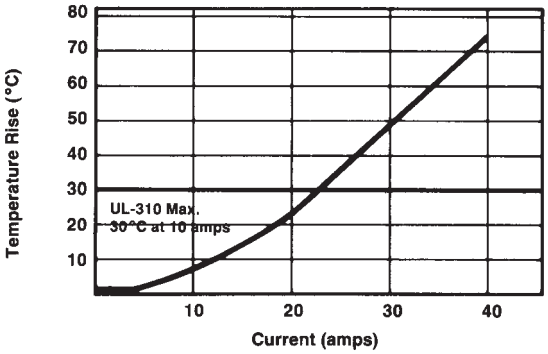

The heat generated by the current passing through a termination is a primary limit to the load-carrying capabilities of the application. A low termination resistance will produce a lower temperature rise as current is applied. In order to evaluate this characteristic, UL has established current ratings for each wire size and set a maximum temperature rise to assure safe operation. For example, 16 AWG stranded wire has a UL 310 maximum temperature rise of 30°C above ambient temperature at the rated current of 10 amps. In the testing of the Ultra-Fast FASTON product applied to 16 AWG wire, the temperature rise was found to be below 10°C at the rated current. In fact, the temperature rise did not exceed 30°C until the current was above 20 amps, more than twice the rated current.

Current Cycling vs. Temperature Rise (16 AWG)

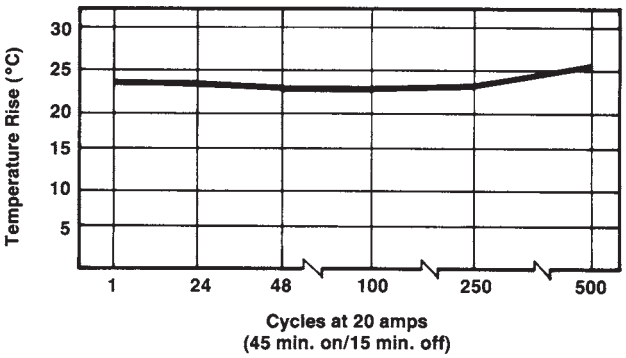

Maintaining a safe temperature rise during cyclic applications of excessive current is the toughest challenge for the crimp-thru-plastic concept. The ability of the Ultra-Fast FASTON product line to meet this goal sets it apart from other preinsulated terminations. TE's experience in crimp development results in a termination that exhibits stable heating characteristics which are well within the safety requirements of the industry.

To test a product, it must be subjected to 500 on and off cycles at twice the rated current for the particular wire size. The temperature rise is measured on the 24th cycle and the 500th cycle. The maximum temperature rise is limited to 85°C above ambient temperature with a maximum of 15°C increase on any sample between the 24th and 500th cycles. Our testing of 16 AWG wire application indicated a 25.5°C maximum temperature rise up to 500 cycles, with a maximum increase of 0.8°C from the 24th to the 500th cycle for one sample in the test group.

Engagement/Separation

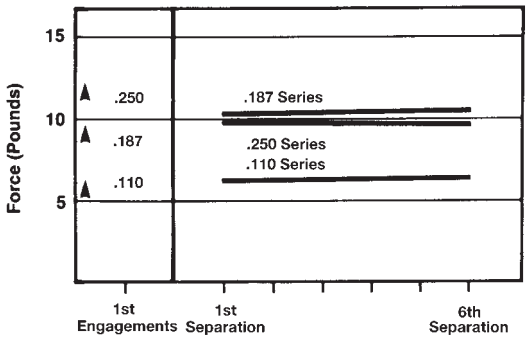

The forces caused by the rolls of FASTON style terminals determine the contact interface integrity of a mated receptacle and tab. These forces must be high enough to prevent oxidation and corrosion from forming inside the contact area. As these forces are raised to increase the electrical performance, the engagement and separation forces for mating the contacts are significantly increased. For this reason, the Premier Low Insertion Force FASTON concept of receptacle design has been carried over to the Ultra-Fast FASTON products. This feature provides consistent engagement and separation forces while maintaining a high standard of electrical reliability.

Crimp Tensile

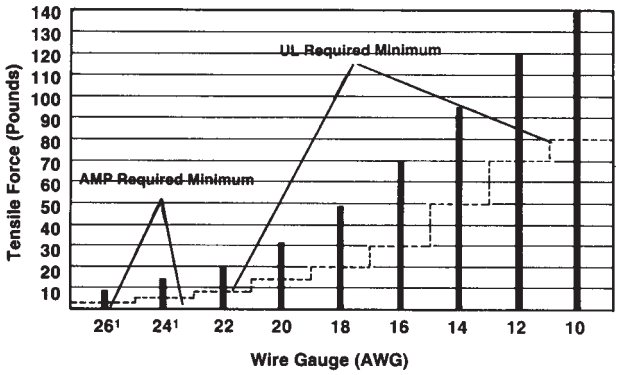

[1] UL does not have requirements for wire gauges below 22 AWG.
Note: Minimum requirements are per TE specifications.

The crimp tensile strength of a wire-to-terminal connection is important in guarding against such hazards as wire flexing, vibration and wire strain. However, maximum tensile strength does not insure maximum electrical performance. An acceptable compromise between tensile strength and electrical performance must always be reached, using recommended crimp heights.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Ultra-Fast Fully Insulated FASTON Receptacles and Tabs (Continued)

Ultra-Fast Fully Insulated FASTON Receptacles

Material

Housing — Nylon Type 6/6
Flammability — UL 94 V-2
Terminal — Tin plated, copper alloy
Color Code (Translucent)
Violet — 26-22 AWG
Red — 22-18 AWG
Blue — 16-14 AWG
Yellow — 12-10 AWG

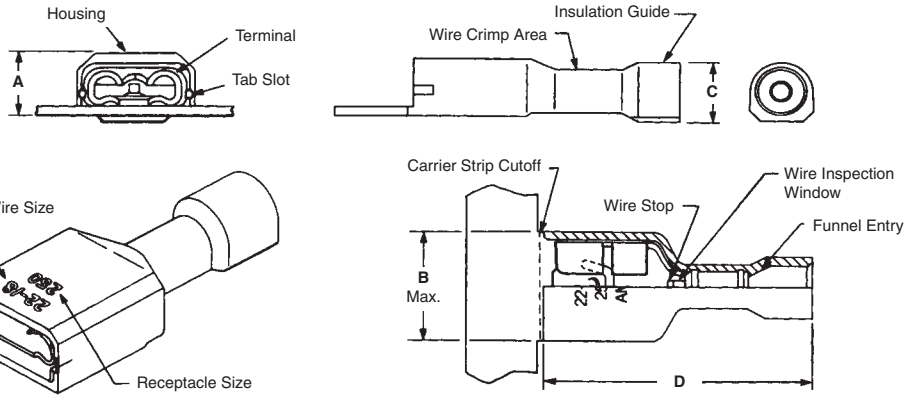

Description	Wire Range AWG	Ins. Dia. Max.	Dimensions A	B	C	D	Mating Tab	Terminal Base Material	Part Numbers Strip	Loose Piece
.110/.125 Series	26-22	**.100** 2.54	**.145** 3.68	**.275** 6.99	**.138** 3.51	**.735** 18.67	**.020 x .110/.125** 0.51 x 2.79/3.18	Brass	7-520365-2[1]	7-520366-2[1]
	22-18	**.120** 3.05	**.160** 4.06	**.275** 6.99	**.167** 4.24	**.735** 18.67	**.016 x .110/.125** 0.41 x 2.79/3.18	Brass	2-520080-2[1]	2-520081-2[1]
							.020 x .110/.125 0.51 x 2.79/3.18	Brass	2-520083-2	2-520084-2
							.032 x .110/.125 0.81 x 2.79/3.18	Brass	2-520272-2[3]	2-520273-2
		.230 5.84	**.155** 3.94	**.275** 6.99	**.295** 7.49	**.865** 21.97	**.020 x .110/.125** 0.51 x 2.79/3.18	Brass	2-520306-2	—
							.032 x .110/.125 0.81 x 2.79/3.18	Brass	2-520310-2	—
	16-14	**.260** 6.60	**.175** 4.45	**.275** 6.99	**.325** 8.26	**.865** 21.97	**.020 x .110/.125** 0.51 x 2.79/3.18	Brass	3-520370-2[2]	—
.187 Series	22-18	**.135** 3.43	**.165** 4.19	**.336** 8.53	**.200** 5.08	**.855** 21.72	**.020 x .187** 0.51 x 4.75	Brass	2-520181-2[3]	2-520182-2
								Phos. Brz.	2-520181-4	—
							.032 x .187 0.81 x 4.75	Brass	2-520193-2[3]	2-520194-2
		.230 5.84	**.165** 4.19	**.336** 8.53	**.295** 7.49	**.935** 23.75	**.020 x .187** 0.51 x 4.75	Brass	2-520261-2[3]	2-520262-2
							.032 x .187 0.81 x 4.75	Brass	2-520274-2	2-520275-2
	16-14	**.160** 4.06	**.185** 4.70	**.336** 8.53	**.225** 5.72	**.855** 21.72	**.020 x .187** 0.51 x 4.75	Brass	3-350815-2	3-350816-2
							.032 x .187 0.81 x 4.75	Brass	3-520124-2[3]	3-520125-2
		.260 6.60	**.185** 4.70	**.336** 8.53	**.325** 8.26	**.935** 23.75	**.020 x .187** 0.51 x 4.75	Brass	3-520150-2	3-520151-2
							.032 x .187 0.81 x 4.75	Brass	3-520276-2[3]	—
.205 Series	22-18	**.135** 3.43	**.195** 4.95	**.409** 10.39	**.200** 5.08	**.855** 21.72	**.020 x .205** 0.81 x 5.21	Brass	2-521406-2	—
							.032 x .205 0.81 x 5.21	Brass	2-521308-2	—
.250 Series	22-18	**.135** 3.43	**.195** 4.95	**.409** 10.39	**.200** 5.08	**.855** 21.72	**.032 x .250** 0.81 x 6.35	Brass	2-520183-2[3]	2-520184-2
								Phos. Brz.	2-520183-4	2-520184-4
		.230 5.84	**.195** 4.95	**.409** 10.39	**.295** 7.49	**.935** 23.75	**.032 x .250** 0.81 x 6.35	Brass	2-520263-2	2-520264-2
								Phos. Brz.	2-520263-4	—
	16-14	**.160** 4.06	**.195** 4.95	**.409** 10.39	**.225** 5.72	**.855** 21.72	**.032 x .250** 0.81 x 6.35	Brass	3-350819-2	3-350820-2
								Phos. Brz.	3-520116-2	3-520117-2
		.260 6.60	**.195** 4.95	**.409** 10.39	**.325** 8.26	**.935** 23.75	**.032 x .250** 0.81 x 6.35	Brass	3-520140-2	3-520141-2
								Phos. Brz.	3-520140-4	—
	12-10	**.320** 8.13	**.250** 6.35	**.409** 10.39	**.388** 9.86	**.935** 23.75	**.032 x .250** 0.81 x 6.35	Brass	4-520447-2[3]	4-520448-2

[1] UL Recognized, CSA Certified.
[2] UL Recognized 8 AMPS Max. CSA Certified.
[3] Available with black insulator — Part Number 9-XXXXXX-2.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Ultra-Fast Fully Insulated FASTON Receptacles and Tabs (Continued)

Ultra-Fast Fully Insulated FASTON Tabs

Material

Housing — Nylon Type 6/6
Flammability — UL 94 V-2
Terminal — Tin plated, copper alloy
Color Code (Translucent)
Red — 22-18 AWG
Blue — 16-14 AWG
Yellow — 12-10 AWG

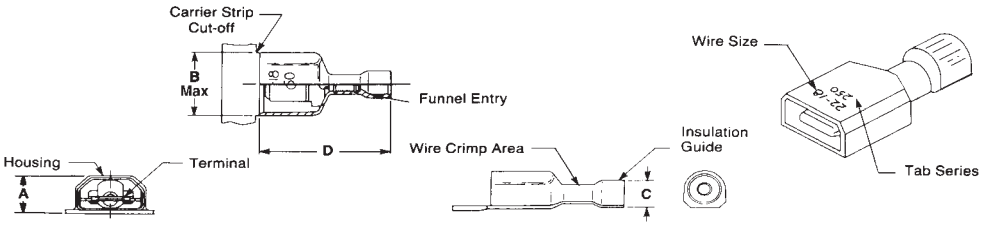

Description	Wire Range AWG	Ins. Dia Max.	Dimensions A	B	C	D	Tab Size	Terminal Base Material	Part Numbers Strip	Loose Piece
.250 Series	22-18	**.135** 3.43	**.290** 7.37	**.522** 13.26	**.205** 5.21	**.855** 21.72	**.032 x .250** 0.81 x 6.35	Brass	2-520102-2	2-520103-2
		.230 5.84	**.290** 7.37	**.522** 13.26	**.295** 7.49	**.935** 23.75	**.032 x. 250** 0.81 x 6.35	Brass	2-521144-2	2-521192-2
	16-14	**.160** 4.06	**.290** 7.37	**.522** 13.26	**.230** 5.84	**.855** 21.72	**.032 x. 250** 0.81 x 6.35	Brass	3-520106-2	3-520107-2
		.260 6.60	**.290** 7.37	**.522** 13.26	**.325** 8.26	**.935** 23.75	**.032 x. 250** 0.81 x 6.35	Brass	3-521142-2	3-521191-2
	12-10	**.320** 8.13	**.352** 8.94	**.522** 13.26	**.388** 9.86	**.935** 23.75	**.032 x .250** 0.81 x 6.35	Brass	4-521097-2	4-521098-2
.187 Series	22-18	**.135** 3.43	**.250** 6.35	**.448** 11.38	**.205** 5.21	**.793** 20.14	**.020 x .187** 0.51 x 4.75	Brass	2-521102-2	2-521103-2
							.032 x .187 0.81 x 4.75	Brass	2-521104-2	2-521105-2

Ultra-Fast Fully Insulated FASTON Flag Receptacles

Material

Housing — Nylon Type 6/6
Flammability — UL 94 V-2
Terminal — Tin plated, copper alloy
Color Code (Translucent)
Red — 22-18 AWG
Blue — 16-14 AWG
Yellow — 12-10 AWG

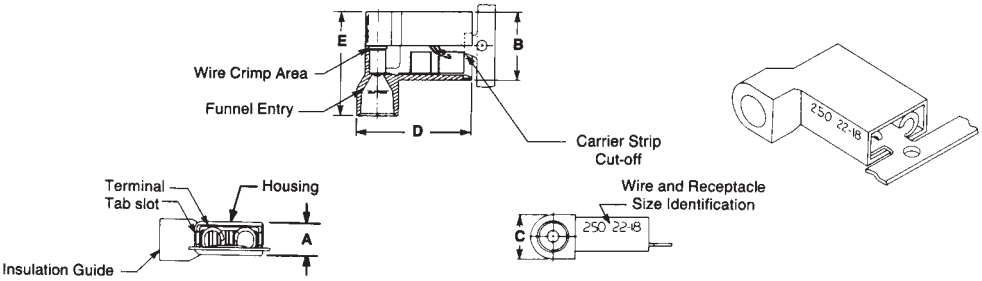

Description	Wire Range[1] AWG	Ins. Dia. Max.	Dimensions A	B	C	D	E	Mating Tab	Terminal Base Material	Part Numbers Strip	Loose Piece
.187 Series	22-18	**.165** 4.19	**.187** 4.75	**.320** 8.13	**.235** 5.97	**.636** 16.15	**.515** 13.08	**.020 x .187** 0.51 x 4.75	Brass	2-520334-2[2]	2-520335-2
								.032 x .187 0.81 x 4.75	Brass	2-520336-2[2]	2-520337-2
	16-14	**.185** 4.70	**.187** 4.75	**.320** 8.13	**.255** 6.48	**.632** 16.05	**.515** 13.08	**.020 x .187** 0.51 x 4.75	Brass	3-520338-2	3-520339-2
								.032 x .187 0.81 x 4.75	Brass	3-520340-2[2]	—
		.260 6.60	**.187** 4.75	**.320** 8.13	**.325** 8.26	**.668** 16.97	**.565** 14.35	**.020 x .187** 0.51 x 4.75	Brass	3-520997-2	—
								.032 x .187 0.81 x 4.75	Brass	3-521247-2	—
.205 Series	22-18	**.165** 4.19	**.187** 4.75	**.385** 9.78	**.235** 5.97	**.636** 16.15	**.580** 14.73	**.032 x .205** 0.81 x 5.21	Brass	2-521164-2	—
.250 Series	22-18	**.165** 4.19	**.187** 4.75	**.385** 9.78	**.235** 5.97	**.636** 16.15	**.580** 14.73	**.032 x .250** 0.81 x 6.35	Brass	2-520128-2	2-520129-2
		.230 5.84	**.187** 4.75	**.385** 9.78	**.295** 7.49	**.665** 16.89	**.630** 16.00	**.032 x .250** 0.81 x 6.35	Brass	2-520856-2	—
	16-14	**.185** 4.70	**.187** 4.75	**.385** 9.78	**.255** 6.48	**.632** 16.05	**.580** 14.73	**.032 x .250** 0.81 x 6.35	Brass	3-520132-2[2]	3-520133-2
		.260 6.60	**.187** 4.75	**.385** 9.78	**.325** 8.26	**.668** 16.97	**.630** 16.00	**.032 x .250** 0.81 x 6.35	Brass	3-521013-2	—

[1] Stranded wire only.
[2] Available with black insulator — Part Number 9-XXXXXX-2.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Ultra-Fast Plus Fully Insulated FASTON Receptacles and Tabs

Product Facts

- One-piece fully insulated premier line FASTON receptacle with insulation crimp helps prevent shock and short hazards
- Designed for correct lead-in of tab
- Designed for full mating with a variety of tab styles including those with shoulders
- Funnel wire entry
- Wire stop
- Visual inspection of crimp and wire brush
- Assemblies are color-coded by wire size
- Assemblies contain wire size and tab size designation
- Mating tab thickness marked on terminal and visible through housing (110 and 187 series)
- Application tooling available to meet production requirements
- Tin plated copper alloy terminals
- UL rated at +105°C
- Terminates 22-14 AWG solid, fused and stranded wire
- Complies with the IEC 380, 601, 950, and UL 1950 requirements for a secondary means of insulation fixing

Performance Capabilities

- Meets UL-310 specification for quick connect terminals; UL listed under File No. E-66717
- Meets CSA C22.2, No.153 specification for quick connect terminals; CSA certified under File No. LR 7189
- 600-volt application capability (1,000 volts for signs and fixtures)

- Tested by TUV File No. E9071003 as suitable for end product certification to the following standards:

EN 60 950/09.87

DIN IEC 380

DIN IEC 601-1 Part 1



Ultra-Fast Plus fully insulated FASTON receptacles and tabs offer all the advantages of the standard Ultra-Fast product plus an insulation crimp.



Insulation Crimp Cross Section

Ultra-Fast Plus fully insulated FASTON receptacles and tabs preclude the need for costly electrical safety interlocks or special protective shields to help prevent shock hazards. In addition, electrical short circuits from exposed leads are eliminated, even in equipment requiring close contact spacing.

Ultra-Fast Plus FASTON receptacles and tabs are preinsulated assemblies featuring a co-molded housing produced from two different nylon materials. The receptacle/ tab and wire barrel portions of the housing are molded from type 6/6 nylon material with a +130°C UL temperature rating. The insulation barrel is molded from a premium grade nylon selected to retain the insulation crimp shape. This premium nylon exhibits minimal springback, thus providing actual insulation crimp tensile strength as well as strain relief for applications where extreme wire dressing and/or vibration are present.

The Ultra-Fast Plus FASTON receptacle housing completely encloses a tin plated copper alloy premier FASTON receptacle which has been stress relieved for increased durability and resistance to operator abuse. The FASTON receptacle is recessed sufficiently within the housing to allow its use in 600-volt applications. The receptacle portion of the terminal is designed for positive mating with a variety of tabs, including those with shoulders. The housing has a slotted membrane which is displaced by two tab shoulders allowing proper engagement of tab and receptacle while maintaining the fully insulated characteristics.

Positive entry and lead-in of the tab is provided by the inner housing wall and the lead-in on the terminal rolls. This permits positive engagement, even in blind mating locations.

The Ultra-Fast Plus FASTON tab housing completely encloses a tin plated copper alloy FASTON tab. The FASTON tab is recessed sufficiently within the housing to allow its use in 600-volt applications. The housing is designed to completely encapsulate the tab and receptacle when the two are mated.

Quality control is easily maintained. The nylon housing is translucent, allowing visual inspection of the termination.

Depending on production requirements, TE provides a complete selection of terminating equipment from hand tools to automatic lead makers.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Ultra-Fast Plus Fully Insulated FASTON Receptacles and Tabs (Continued)

Ultra-Fast Plus Fully Insulated FASTON Receptacles

Material

Housing — Nylon
Flammability — UL 94 V-2
Terminal — Tin plated, copper alloy
Color Code (Translucent)
Red — 22-18 AWG
Blue — 16-14 AWG







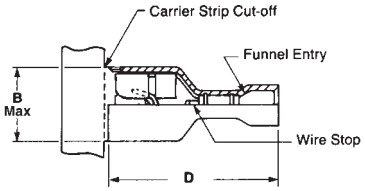

Description	Wire Range AWG	Ins. Dia. Range	Dimensions A	B	C	D	Mating Tab	Terminal Base Material	Part Numbers Strip	Loose Piece
.110/.125 Series	22-18	**.060-.120** 1.52-3.05	**.160** 4.06	**.275** 6.99	**.167** 4.24	**.735** 18.67	**.020 x .110/.125** 0.51 x 2.79/3.18	Brass	2-520932-2	—
							.032 x .110/.125 0.81 x 2.79/3.18	Brass	2-520979-2	—
.187 Series	22-18	**.060-.135** 1.52-3.43	**.165** 4.24	**.336** 8.53	**.200** 5.08	**.855** 21.72	**.020 x .187** 0.51 x 4.75	Brass	2-520401-2	2-520409-2
							.032 x .187 0.81 x 4.75	Brass	2-520403-2	2-520411-2
	16-14	**.090-.160** 2.29-4.06	**.185** 4.70	**.336** 8.53	**.225** 5.72	**.855** 21.72	**.020 x .187** 0.51 x 4.75	Brass	3-520402-2	3-520410-2
							.032 x .187 0.81 x 4.75	Brass	3-520404-2	3-520412-2
.250 Series	22-18	**.060-.135** 1.52-3.43	**.195** 4.95	**.409** 10.39	**.200** 5.08	**.855** 21.72	**.032 x .250** 0.81 x 6.35	Brass	2-520405-2	2-520407-2
	16-14	**.090-.160** 2.29-4.06	**.195** 4.95	**.409** 10.39	**.225** 5.72	**.855** 21.72	**.032 x .250** 0.81 x 6.35	Brass	3-520406-2	3-520408-2

Ultra-Fast Plus Fully Insulated FASTON Tabs

Material

Housing — Nylon
Flammability — UL 94 V-2
Terminal — Tin plated, copper alloy
Color Code (Translucent)
Red — 22-18 AWG
Blue — 16-14 AWG







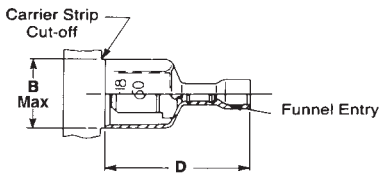

Description	Wire Range AWG	Ins. Dia. Range	Dimensions A	B	C	D	Mating Tab	Terminal Base Material	Part Numbers Strip	Loose Piece
.187 Series	22-18	**.060-.135** 1.52-3.43	**.250** 6.35	**.488** 11.38	**.205** 5.21	**.793** 20.14	**.020 x .187** 0.51 x 4.75	Brass	2-521360-2	—
							.032 x .187 0.81 x 4.75	Brass	2-521361-2	—
.250 Series	22-18	**.060-.135** 1.52-3.43	**.290** 7.37	**.522** 13.26	**.205** 5.21	**.855** 21.72	**.032 x .250** 0.81 x 6.35	Brass	2-521055-2	—
	16-14	**.090-.160** 2.29-4.06	**.290** 7.37	**.522** 13.26	**.230** 5.84	**.855** 21.72	**.032 x .250** 0.81 x 6.35	Brass	3-521057-2	—

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Ultra-Pod Fully Insulated FASTON Receptacles and Tabs

Product Facts

- **Reduced insertion force**
- **Designed for correct lead-in of tab**
- **Mates with typical 110, 187 and 250 series tab styles including those with shoulders**
- **110 series accepts 22-18 AWG [0.3–1 mm²], 187 series accepts 20-16 AWG [0.5–1.4mm²] wire and 250 series accepts 22-10 AWG [0.3–5 mm²] wire**
- **Visual inspection of crimp and wire brush**
- **Terminated by automatic or semi-automatic equipment to meet production requirements**
- **Complies with the IEC 380, 601 and 950 and UL 1950 requirements for a secondary means of insulation fixing**
- **Listed by Underwriters Laboratories Inc., File No. E66717**
- **CSA certified, File No. LR 7189**

Technical Documents

Product Specification
108-1285
108-2215

Application Specification
114-2124

Hand Tools — Insertion

250 Series—314916-1
250 Series Flag—314919-1

Hand Tools — Extraction

250 Series—314917-1

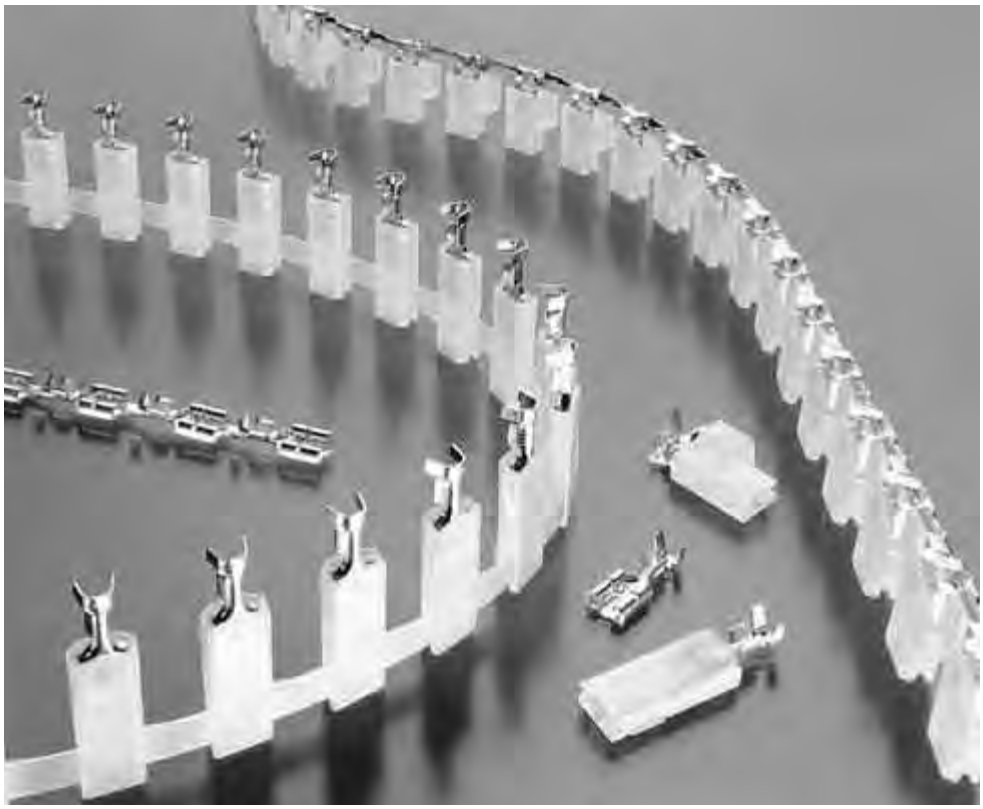

Ultra-Pod fully insulated FASTON receptacles offer the newest in one-step automatic application of insulated quick connects. The unique integral plastic carrier designed specifically for this product allows insulated F-Crimp terminations to be produced quickly and easily. Applied cost savings are attainable with either bench or high-speed automatic termination equipment and the elimination of any secondary insulation operations. Both the crimping of the terminal and the terminal insulating occur in a single stroke of the press and applicator — the crimping on the down-stroke and the insulating on the up-stroke.

The receptacles contained within the Ultra-Pod FASTON receptacle assemblies are tested and customer qualified and can be used in existing applications where insulation has been accomplished by other means. The low insertion force design provides easier tab insertion, reduces operator fatigue and improves the productivity and reliability of the end assembly operation.

The insulating housing is produced by a unique molding process which provides an integral carrier and eliminates the crimp location problems related to secondary carriers. This housing, produced from 130°C rated 6/6 nylon, covers the FASTON receptacle sufficiently to provide for use in 600-volt applications. Most importantly, this insulating system helps eliminate the workplace hazards and labor costs of chemically expanded or heat shrink tubing.

Depending on production requirements, TE provides a complete selection of terminating equipment from bench press to automatic lead maker.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Ultra-Pod Fully Insulated FASTON Receptacles and Tabs (Continued)

Insulation Support



Description	Wire Range	Ins. Dia. Range	Dimensions A	B	C	D	Mating Tab	UL 94[1]	Color	Material and Finish	Part Numbers
.110 Series	22-18	**.080-.120** 2.03-3.05	**.151** 3.83	**.224** 5.69	**.205** 5.21	**.805** 20.45	**.020** 0.51	V-2	Natural	Brass	521228-1
										Tin Plated Brass	521228-2
								V-0	Natural	Tin Plated Brass	521408-2[4]
							.032 0.81	V-2	Natural	Brass	521436-1[4]
										Tin Plated Brass	521436-2
								V-0	Natural	Brass	521437-1[4]
										Tin Plated Brass	521437-2[2,4]
.187 Series	20-16	**.090-.130** 2.29-3.30	**.170** 4.32	**.295** 7.49	**.200** 5.08	**.775** 19.68	**.020** 0.51	V-2	Natural	Brass	520973-1
										Tin Plated Brass	520973-2
								V-0	Natural	Brass	521225-1
										Tin Plated Brass	521225-2
							.032 0.81	V-2	Natural	Brass	520982-1
										Tin Plated Brass	520982-2
								V-0	Natural	Brass	521284-1
										Tin Plated Brass	521284-2
	18-16 or 2-18	(2) **.105** 2.67 Max.	**.170** 5.33	**.295** 7.49	**.200** 5.08	**.775** 19.68	**.020** 0.51	V-2	Natural	Brass	521293-1
										Tin Plated Brass	521293-2
											521995-2[4,5]
								V-0	Natural	Brass	521586-1
										Tin Plated Brass	521586-2
.250 Series	22-18	**.090-.130** 2.29-3.30	**.195** 4.95	**.370** 9.40	**.225** 5.72	**.945** 24.00	**.032** 0.81	V-2	Natural	Brass	520988-1
										Tin Plated Brass	520988-2
								V-0	Natural	Brass	521368-1
										Tin Plated Brass	521368-2
	18-14	**.120-.170** 3.05-4.32	**.195** 4.95	**.370** 9.40	**.225** 5.72	**.945** 24.00	**.032** 0.81	V-2	Natural	Brass	521997-1[4,5]
											520963-1
										Tin Plated Brass	520963-2
								V-0	Natural	Brass	521367-1
										Tin Plated Brass	521367-2
								V-2	Black	Tin Plated Brass	521011-2[2]
										Nickel Plated Steel	521011-1[2,3]
											521113-2[3]
	18-14 or 2-18	(2) **.105** 2.67 Max.	**.195** 4.95	**.370** 9.40	**.225** 5.72	**.945** 24.00	**.032** 0.81	V-2	Natural	Brass	521637-1
										Tin Plated Brass	521637-2
											521998-2[4,5]
								V-0	Natural	Brass	521632-1
										Tin Plated Brass	521632-2
[2]	14-10	**.130-.180** 3.30-4.57	**.195** 4.95	**.370** 9.40	**.225** 5.72	**.945** 24.00	**.032** 0.81	V-2	Natural	Brass	520974-1
										Tin Plated Brass	520974-2
								V-0	Natural	Brass	521366-1
										Tin Plated Brass	521366-2

[1] Flammability rating of plastic material.
[2] 150°C rated nylon.
[3] UL recognized.
[4] No UL or CSA approvals.
[5] IEC 60695-2-11 Glow Wire temps. 650°C, 750°C, & 850°C.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Ultra-Pod Fully Insulated FASTON Receptacles and Tabs (Continued)

Flag Insulation Support



Description	Wire Range	Ins. Dia. Range	Dimensions A	B	C	D	Mating Tab	UL 94[1]	Color	Material and Finish	Part Numbers
.187 Series	22-18	**.060-.110** 1.52-2.79	**.170** 4.32	**.295** 7.49	**.485** 12.32	**.680** 17.27	**.020** 0.51	V-2	Natural	Brass	521470-1[4]
										Tin Plated Brass	521470-2[4]
											1969106-2[3,5]
								V-0	Natural	Brass	521596-1[4]
										Tin Plated Brass	521596-2[4]
							.032 0.81	V-2	Natural	Brass	521598-1[3]
										Tin Plated Brass	521598-2[3]
								V-0	Natural	Brass	521600-1[4]
										Tin Plated Brass	521600-2[4]
	18-14 or (2) 20 or (2) 18	(2) **.105** 2.66 Max.	**.170** 4.32	**.295** 7.49	**.485** 12.32	**.680** 17.27	**.020** 0.51	V-2	Natural	Brass	521471-1[4]
										Tin Plated Brass	521471-2[4]
											1969133-2[3,5]
								V-0	Natural	Brass	521597-1[4]
										Tin Plated Brass	521597-2[4]
							.032 0.81	V-2	Natural	Brass	521599-1[4]
										Tin Plated Brass	521599-2[4]
											1969107-2[3,5]
								V-0	Natural	Brass	521601-1[4]
										Tin Plated Brass	521601-2[4]
.250 Series	22-18	**.050-.100** 1.27-2.54	**.200** 5.08	**.370** 9.40	**.585** 14.86	**.680** 17.27	**.032** 0.81	V-2	Natural	Brass	521050-1
										Tin Plated Brass	521050-2
								V-0	Natural	Brass	521411-1
										Tin Plated Brass	521411-2
	18-14	**.110-.160** 2.79-4.06	**.200** 5.08	**.370** 9.40	**.585** 14.86	**.680** 17.27	**.032** 0.81	V-2	Natural	Brass	1969109-1[3,5]
										Tin Plated Brass	1969109-2[3,5]
										Brass	520971-1
										Tin Plated Brass	520971-2
									Black	Tin Plated Brass	520971-4
										Nickel Plated Steel	521087-1[3]
								V-0	Natural	Brass	521282-1
										Tin Plated Brass	521282-2
	18-14 or (2) 20 or (2) 18	(2) **.105** 2.66 Max.	**.200** 5.08	**.370** 9.40	**.585** 14.86	**.680** 17.27	**.032** 0.81	V-2	Natural	Brass	521112-1
										Tin Plated Brass	1969110-2[3,5]
								V-0	Natural	Brass	521633-1
										Tin Plated Brass	521633-2

[1] Flammability rating of plastic material.
[2] UL pending for double wire terminations.
[3] No UL or CSA approvals.
[4] No CSA approvals.
[5] IEC 60695-2-11 Glow Wire temps. 650°C, 750°C, & 850°C.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Ultra-Pod Fully Insulated FASTON Receptacles and Tabs (Continued)

Positive Lock Insulation Support



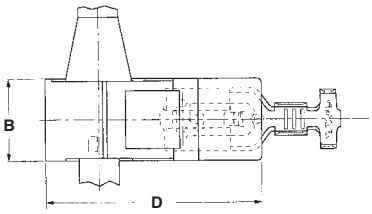

Description	Wire Range	Ins. Dia. Range	Dimensions A	B	C	D	Mating Tab	UL 94[1]	Color	Material and Finish	Part Numbers
.187 Series	18-14	**.110-.180** 2.79-4.57	**.186** 4.72	**.307** 7.80	**.265** 6.73	**.812** 20.62	**.020** 0.51	V-2	Natural	Brass	521271-1[2]
										Tin Plated Brass	521271-2[2]
								V-0	Natural	Tin Plated Brass	521212-2[2]
.250 Series	18-14	**.110-.180** 2.79-4.57	**.205** 5.21	**.370** 9.40	**.245** 6.22	**.950** 24.13	**.032** 0.81	V-2	Natural	Brass	521213-1[2]
										Tin Plated Brass	521213-2[2]
								V-0	Natural	Brass	521317-1[2]
										Tin Plated Brass	521317-2[2]

[1] Flammability rating of plastic material.
[2] UL Recognized, CSA Certified

Tabs Insulation Support



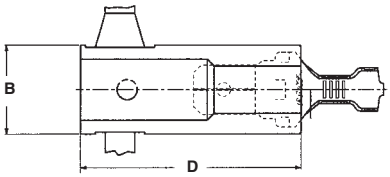

Description	Wire Range	Ins. Dia. Range	Dimensions A	B	C	D	Tab	UL 94[1]	Color	Material and Finish	Part Numbers
.250 Series	18-14	**.130-.180** 3.30-4.57	**.275** 6.99	**.450** 11.43	**.310** 7.87	**1.120** 28.45	**.032** 0.81	V-2	Natural	Brass	521217-1
										Tin Plated Brass	521217-2
								V-0	Natural	Brass	521451-1
										Tin Plated Brass	521451-2
	12-10	**.150-.200** 3.81-5.08	**.275** 6.99	**.450** 11.43	**.310** 7.87	**1.120** 28.45	**.032** 0.81	V-2	Natural	Brass	521227-1[2]
										Tin Plated Brass	521227-2[2]

[1] Flammability rating of plastic material.
[2] No UL or CSA approvals

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

PIDG FASTON Receptacles and Tabs

Product Facts

- **Pre-insulated terminal designed for complete and uniform reliability in the most difficult circuit environment**
- **Consists of an unplated or tin plated brass body or a tin plated phosphor bronze body with a specially designed copper sleeve and insulation sleeve fitted over the terminal barrel**
- **Design of the tool dies and construction of the terminal insures uniform insulation thickness under crimping pressure, transmitting this pressure evenly to the center of the crimp area**

The TE Mated Tool/Terminal Concept

- **TE compression crimping produces crimps for a given size wire and terminal that are precisely alike in appearance and performance**
- **Terminal and the crimping tool are designed as precisely matched devices**
- **Dies are precision-engineered from the finest hard-metal alloys**
- **Crimping pressure is controlled by a ratchet device on the hand tool or a corresponding pre-calibration in the crimping jaws of TE automated crimping machines**

The Crimp

- **Crimping pressure does not overstress nor understress the terminal barrel — machined dies fully bottom to the precise crimp height**
- **Resulting termination is free of contamination**
- **Resistant to most shock and critical environments**
- **Tensile strength approaches that of the wire itself**

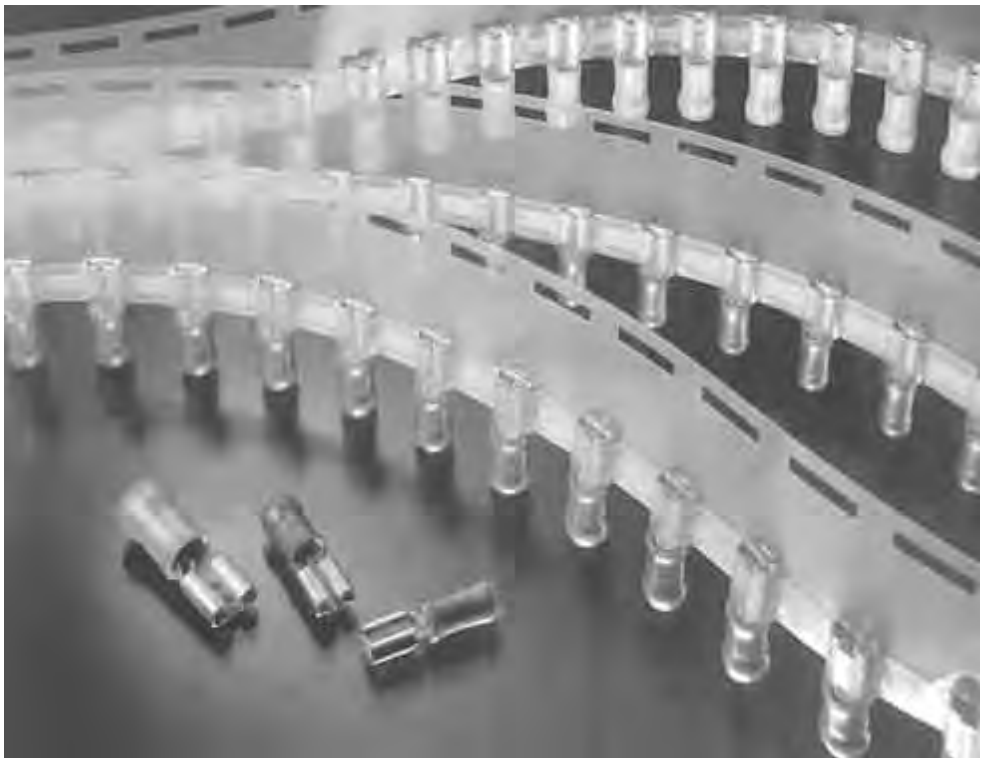

Here is a pre-insulated terminal designed for complete and uniform reliability in most difficult circuit environments. Each PIDG Terminal consists of a tin plated brass body with a specially designed copper sleeve and insulation sleeve fitted over the terminal barrel. The design of the tool dies and the construction of the terminal promotes uniform insulation thickness under crimping pressure, transmitting this pressure evenly to the center of the crimp area.

TE compression crimping produces crimps for a given size wire and terminal that are precisely alike in appearance and performance. This is a calculated result made possible by designing the terminal and the crimping tool as precisely matched devices. The dies are precision-engineered from the finest hard-metal alloys. Crimping pressure is controlled by a ratchet device on the hand tool or a corresponding pre-calibration in the crimping jaws of TE automated crimping machines.

Crimping pressure can neither over-stress nor understress the terminal barrel — machined dies fully bottom to the precise crimp height required.

The resulting termination is free of contamination, is resistant to shock and critical environments, and its tensile strength approaches that of the wire itself.

Temperature Rating: 105° C

Wire Range	E66717 Recognized	LR7189 Certified
22-16	22-16 Stranded	300 V Max., 105°C Max.[1]
16-14	16-14 Stranded	
12-10	12-10 Stranded	

[1] UL and CSA — Nylon.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

PIDG FASTON Receptacles and Tabs (Continued)

Receptacles

Receptacle Style

A — No dimple with wire stop

B — Dimple with wire stop

C — No dimple, no wire stop

Material

Insulation — Nylon

Receptacle Body — Brass per ASTM B-36 or phosphor bronze per ASTM B-139

Plating — Tin per MIL-T-10727 except where noted.

Metallic Sleeve — Copper per ASTM B-152

Plating — Tin per MIL-T-10727

Related Product Data

Application Tooling — reference Catalog 82042 for tooling

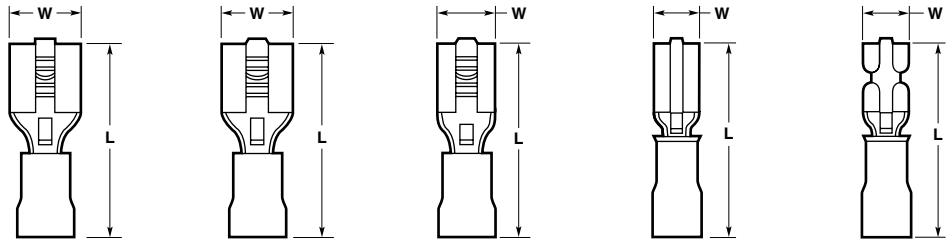

.250 Series | **.205 Series** | **.187 Series** | **.110 Series- Standard** | **.110 Series- Low Insertion**

Series	Wire Size Circular Mils [mm²]	Style	Dimensions W Nom.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Recept. Matl.	Stock Thk.	Fits Tab Thk.	Part Numbers Loose Piece	Part Numbers Tape Mounted	Part Numbers Strip Form
.250	22-18 509-1,900 [0.26-0.96]	B	**.300** 7.62	**.900** 22.86	Red	**.140** 3.56	Brass	**.018** 0.46	**.032** 0.81	640903-1*	640903-2	640902-1
					Red	**.140** 3.56	Brass	**.018** 0.46	**.032** 0.81	55675-1[2]	55675-2[2]	—
	16-14 2,050-5,180 [1.04-2.62]	B	**.300** 7.62	**.900** 22.86	Blue	**.170** 4.32	Brass	**.018** 0.46	**.032** 0.81	640905-1*	640905-2	640904-1
	14-12 3,831-6,470[1] [1.94-3.28]	B	**.300** 7.62	**1.012** 25.70	Green	**.250** 6.35	Brass	**.018** 0.46	**.032** 0.81	42844-1*†	42844-3†	60544-3†
					Green	**.250** 6.35	Phos. Brz.	**.018** 0.46	**.032** 0.81	42844-2*†	—	—
	12-10 5,180-13,100 [2.62-6.64]	B	**.300** 7.62	**1.012** 25.70	Yellow	**.250** 6.35	Brass	**.018** 0.46	**.032** 0.81	640907-1*	640907-2	640906-1
					Yellow	**.250** 6.35	Phos. Brz.	**.018** 0.46	**.032** 0.81	61198-2[3]†	61198-4[4]†	61197-2
.250 Low Insertion	22-18 509-1,900 [0.26-0.96]	B	**.300** 7.62	**.900** 22.86	Red	**.145** 3.68	Brass	**.016** 0.41	**.032** 0.81	184262-1†	184262-2†	184261-1†
	16-14 2,050-5,180 [1.04-2.62]	B	**.300** 7.62	**.900** 22.86	Blue	**.173** 4.39	Brass	**.016** 0.41	**.032** 0.81	184265-1†	184265-2†	184264-1†
.205 Low Insertion	22-18 509-1,900 [0.26-0.96]	B	**.250** 6.35	**.800** 20.32	Red	**.135** 3.43	Brass	**.016** 0.41	**.020** 0.51	696018-1†	696018-2†	—
.205	22-18 509-1,900 [0.26-0.96]	B	**.250** 6.35	**.800** 20.32	Red	**.140** 3.56	Brass	**.016** 0.41	**.020** 0.51	640909-1*	640909-2	640908-1
					Red/Black	**.140** 3.56	Brass	**.016** 0.41	**.020** 0.51	640174-1	—	—
					Red	**.140** 3.56	Brass	**.016** 0.41	**.032** 0.81	640911-1*	640911-2	—
	16-14 2,050-5,180 [1.04-2.62]	B	**.250** 6.35	**.800** 20.32	Blue	**.170** 4.32	Brass	**.016** 0.41	**.020** 0.51	640913-1*	640913-2	—
					Blue	**.170** 4.32	Brass	**.016** 0.41	**.032** 0.81	640915-1*	640915-2	—
.187	26-24 238-475 [0.12-0.24]	B	**.230** 5.84	**.700** 17.78	Yellow	**.082** 2.08	Brass	**.016** 0.41	**.020** 0.51	641321-1*†	641321-2†	641320-1†
	22-18 509-1,900 [0.26-0.96]	B	**.230** 5.84	**.800** 20.32	Red	**.140** 3.56	Brass	**.016** 0.41	**.020** 0.51	640917-1*	640917-2	640916-1

† Not UL or CSA approved or listed.
* Available in small packaging quantities.
[1] Wire range is limited as noted.
[2] Unplated receptacle body.
[3] Requires tool 90276-2
[4] Requires die 58541-1

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

PIDG FASTON Receptacles and Tabs (Continued)

Receptacles (Continued)

Series	Wire Size Circular Mils [mm²]	Style	Dimensions W Nom.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Recept. Matl.	Stock Thk.	Fits Tab Thk.	Part Numbers Loose Piece	Part Numbers Tape Mounted	Part Numbers Strip Form
.187	16-14 2,050-5,180 [1.04-2.62]	B	**.230** 5.84	**.800** 20.32	Blue	**.170** 4.32	Brass	**.016** 0.41	**.020** 0.51	640919-1*	640919-2	640918-1
			.230 5.84	**.900** 22.86	Blue	**.250** 6.35	Brass	**.016** 0.41	**.032** 0.81	696108-1†	696108-2†	—
	16-14 509-1,900 [0.26-0.96]	B	**.235** 5.84	**.800** 20.32	Blue	**.170** 4.32	Brass	**.016** 0.41	**.032** 0.81	184235-1†	184235-2†	—
.187 Low Insertion	22-18 509-1,900 [0.26-0.96]	B	**.230** 5.84	**.800** 22.86	Red	**.140** 3.68	Brass	**.016** 0.41	**.020** 0.51	696777-2	—	696776-1
									.032 0.81	184268-1†	184268-2†	184267-1†
.110 Standard	22-18 509-1,900 [0.26-0.96]	B	**.148** 3.76	**.734** 18.64	Natural	**.110** 2.79	Brass	**.012** 0.30	**.016** 0.41	61048-1*†	61048-2†	—
			.148 3.76	**.734** 18.64	Natural	**.110** 2.79	Brass	**.012** 0.30	**.020** 0.51	61060-1*†	61060-2†	61059-2†
			.148 3.76	**.734** 18.64	Natural	**.110** 2.79	Brass	**.012** 0.30	**.032** 0.81	60894-1*†	60894-2†	60893-2†
.110 Low Insertion	26-24 238-475 [0.12-0.24]	A	**.160** 4.06	**.700** 17.78	Yellow	**.082** 2.08	Brass	**.016** 0.41	**.020** 0.51	641324-1†	641324-2†	—
	22-18 509-1,900 [0.26-0.96]	A	**.160** 4.06	**.796** 20.22	Red	**.140** 3.56	Brass	**.016** 0.41	**.012** 0.30	—	—	350871-1†
			.160 4.06	**.800** 20.32	Red	**.140** 3.56	Brass	**.016** 0.41	**.016** 0.41	640921-1	640921-2	—
									.020 0.51	640923-1*	640923-2	640922-1
									.032 0.81	640925-1*	640925-2	640924-1
	16-14 2,050-5,180 [1.04-2.62]	A	**.160** 4.06	**.800** 20.32	Blue	**.170** 4.32	Brass	**.016** 0.41	**.020** 0.51	640929-1*	640929-2	—
									.032 0.81	640931-1*	640931-2	—
		B	**.160** 4.06	**.800** 20.32	Blue	**.170** 4.32	Brass	**.016** 0.41	**.016** 0.41	640927-1	640927-2	—

†Not UL or CSA approved or listed.
*Available in small packaging quantities.

Tooling for Insulated FASTON Receptacles and Tabs — 26 to 10 AWG Wire Range

Wire Size	Hand Tool	Tools for Tape Mounted Terminations: Tape Dies for 69875 AMP-TAPETRONIC No Applicator Required	Tape Dies for AMP-O-LECTRIC[1] Model "G" Applicator 567200-3	Tape Dies for AMPOMATOR CLS III G, CLS IV Applicator 687658-1	Tools for Strip Form Terminations: AMPOMATOR CLS III G, CLS IV Applicators
26-24	48518-2	69877-2	69877-2	69877-2	—
22-18	59824-1	59826-1	59826-1*	59826-1	466788-3[2]
22-18 (Natural)	90185-1	90248-2	90248-2	90248-2	466554-3
16-14	59824-1	59827-1	59827-1*	59827-1	466789-3[2]
14-12	90246-1	90240-2	90240-2	90240-2	—
12-10	59824-1	59828-1	59828-1*	59828-1	466790-4[2]

*Only UL and CSA approved.
[1]AMP-O-LECTRIC model "K" 565435-5 uses applicator 567200-2.
[2]Die included with applicator.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

PIDG FASTON Receptacles and Tabs (Continued)

Positive Lock Receptacle

Low Insertion Force with Locking Device



Description	Wire Range	Ins. Dia. Max.	Dimensions W	Dimensions L	Dimensions E	Material and Finish	Part Number
For Tab .250 x .032	16-14	**.190** 4.83	**.362** 9.19	**.850** 21.59	**.315** 8.00	Tin Plated Brass	165536-1†

†Not UL or CSA approved or listed.

Tab



Description	Wire Range	Ins. Dia. Max.	Dimensions W	Dimensions L	Dimensions E	Material and Finish	Part Number
For Receptacle .250 x .032	22-18	**.157** 3.99	**.250** 6.35	**.866** 22.00	**.300** 7.62	Tin Plated Brass	696362-1
	16-14	**.197** 5.00	**.250** 6.35	**.866** 22.00	**.300** 7.62	Tin Plated Brass	696369-1
	12-10	**.256** 6.50	**.250** 6.35	**.950** 24.13	**.300** 7.62	Tin Plated Brass	696372-1

PIDG FASTON Flag Receptacles



Description	Wire Range	Ins. Dia. Max.	Dimensions W	Dimensions L	Dimensions E	Material and Finish	Part Number
For Tab .250 x .032	22-18	**.134** 3.40	**.300** 7.62	**.720** 18.29	**.610** 15.49	Tin Plated Brass	156667-1
	16-14	**.157** 3.99	**.300** 7.62	**.720** 18.29	**.610** 15.49	Tin Plated Brass	156666-1

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

PIDG FASTON Receptacles and Tabs (Continued)

Fully Insulated Receptacles

Insulation Sleeve — Nylon



Description	Wire Range	Ins. Dia. Range	Dimensions W	Dimensions L	Material and Finish	Part Number
For Tab .250 x .032	22-18	**.128** 3.25	**.375** 9.53	**.891** 22.63	Tin Plated Brass	696357-1
	16-14	**.165** 4.19	**.375** 9.53	**.881** 22.38	Tin Plated Brass	696366-1
	12-10	**.225** 5.72	**.375** 9.53	**.998** 25.35	Tin Plated Brass	696371-1

Budget Line PIDG FASTON Receptacles

Material

Insulation — PVC, UL 94V-0
Receptacle Body — Brass
Plating — Tin
Metallic Sleeve — Copper
Plating — Tin



Series	Wire Size Circular Mils [mm²]	Dimensions W Nom.	Dimensions L Nom.	Terminal Color	Wire Insulation Diameter Max.	Fits Tab Thk.	Part Numbers Loose Piece	Part Numbers Tape Mounted
.250	22-18	**.300** 7.62	**.819** 20.80	Red	**.150** 3.81	**.032** 0.81	696301-1	696301-2
	16-14	**.300** 7.62	**.819** 20.80	Blue	**.185** 4.70	**.032** 0.81	696302-1	696302-2

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Application Tooling

AMP-O-LECTRIC Model "G" Termination Machines



A totally new design of our most popular machine for bench-top operation. It features a quiet and highly-reliable direct motor drive, electronic controls for ease of setup and operation, and improved guarding and lighting for operator convenience and safety. All versions also include either manual or automatic precision adjustment for crimp height. For use with miniature style applicators only.

Specifications

Weight — Approximately 240 lb [110 kg]

Height — 20 [508] without reel

Width — 18.7-25.3 [475-643] depending on type of applicator used

Depth — 21.5-28.1 [546-713] depending on type of applicator used

Electrical — 120 or 220 VAC, 50 or 60 Hz

Air — 90-110 psi [6.21-7.59 bar] when required for use with air-feed applicators

For complete information, request Catalog 65828.

AMP-3K/40 and AMP-5K/40 Terminating Machines



The AMP-3K/40 and AMP-5K/40 terminators are designed for customers that require the increased output and quality of a semiautomatic machine at a competitive price. By incorporating the most commonly requested features as standard and offering a long list of optional equipment, these terminators offer flexibility to meet the specific needs of various applications at the lowest possible cost.

- 3,000 lb [1361 kg] max. crimp force (AMP-3K/40) 5,000 lb [2268 kg] max. crimp force (AMP-5K/40)
- Tool-less removal of applicators and guards
- Jog capability
- Quiet, fast operation — 80/76 dBa and cycle time less than 0.400 seconds
- Accepts heavy duty mini style applicators
- Wide range of optional equipment such as tool-less precision crimp height adjust, batch counter, CQM capability and work light
- Order Catalog 1654856 for specs and part numbers

Specifications

Height — 20 [510] (without reel support)

Weight — Approx. 150 lb [68 kg]

Capacity — AMP-3K/40 — 3,000 lb [1361 kg] max. crimp force; AMP-5K/40 — 5,000 lb [2268 kg] max. crimp force

Noise — 76 dBa maximum at 3,000 lb [1361 kg] full capacity; 80 dBa maximum at 5,000 lb [2268 kg] full capacity

Electrical — 100-240 VAC, 50/60 Hz (6A) • Average <1 A at 120 VAC when used as a bench-top unit at 2 000 cycles per hour operating rate

Air — 90-100 psi [6.21-6.90 bar], 6 scfm [0.00282 m^3/s] (when required for use with air-feed applicators)
Note: Optional Air Feed Valve Assembly required.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Application Tooling (Continued)

Optional Stripping Module for the AMP-3K/40, AMP-5K/40 and AMP-O-LECTRIC Model G



The combination of the stripping module with the AMP-O-LECTRIC model G terminator or the AMP 3-K/40, AMP 5-K/40 provides an economical, proficient method of stripping wire and crimping terminals on the same machine. Wires are stripped moments before crimping, meaning there is virtually no chance of damaging wire conductors during handling or storage. Once the wire is fed into the start sensor the stripping module does the rest, improving placement accuracy.

For more information, request Catalog 1309085.

Crimp Quality Monitor (CQM)



Product Features

- Real-time monitoring of every crimp
- Effective for monitoring the wire barrel crimp of open barrel, uninsulated contacts and terminals
- Calculation and display of actual crimp height, force and position graphs
- Touch screen graphical user interface
- Network access with web interface
- Automatic adjustment of crimp height on enabled terminators
- Multiple language support

Crimp height is the accepted method for the most accurate and precise, non-destructive testing of crimp quality. The Crimp Quality Monitor is a convenient, automatic, easy-to-use tool for measuring crimp height as part of a comprehensive quality management program.

On-screen programmability allows flexible determination of crimp parameters and quality ranges. These monitors are compatible with several machines, including the AMP-O-LECTRIC model G terminating machine and the 3K/40 and 5K/40 terminators.

The TE CQM units utilize a technology which is constantly measuring both ram position and force throughout the crimp cycle. As many as 3,000 data points are gathered at a 5kHz sampling rate and analyzed on every crimp in real time. The CQM then compares the measured force/displacement curve to the base line to ensure that the forces and distances are within specification, thereby indicating a good crimp. Other systems make a force vs. time measurement.

For more information, request Catalog 82275.

AMP-TAPETRONIC Machine, Part Number 69875



The AMP-TAPETRONIC machine is an AMP-O-LECTRIC model “K” terminating machine with a permanently-mounted applicator that accepts interchangeable die sets to apply a variety of tape-mounted terminals and splices. Many of the die sets can also be used in AMP-O-LECTRIC terminating machines with a tape applicator.

For more information, contact TE.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Application Tooling (Continued)

Gamma 333 PC Lead-Making Machine, Three Stations



With its capacity to accommodate an additional processing station on side 1, the Gamma 333 PC can perform a number of new processes. It can produce two-ended crimp leads, process double crimp connections with three different terminals or apply seals on one end of the wire. Tinning and ink jet marking are two further options. Process monitoring is integrated into the system, ensuring perfect trimming and stripping of the wires.

Specifications

Length — 125 [3137]

Width — 54.2 [1377]

Height — 70.5 [1790]

Length Range — 2.36 in-32.8 ft [60-10,000] (optional 30mm)

Cross-Section Range — AWG 26-AWG 10 [0.125mm^2-5mm^2]

Noise Level — <76dB (without crimping modules)

Electrical — 3x208 - 480V, 50-60Hz; 6kVA

Compressed Air — 5-6 bar

Air Consumption — 6.5m^3/h

Weight — 1850 lbs [840 kg] with two crimping modules

For more information, request Catalog 1307901.

AMPOMATOR System III Leadmaker



- Flexible and efficient terminating system
- Single and double wire applications
- User friendly & proven subsystems and accessories
- Meets the demanding requirements of the automotive and appliance industries
- Available with the new AMP-O-LECTRIC ST III terminator
- Accepts various accessories
- SLE crimp quality monitoring
- Choose either Komax or PAWOMAT seal application module

Specifications

Length Range — 60mm - 650m [2.36-2133"] Optional from 35mm [1.38"]

Length Accuracy — ± 1mm [0.04"] or < 0.2% depending on wire length

Stripping Lengths — 0.1-15mm [0.004-0.591"]

Wire Sizes — 24-10 AWG [0.20 -6mm^2]

Wire Draw-In Speed — 10 m/s max.

Electrical Power — 3 phase, 208-480 V / 50-60 Hz

Weight — 1080 kg [2,381 lb]

Dimensions — 3988 x 1702 x 2006 mm [157 x 67 x 79"] L x W x H

Air Pressure — 5-6 bar [73-87 PSI]

Air Volume — 9 m^3/hr [5.3ft^3/min]

Noise — < 75 db without crimping modules

For more information, request Catalog 1654956-5.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Application Tooling (Continued)

P300 and P350 Automatic Insertion Machines



Automatic insertion machines for the application of reeled pins, tabs and receptacles. Available with up to 3 insertion heads to apply different products. The PCB is positioned by an XY table powered by stepper-motors (optional servo drives for higher insertion rates). Available in stand-alone or inline (SMEMA) configuration for fully automatic operation. Optional equipment includes insertion force monitoring, vision system, board thickness measurement and adjustable lower anvil.

Specifications

Width — 57.5 [1,460]
Depth — 64.5 [1,640]
Height — 60 [1,520]
Weight — Depending on configuration
Electrical — 110 V, 60 Hz
Air — 87 psi [6 bar]
Insertable Area — 24 x 16 [600 x 400]

For more information, contact TE.

AccuSerter 2 Pin Insertion Machine



Product Features

- Board capacity of 305 x 450 mm [12 x 18"]
- X/Y-Table with stepper motors
- Database driven software for simple programming and automatic setup
- "Quick change" tooling packs allow easy and fast setup
- Wide range of tooling packs for TE and non TE products available
- Easy-to-use operator interface

Designed and manufactured with a focus on mid-volume level production, the AccuSerter 2 machine provides a broad range of features at a very competitive price. It uses a pneumatic power unit together with product specific "quick change" tooling packs. The insertion heads can be equipped with a rotary insertion finger that can apply products at different angles without decreasing the insertion rate. The tooling packs can be exchanged within 30 minutes to meet your full range of application requirements.

The lower support tool is equipped with an electrical continuity or pin penetration check to assure that each product was correctly inserted into the PCB and remained there in real time. There is no additional quality check required and all QC data can be stored via the system PC for 100% future traceability.

Note: The AccuSerter 2 machine is not CE approved.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Application Tooling (Continued)

BT3500 Battery Hydraulic Hand Tool, Part Number 2031400-x



Product Facts

- Highly Portable
- Lightweight
- Ergonomic
- Compatible with SDE dies and CERTI-CRIMP II heads
- New “quick take-up” feature
- Approximately 250 crimps per charge
- Generates up to 3500 lbs of crimp force.

The BT3500 battery-hydraulic hand tool kit is designed to provide the ultimate in flexibility, modularity, and powered efficiency in a lightweight, ergonomic, powerful crimp unit powered by a superior lithium ion battery.

The BT3500’s flexibility begins with the many user options for the power unit. It can be used with two shoulder strap options (including a 4-point harness or a single shoulder strap) or a belt option, or by using the shoulder strap on the BT case, or used as a portable bench top termination device positioned in the tool case. These six combinations allow you to tailor portable, powered crimping to your manufacturing needs.

For more information, request Catalog 1773381-5.

Options



4-point Harness (for use with padded belt)



Shoulder Strap



Belt



Shoulder Strap with Case

Double Action Hand Tool (DAHT)



- Dies travel in arc-like path
- Locator on tools for FASTON, MATE-N-LOK, PIDG and PLASTI-GRIP terminals
- Insulation adjustment on tools for FASTON, MATE-N-LOK, PIDG and PLASTI-GRIP terminals
- Approximate weight 1.2 lb [0.54 kg]

Double Action Hand Tool Adapter, Part Number 2119483-1 (For use with BT3500 Battery Tool)



626 Pneumatic

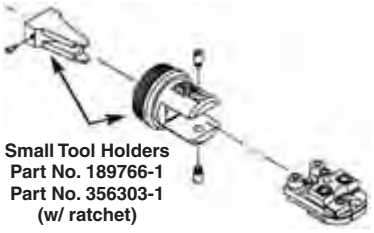

Small Tool Holders
Part No. 189766-1
Part No. 356303-1 (w/ ratchet)

2614 Series (CE)

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Application Tooling (Continued)

SDE Hand Tool Frames



PRO-CRIMPER III,
Part Number 354940-1
(Frame Only)

C-Head Assembly for Closed Barrel Terminals (Shoulder Dies), Part Number 2031450-1 (for use with BT3500 Battery Tool)



SDE C-Head,
Part Number 2031450-1

626 Pneumatic



6-26 SDE Kit
Part Number 1213855-1

Closed Head Assembly for Open Barrel Terminals (Pin & Shoulder Dies), Part Number 2031460-1 (for use with BT3500 Battery Tool)



SDE Closed Head,
Part Number 2031460-1

SDE Electric Terminator



Part Number
1490076-2

Platform Die Hand Tool, Part Number 58078-3 Frame Only



- Same frame configuration as TETRA-CRIMP hand tool
- Dies are interchangeable
- Adjustable terminal locator
- Approximate weight 1.4 lb [0.64 kg]
- For use with Ultra-Fast and Ultra-Fast Plus product (Die set required to terminate contacts)

626 Pneumatic

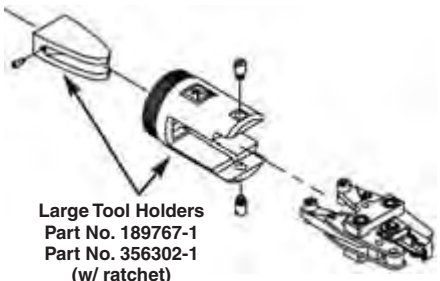

Large Tool Holders
Part No. 189767-1
Part No. 356302-1
(w/ ratchet)

Platform
Die Set Adapter
Part No. 679992-1

TETRA-CRIMP Hand Tool, Part Number 59824-1



- Dies travel in arc-like path
- Multiple color-coded crimping cavities
- Terminal locator and wire stop
- Ratchet control release
- Approximate weight 1.4 lb [0.64 kg]
- For use with closed barrel FASTON product

626 Pneumatic

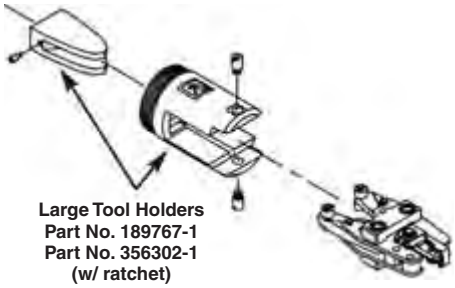

Large Tool Holders
Part No. 189767-1
Part No. 356302-1
(w/ ratchet)

TETRA-CRIMP
Die Set Adapter
Part No. 679305-1

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Application Tooling (Continued)

Universal Handle, Part Numbers 465629-1 (Short) and 465629-2 (Long)



This tool with interchangeable tips is used to mate standard and tab-lok flag FASTON receptacles to tabs. It features an adjustable strap. The short tip holder is 1.87 [47.5], the long is 5.87 [149]. For further information, request Instruction Sheet 408-7141.

Model 626 Pneumatic Tool



This modular system consists of a hand- or foot-actuated power unit plus interchangeable tool holders, crimp head assemblies, and die sets, when applicable. It is light weight, and features an optional positive-cycle control that helps eliminate partial crimps. The tool can be easily held or bench mounted.

Specifications

Weight — 2.3-3.3 lb [1.0-1.5 kg]

Length — 11.6-12.9 [295-327]

Outside Diameter — 1.83 [46.5]

Grip Span — 2.19 [55.6] over button or handle

Air — 90-100 psi [6.21-6.89 bar], 11.4 in^3 [0.00018 m^3] displacement

Cycle Time — 0.7-0.8 sec (16-14 AWG [1.3-2 mm^2] PIDG Terminals)

For further information, request Catalog 124208.

Note: All part numbers are RoHS compliant.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Technical Documents

Various technical documents are available for your use:

Production Specifications describe technical performance, characteristics and verification tests. They are intended for the Design, Component and Quality Engineer.

108-1285	Ultra-Pod Fully Insulated FASTON Receptacles
108-1706	250/205 Srs FASTON PCB Receptacles
108-2000	.250 Hermetic
108-2002	.187 Modular FASTIN-FASTON
108-2017	Ultra-Fast FASTON Tabs
108-2043	Ultra-Fast FASTON Receptacles
108-2044	Ultra-Fast Plus FASTON Receptacles
108-2086	187 Srs AMPLIVAR FASTON Flag Receptacles
108-2183	RAST 5 Headers
108-2215	Ultra-Pod Fully Insulated .187 Flag FASTON Receptacles
108-3017	Positive Lock Mark I
108-5126	.187 Positive Lock Mark II
108-5127	.250 Positive Lock Mark II

Application Specifications describe requirements for using the product in its intended application and/or crimping information. They are intended for the Packaging Design Engineer and the Machine Setup Person

114-1002	Pre-Insulated Diamond Grip (PIDG) FASTON Receptacle Contacts
114-2025	FASTIN-FASTON Receptacle and Tab Contacts, 250 Series
114-2028	Flag Receptacle Contacts, .110 Series
114-2032	Reversible Flag, 250 Series
114-2036	FASTON Receptacle Contacts, All Series (110, 187, 205, 250 and 312)
114-2065	FASTIN-FASTON Receptacle Contacts, All Series (110, 187, 205, 250 and 312)
114-2070	AMPLIVAR FASTON Tab Contact
114-2074	Positive Lock Receptacle Connectors — Series 187 MK II and MK III Series 250 MK II, MK III, and RAST 5
114-2078	FASTON Tab-Lok Contacts, 187, 205 and 250 Series
114-2079	F-Crimp Flag Receptacle
114-2082	Piggyback Flag Tab, All Series
114-2097	High-temperature FASTON Tab
114-2115	FASTON 110, 187, 205, 250, and 312 Series Tab Contacts for Printed Circuit (PC) Board Applications
114-2123	Ultra-Fast, Ultra Fast Flag and Ultra-Fast Plus FASTON Terminals
114-2124	Ultra-Pod FASTON Fully Insulated Receptacles and Tabs
114-2126	Center Strip Flag FASTON
114-2144	AMPLIVAR Receptacles, All Series
114-2146	AMPLIVAR F-F Tabs
114-2152	187 Srs AMPLIVAR FASTON Flag Receptacles
114-2153	Positive Lock Mark I Receptacle Connectors, .250 Series
114-2155	187 Srs FASTON C-Crimp Receptacles
114-2156	250/205 Srs FASTON PCB Receptacles
114-35000	Wire Preparation and Crimp Inspection Guide

Instruction Sheets provide instruction for assembling or applying the product. They are intended for the Manufacturing Assembler or Operator.

Instruction Material covering operation, setup, maintenance, repair, etc. is included with each machine, tool or die set. If this material is required prior to receiving your tooling, call the TE Customer Service Hotline 800-722-1111 for the applicable document.

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Part Number Index

Note: This index lists all cataloged parts by base no. only. Complete part nos. (with prefixes and/or suffixes) are shown on the page(s) indicated.

Part No.	Page
41143	15
41194	15
41202	12
41274	12, 74
41290	38
41291	38
41292	38
41339	37
41370	38
41398	37
41411	33
41412	33, 74
41449	13
41450	13, 74
41478	37
41480	38
41481	38
41482	38
41484	37
41531	15
41532	15, 74
41617	37
41619	38
41727	13
41728	13, 74
41729	74
41771	11
41772	11, 74
41774	13, 74
41778	74
41800	16
41801	16
41802	16
41898	74
42021	74
42025	74
42041	16
42067	26
42068	26, 74
42095	37
42100	62, 74
42115	38
42117	37
42197	20
42198	20
42199	20
42214	37
42219	12, 74
42233	20
42234	20
42236	26
42238	74
42239	20
42281	62, 74
42282	74
42299	20
42373	21, 74
42374	21
42398	27
42399	27
42400	12
42404	15
42415	26
42437	13
42452	21, 74
42452	21
42453	21
42460	62, 74
42470	74
42474	33
42475	33
42486	24
42490	34
42506	37
42510	11
42511	15
42559	36
42563	16
42565	74
42566	74
42579	13
42580	62
42617	22
42618	24
42638	74
42640	11
42660	12
42692	12
42710	20
42712	20
42713	20
42742	15, 74
42743	11
42770	33
42781	20
42799	22
42800	24
42801	22
42802	38
42822	36
42844	100
42845	15
42845	15
55675	100
60080	38
60089	26
60102	74
60118	26
60195	20
60196	22
60197	26
60214	22
60249	62
60252	31
60253	62
60274	16
60279	74
60284	46
60290	74
60294	74
60295	62
60384	29
60385	29
60413	62
60415	26
60419	74
60432	31
60434	66
60435	66, 74
60443	41
60447	40
60465	36
60487	23
60520	74
60529	24
60544	100
60573	21
60577	26
60601	27
60605	28
60613	40
60621	21
60634	62
60635	13
60641	16
60645	16
60650	12
60674	20
60701	62
60705	74
60729	26
60742	23
60764	19
60794	65
60850	34
60851	16, 74
60878	74
60893	101
60894	101
60900	31, 74
60904	20
60920	41
60921	40
60922	40
60938	15
60991	28
61029	24
61045	42
61048	101
61059	101
61060	101
61070	28
61095	13
61107	12
61134	49
61156	15
61158	26
61177	17
61187	19
61188	19
61197	100
61198	100
61202	11
61227	74
61281	33
61316	74

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Part Number Index (Continued)

Part No.	Page
61362	33
61365	36
61368	11
61372	28
61375	12
61399	11
61400	27
61407	39
61408	27
61454	31, 74
61457	27
61459	28
61481	28
61499	36
61530	28
61549	28
61664	39
61687	34
61758	21
61761	39
61765	42
61810	42
61813	31
61818	26
61836	38
61892	22
61907	47
61914	39
61944	14, 74
61945	23
61951	39
61960	36
61968	49
61969	22
61971	28
61988	14, 74
62003	27, 74
62011	17
62016	23
62021	17
62022	17
62026	22, 74
62048	19
62049	74
62050	27
62056	17
62057	17
62061	41
62068	14
62069	29
62080	29
62090	74
62091	17
62092	11
62094	26
62109	14
62112	74
62122	34
62137	21
62138	21
62139	22
62166	37

Part No.	Page
62168	38
62181	21
62187	21
62191	27
62221	47
62223	14
62228	74
62253	14
62261	38
62274	74
62276	14
62298	41
62314	37
62321	28
62336	28
62352	31
62354	20
62384	34
62395	49
62409	44
62411	46
62428	14
62437	49
62445	35
62447	35
62474	27
62500	13
62523	26
62531	33
62553	62
62572	68
62576	39
62591	24
62627	40
62628	41
62650	44
62718	18
62751	46
62806	46
62813	18
62814	18
62817	24
62850	27
62852	27
62887	34
62922	35
62968	27
62998	14
63009	18
63010	18
63011	18
63012	18
63038	36
63066	44
63067	44
63093	27
63096	18
63097	78
63104	32
63127	11
63136	35
63137	19

Part No.	Page
63138	34
63223	33
63232	81
63239	78
63241	68
63242	27
63248	41
63274	40
63300	32
63301	32
63306	12
63313	81
63314	19
63315	19
63315	19
63316	25
63317	25
63347	21
63349	35
63365	13
63365	13
63390	32
63391	31
63407	81
63419	13
63435	13
63442	78
63445	16
63445	16
63470	23
63477	22
63497	34
63498	81
63508	18
63512	25
63522	32
63525	47
63537	12
63538	18
63539	13
63555	16
63560	27
63577	15
63596	23
63603	47
63604	16
63609	12
63617	16
63622	29
63623	29
63633	40
63634	26
63646	22
63647	19
63650	44
63651	16
63655	12
63674	12
63677	11
63688	12
63693	12
63696	24

Part No.	Page
63697	23
63699	42
63703	27
63705	26
63747	41
63748	24
63749	23
63751	22
63755	44
63756	49
63757	13
63761	33
63769	23
63771	36
63785	22
63809	78
63812	76
63820	11
63823	47
63824	45
63832	23
63837	26
63838	47
63839	44
63849	45
63850	21
63854	84
63860	47
63862	45
63873	21
63893	34
63896	13
63900	44
63901	18
63918	42
63931	21
63932	34
63933	84
63940	30
63941	30
63942	30
63944	30
63946	39
63949	45
63950	45
63951	46
63952	46
63954	26
63959	22
63961	27
63963	18
63968	46
63969	46
63971	37
63981	15
63982	47
63986	44
63990	28
63993	12
63994	46
151302	42
151321	19

Catalog 82004
Revised 3-11
Page Revised 9-14
www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Part Number Index (Continued)

Part No.	Page
152422	42
154717	76
154718	76
154719	76
156666	102
156667	102
160743	68
160759	76
160762	68
160914	62
163007	64
163008	64
165536	102
170324	81
170325	81
170326	81
170327	78
170328	78
170329	78
170823	54
170891	54
171706	53
172074	81
172075	57, 83
172076	78
172210	82
172469	80
172761	80
172763	80
172765	80
173974	81
174429	79
174513	83
174587	82
174712	57, 82
174777	86
174779	86
175032	83
175034	83
175164	83
175411	86
175578	82
176498	59, 82
177627	78
178833	79
179720	59, 82
180351	62
180900	63
180901	63
180907	61
180908	61
180923	61
180924	61
180940	63
180941	63
184235	101
184261	100
184262	100
184264	100
184265	100
184267	101
184268	101
280232	53
284861	73
284985	72
284986	72
293008	71
293009	71
293010	71
293011	71
293014	73
293015	73
293033	72
293034	72
293035	71
293043	72
293044	72
293161	71
336369	53
350815	91
350816	91
350819	91
350820	91
350871	101
353148	59, 82
360010	57
360040	53
360041	48
360042	48
480003	64
480004	64
480053	61
480054	61
480115	65
480116	65
480251	66
480252	66
480281	64
480282	64
480296	53
480298	53
480306	53
480307	53
480416	53
480417	54
480418	54
480435	54
480458	54
480487	53
520080	91
520081	91
520083	91
520084	91
520102	92
520103	92
520106	92
520107	92
520116	91
520117	91
520124	91
520125	91
520128	92
520129	92
520132	92
520133	92
520140	91
520141	91
520150	91
520151	91
520181	91
520182	91
520183	91
520184	91
520193	91
520194	91
520206	55
520212	57
520217	55
520219	55
520220	55
520261	91
520262	91
520263	91
520264	91
520272	91
520273	91
520274	91
520275	91
520276	91
520306	91
520310	91
520334	92
520335	92
520336	92
520337	92
520338	92
520339	92
520340	92
520365	91
520366	91
520370	91
520401	94
520402	94
520403	94
520404	94
520405	94
520406	94
520407	94
520408	94
520409	94
520410	94
520411	94
520412	94
520447	91
520448	91
520856	92
520895	76
520932	94
520935	58, 79
520961	76
520963	96
520971	97
520973	96
520974	96
520978	56
520979	94
520982	96
520987	55
520988	96
520997	92
521011	96
521013	92
521050	97
521053	53
521055	94
521057	94
521065	55
521066	55
521069	56
521070	56
521087	97
521097	92
521098	92
521102	92
521103	92
521104	92
521105	92
521112	97
521113	96
521119	58, 84
521120	84
521125	81
521140	56
521142	92
521144	92
521148	56
521164	92
521187	85
521191	92
521192	92
521198	85
521204	88
521205	88
521206	88
521207	88
521208	88
521209	88
521210	88
521212	98
521213	98
521217	98
521225	96
521227	98
521228	96
521229	58, 79
521247	92
521251	56
521253	58, 84
521267	88
521271	98
521282	97
521284	96
521289	61
521290	61
521293	96
521295	88
521306	57
521307	57

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Part Number Index (Continued)

Part No.	Page
521308	91
521317	98
521360	94
521361	94
521366	96
521367	96
521368	96
521382	51
521384	51
521406	91
521408	96
521411	97
521435	88
521436	96
521437	96
521451	98
521470	97
521471	97
521586	96
521596	97
521597	97
521598	97
521599	97
521600	97
521601	97
521632	96
521633	97
521637	96
521699	88
521743	61
521744	61
521746	88
521766	57, 84
521771	56
521780	85
521781	85
521782	88
521785	56
521792	88
521836	88
521935	88
521936	88
521955	57, 84
521995	96
521997	96
521998	96
626056	67
626057	67
626062	67
626063	67
626064	67
626065	67

Part No.	Page
626412	25
626541	63
640174	100
640416	65
640417	65
640418	65
640841	65
640902	100
640903	100
640904	100
640905	100
640906	100
640907	100
640908	100
640909	100
640911	100
640913	100
640915	100
640916	100
640917	100
640918	101
640919	101
640921	101
640922	101
640923	101
640924	101
640925	101
640927	101
640929	101
640931	101
641320	100
641321	100
641324	101
696018	100
696108	101
696301	103
696302	103
696357	103
696362	102
696366	103
696369	102
696371	103
696372	102
696776	101
696777	101
725963	49
725996	49
726308	42
735075	53
790319	76
880110	63
880310	61

Part No.	Page
925014	67
925015	67
925016	67
925475	67
926291	77
926521	76
926522	76
926790	77
926820	77
927742	71, 72
928230	71
928309	72
928814	46
964492	71
1217002	36
1217006	32
1217009	25
1217010	25
1217027	24
1217043	14
1217056	44
1217057	47
1217061	48
1217062	48
1217080	46
1217084	21
1217092	84
1217094	88
1217095	88
1217096	85
1217097	85
1217102	27
1217107	46
1217113	85
1217114	85
1217118	34
1217124	47
1217125	45
1217126	45
1217127	45
1217129	21
1217131	47
1217133	47
1217136	45
1217137	46
1217138	28
1217145	27
1217148	65
1217149	23
1217151	23
1217156	48
1217167	45

Part No.	Page
1217169	45
1217180	46
1217244	25
1217281	68
1217321	68
1217332	47
1217378	88
1217417	30
1217421	45
1217539	44
1217558	36
1217566	44
1217624	30
1217754	46
1217756	48
1217835	29
1217899	30
1217933	42
1217955	30
1241857	71
1241967	72
1241968	72
1241969	72
1742041	39
1742049	25
1742086	25
1742087	25
1742088	25
1742089	25
1742188	45
1742198	12
1742219	28
1742312	25
1742354	78
1742361	47
1742362	47
1742422	24
1742543	16
1742597	42
1742669	83
1742678	29
1742679	30
1742718	18
1969106	97
1969107	97
1969109	97
1969110	97
1969133	97
1969186	53
1969227	86
1969332	79
1969335	88

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Tooling Part Number Index

Note: This index lists all cataloged parts by base no. only. Complete part nos. (with prefixes and/or suffixes) are shown on the page(s) indicated.

Part No.	Page
47094	74
47417	74
48518	101
58078	109
59824	101, 109
59826	101
59827	101
59828	101
69875	105
69877	101
90045	74
90088	74
90120	74
90165	74
90185	101
90240	101
90246	101
90248	101
90276	100
91509	74
91511	74
91514	74
91557	74
189508	74
189766	108
189767	109
314916	95

Part No.	Page
314917	95
314919	95
354940	109
356302	109
356303	108
465629	110
466057	62
466058	62
466092	62
466542	76
466554	101
466704	65
466707	65
466788	101
466789	101
466790	101
466791	65
466883	76
525651	76
565435	62, 66, 101
567181	76
567200	101
567417	76
654174	76
679305	109
679992	109
680140	76

Part No.	Page
680645	85
680652	85
680653	88
680654	88
680808	65
687839	62
687888	65
687932	62
687940	62
687979	62
687981	62
687982	62
687993	66
687995	66
720725	74
1213805	108
1213855	109
1213860	108
1490076	109
1583527	108
1852165	88
2031400	108
2031450	109
2031460	109
2119483	108

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Engineering Notes

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Engineering Notes

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Engineering Notes

Catalog 82004
Revised 3-11

www.te.com

Dimensions are shown for reference purposes only. Specifications subject to change.

Dimensions are in inches and millimeters unless otherwise specified.
USA: +1 (800) 522-6752

Canada: +1 (905) 475-6222
Mexico/C. Am.: +52 (0) 55-1106-0800
Latin/S. Am.: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

te.com

© 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. Company. All Rights Reserved.
82004 CGX 3M LUG 03/2011 PDF 09/2014
TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners.

TE connectivity