DATASHEET


DC Gear Reduction Motor

Item No.: 3413225 (TC-NZD2580-24-6)
Item No.: 3413226 (TC-NZD2580-24-1.5)
Item No.: 3413227 (TC-NZD2580-12-25-25)
Item No.: 3413228 (TC-NZD2801-24-9)
Item No.: 3413230 (TC-NZD2580-24-5)
Item No.: 3413231 (TC-NZD2801-24-45-9)
Item No.: 3413232 (TC-NZD2580-24-3)
Item No.: 3413237 (TC-NZD2805-24-25-0.2)

Item No.	Nominal voltage	Nominal torque	Nominal speed	Nominal current	Starting torque	Starting current	Transmission ratio	Weight	Ingress protection	Wheel material
	Un (V)	Mn (N.m.)	Nn (r.p.m.)	In (A)	Ma (N.m.)	Ia (A)	i	(kg)	IP	Polyoxymethylene
3413225	24	6	25	2	25	8	62:1	1.2	53	POM
3413226	24	1.5	240	4	10	23	49:4	1.2	53	POM
3413227	12	6	25	4	25	15	62:1	1.2	53	POM
3413228	24	9	30	3	50	15	81:1	1.64	53	POM
3413230	24	5	40	2.5	25	13	62:1	1.2	53	POM
3413231	24	9	45	4.5	60	25	81:1	1.64	53	POM
3413232	24	3	70	3	25	17	62:1	1.2	53	POM
3413237	24	0.2	2000	3		12	/		53	POM


This is a publication by Conrad Electronic SE, Klaus-Conrad-Str. 1, D-92242 Hirschau (www.conrad.com). All rights including translation reserved. Reproduction by any method, e.g. photocopy, microfilming, or the capture in electronic data processing systems require the prior written approval by the editor. Reprinting, also in part, is prohibited. This publication represents the technical status at the time of printing. Copyright 2026 by Conrad Electronic SE.


Item No.: 3413225

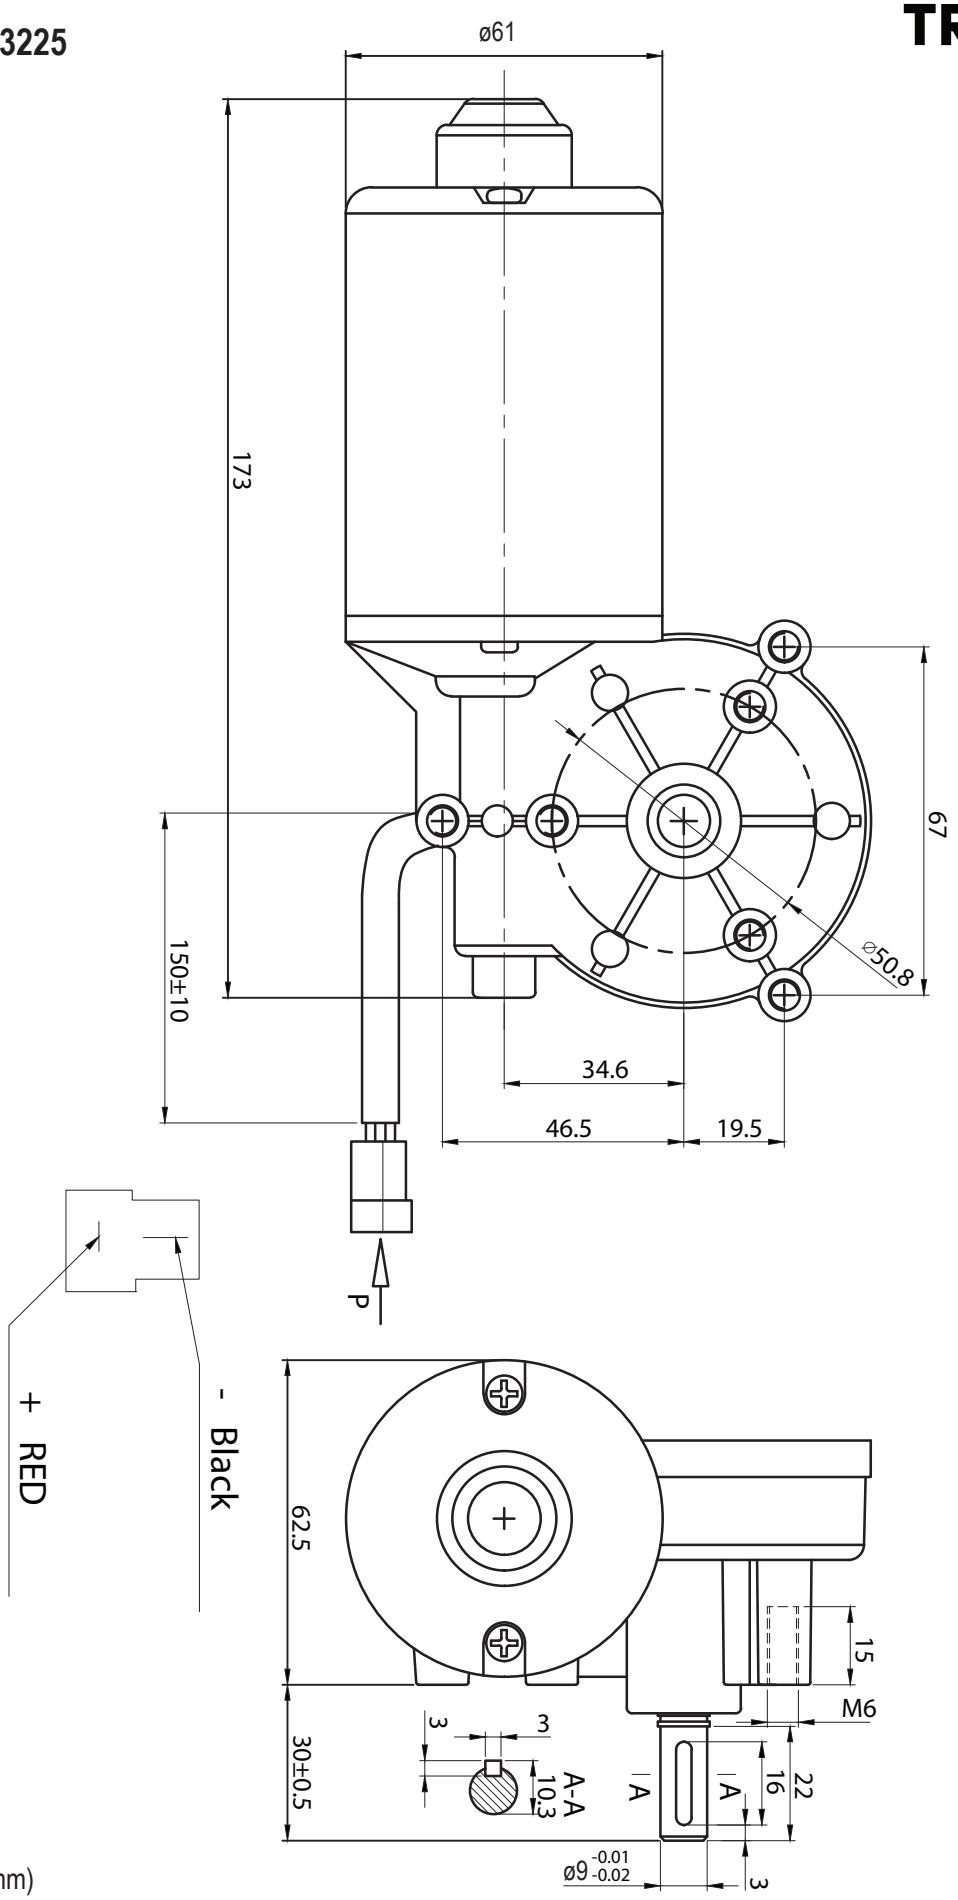

Dimensions in (mm)


Item No.: 3413226

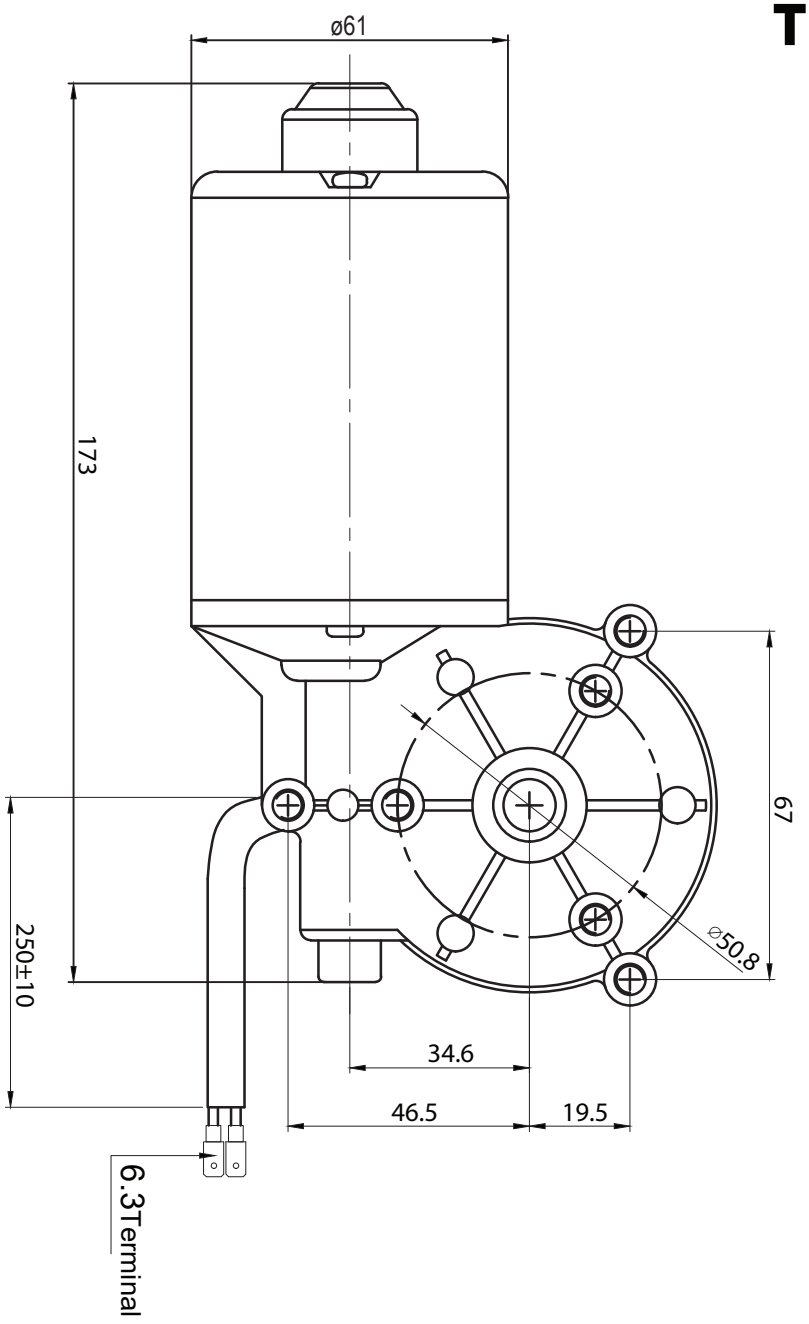

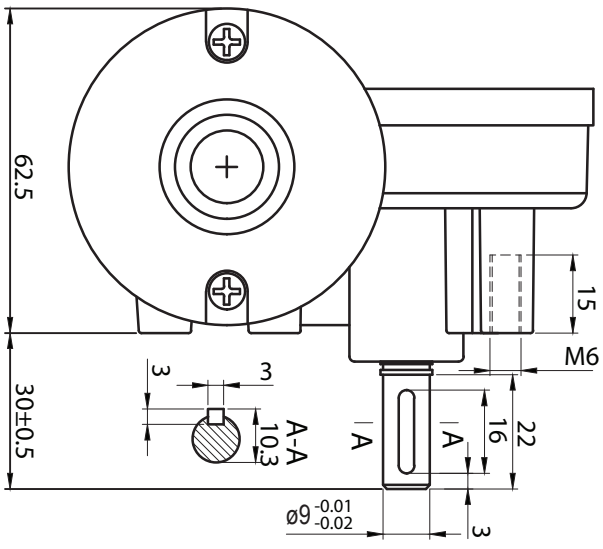


Dimensions in (mm)

Item No.: 3413227

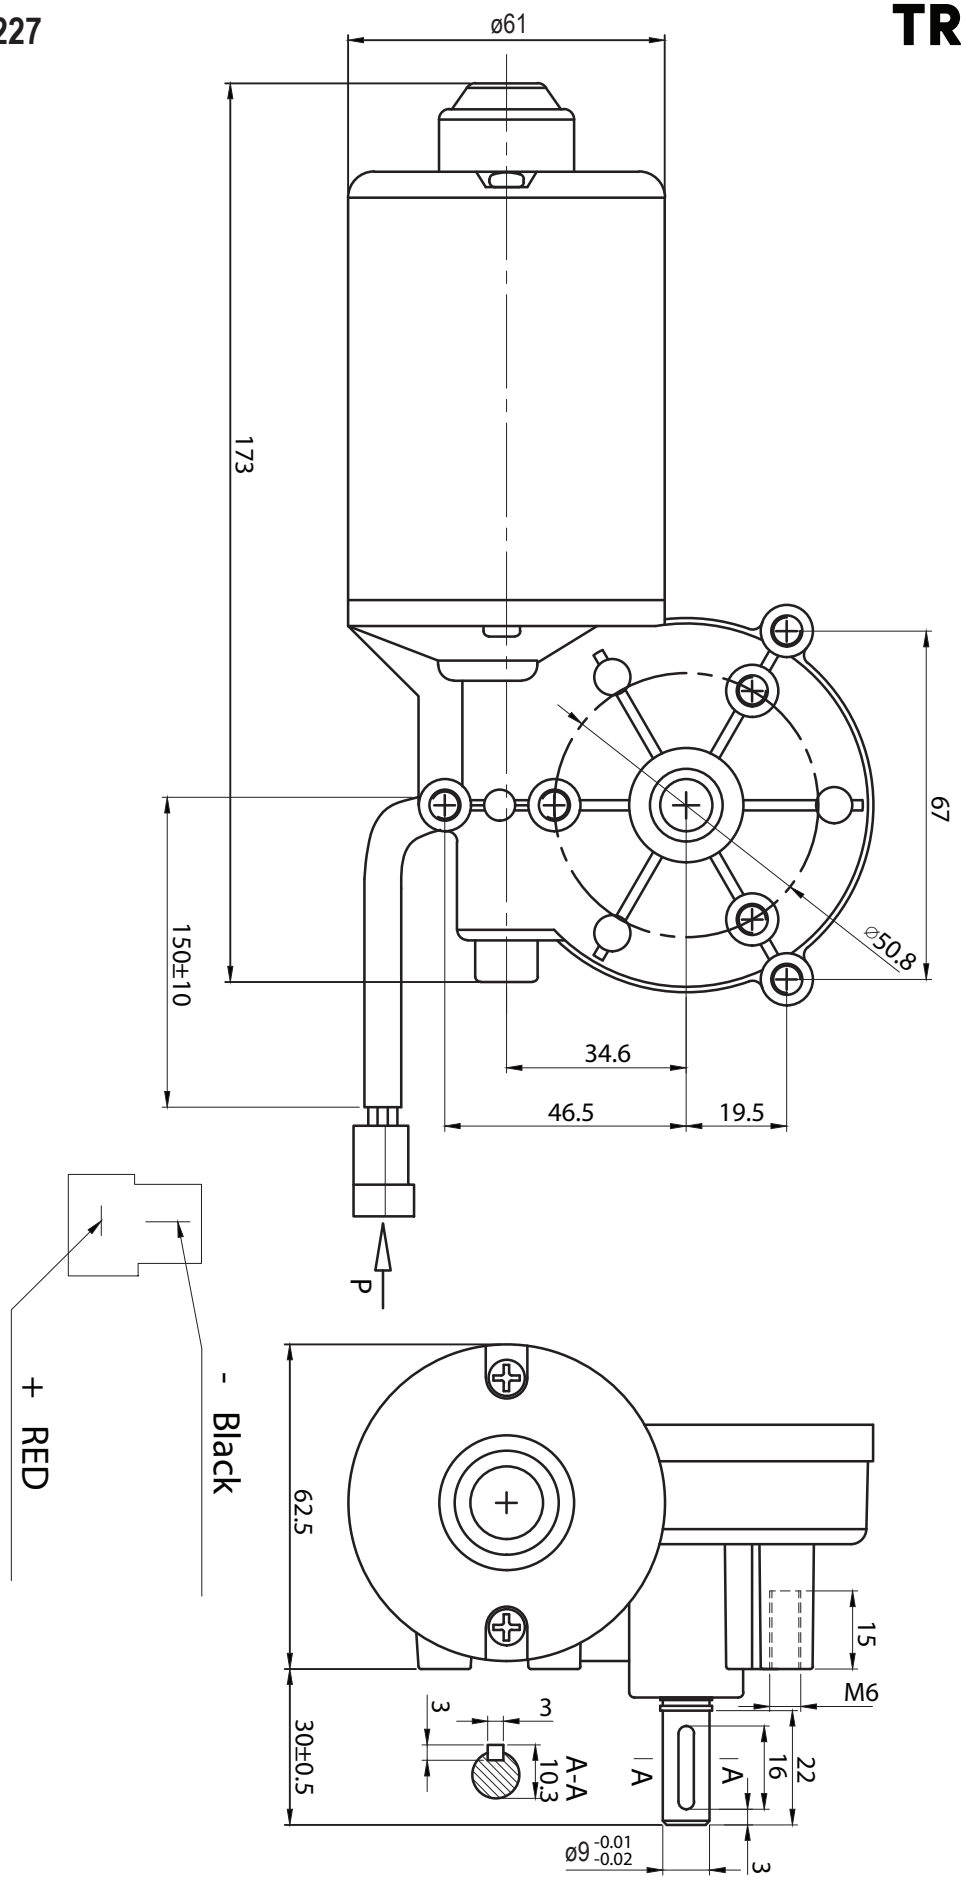


Dimensions in (mm)

Item No.: 3413228

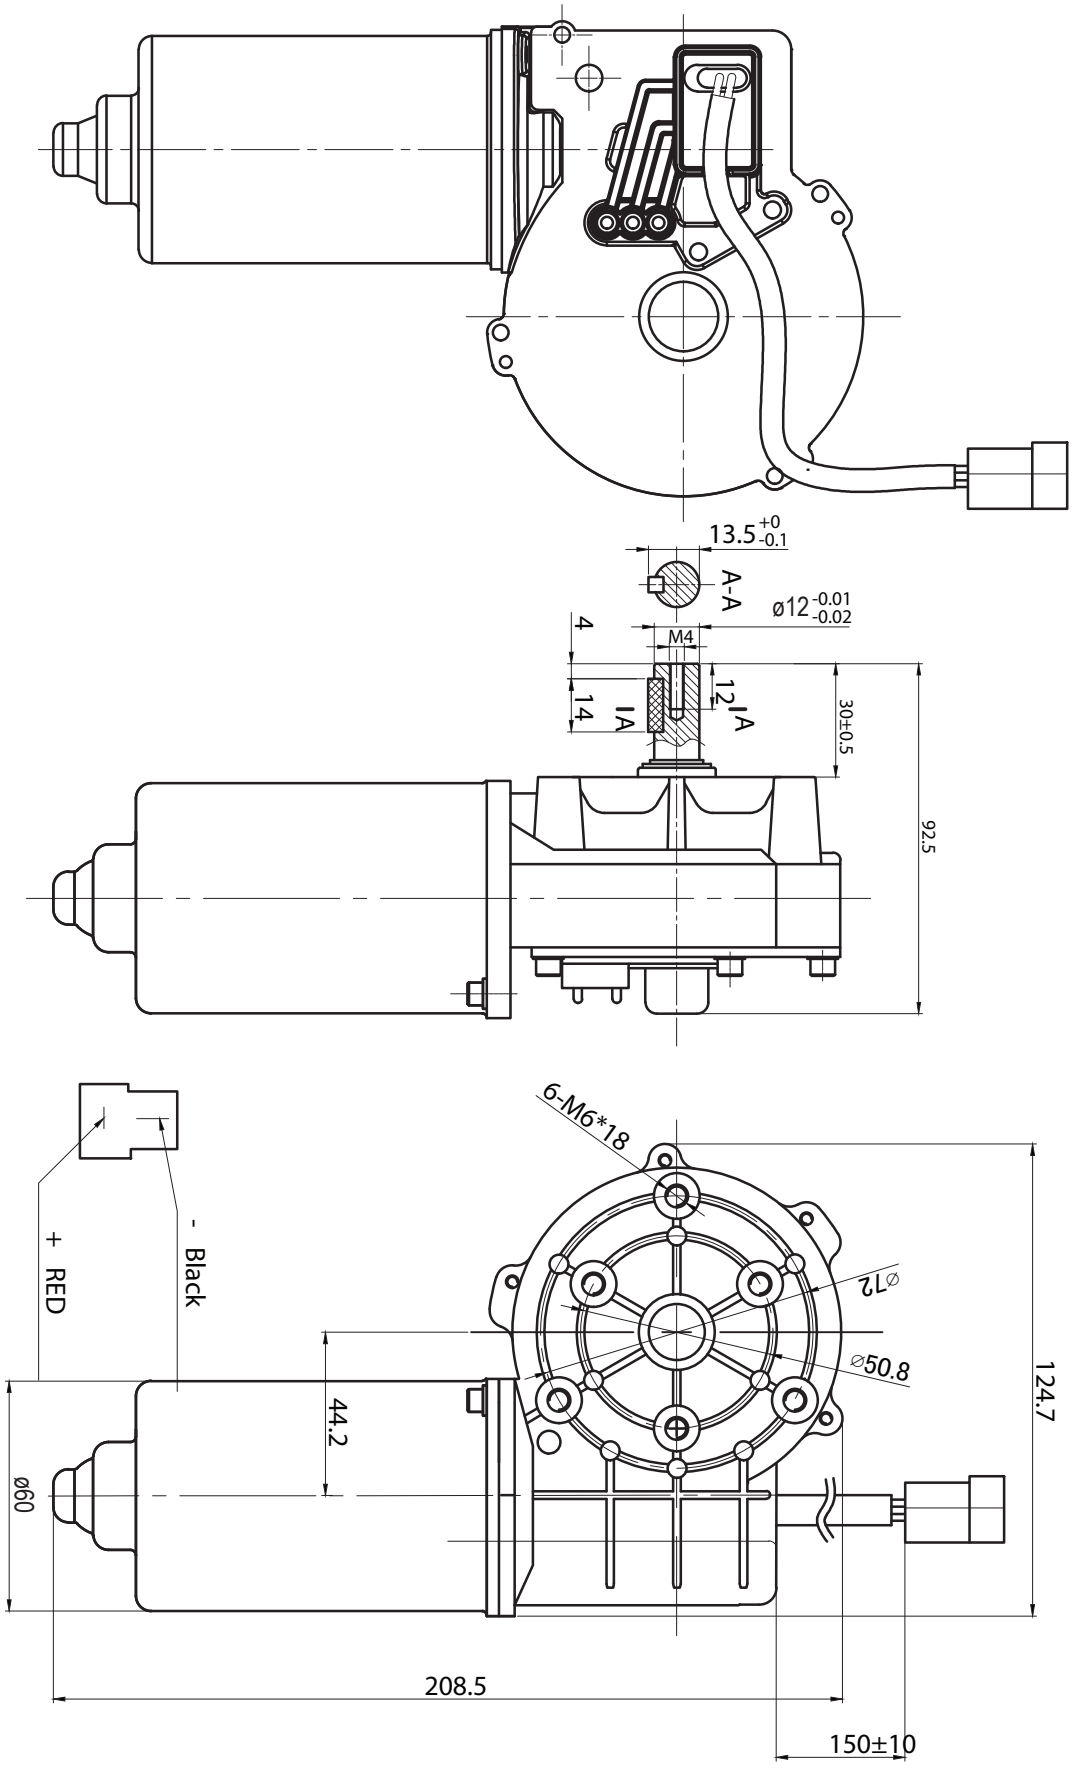


Dimensions in (mm)

Item No.: 3413230

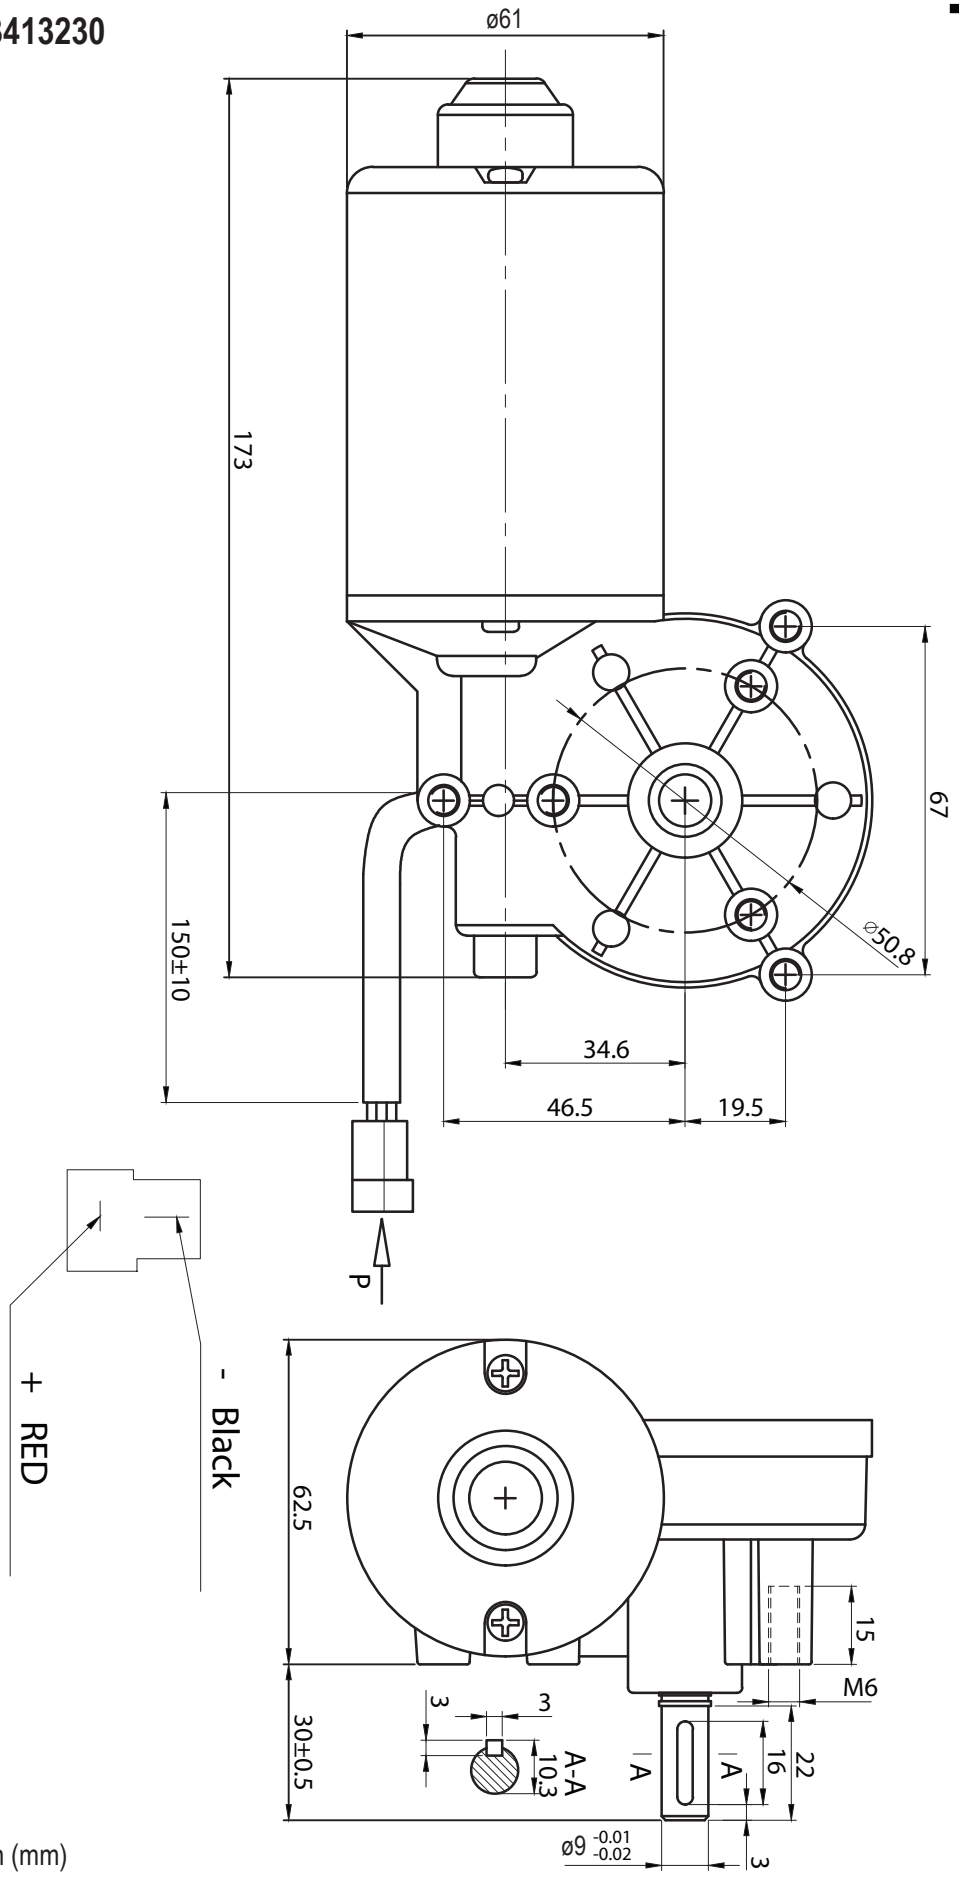


Dimensions in (mm)

Item No.: 3413231

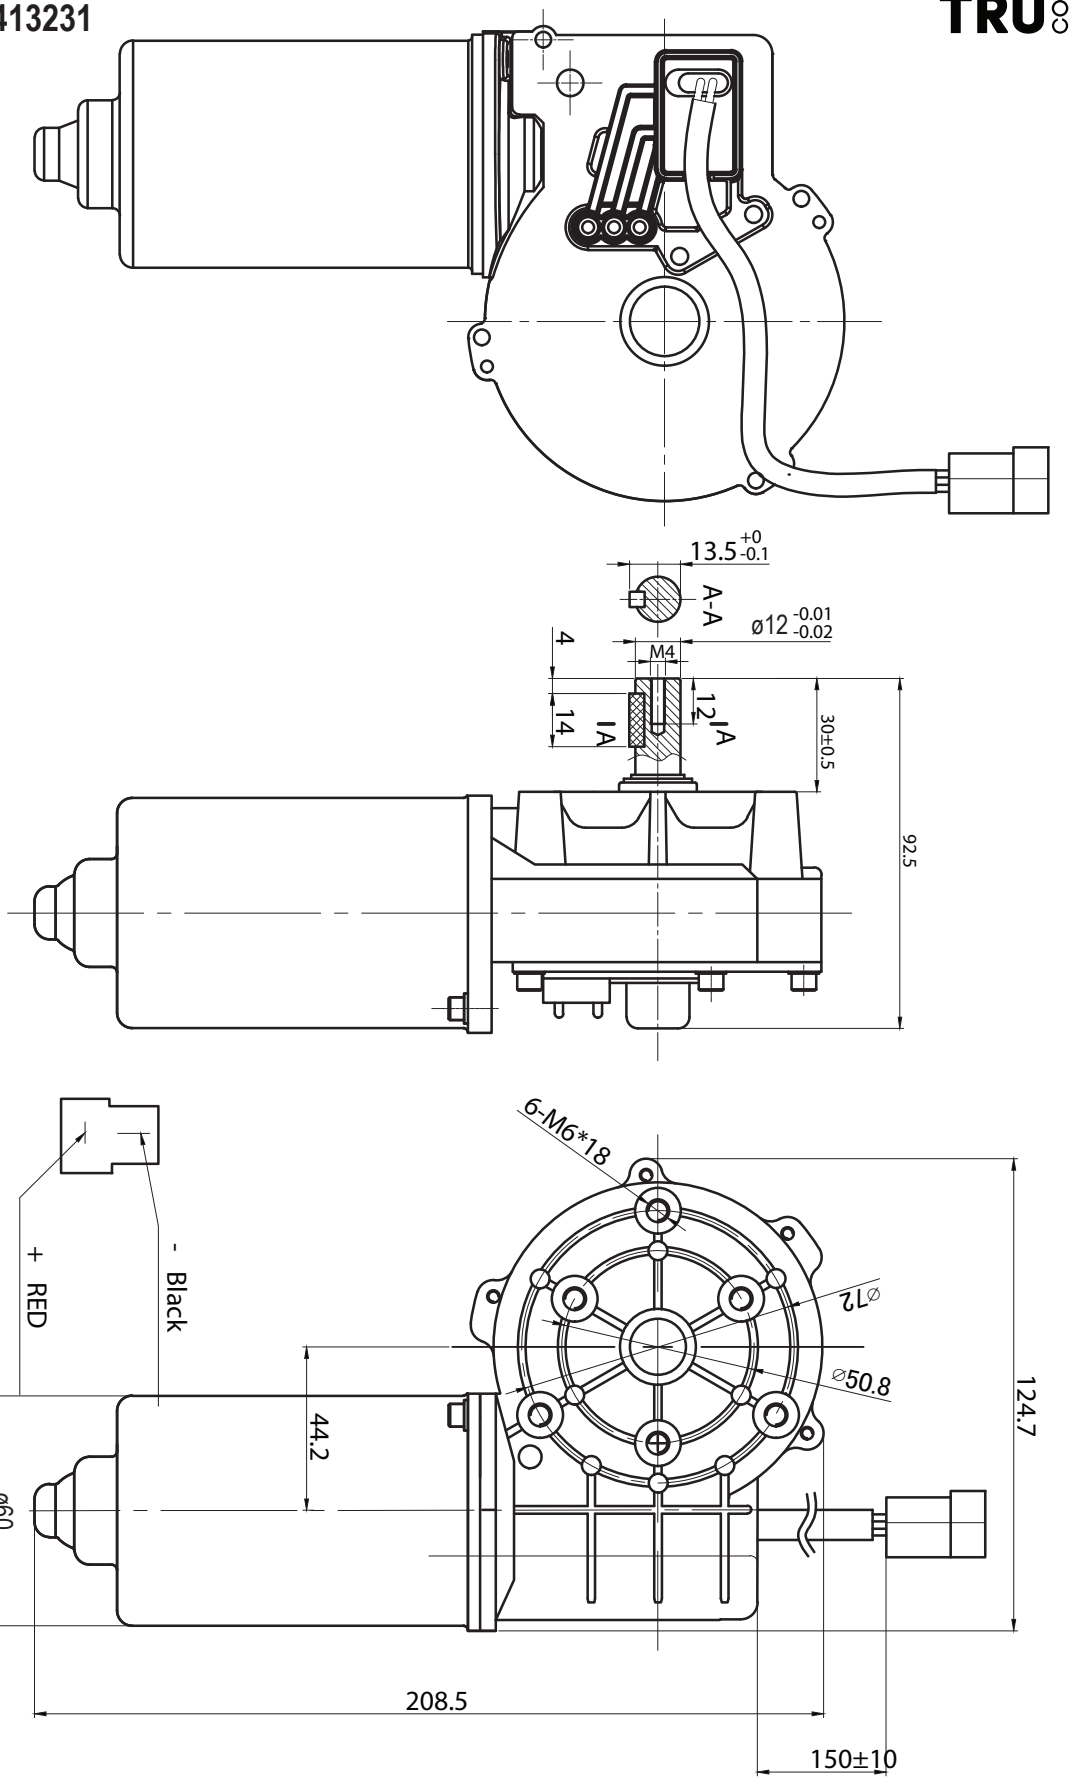


Dimensions in (mm)

Item No.: 3413232

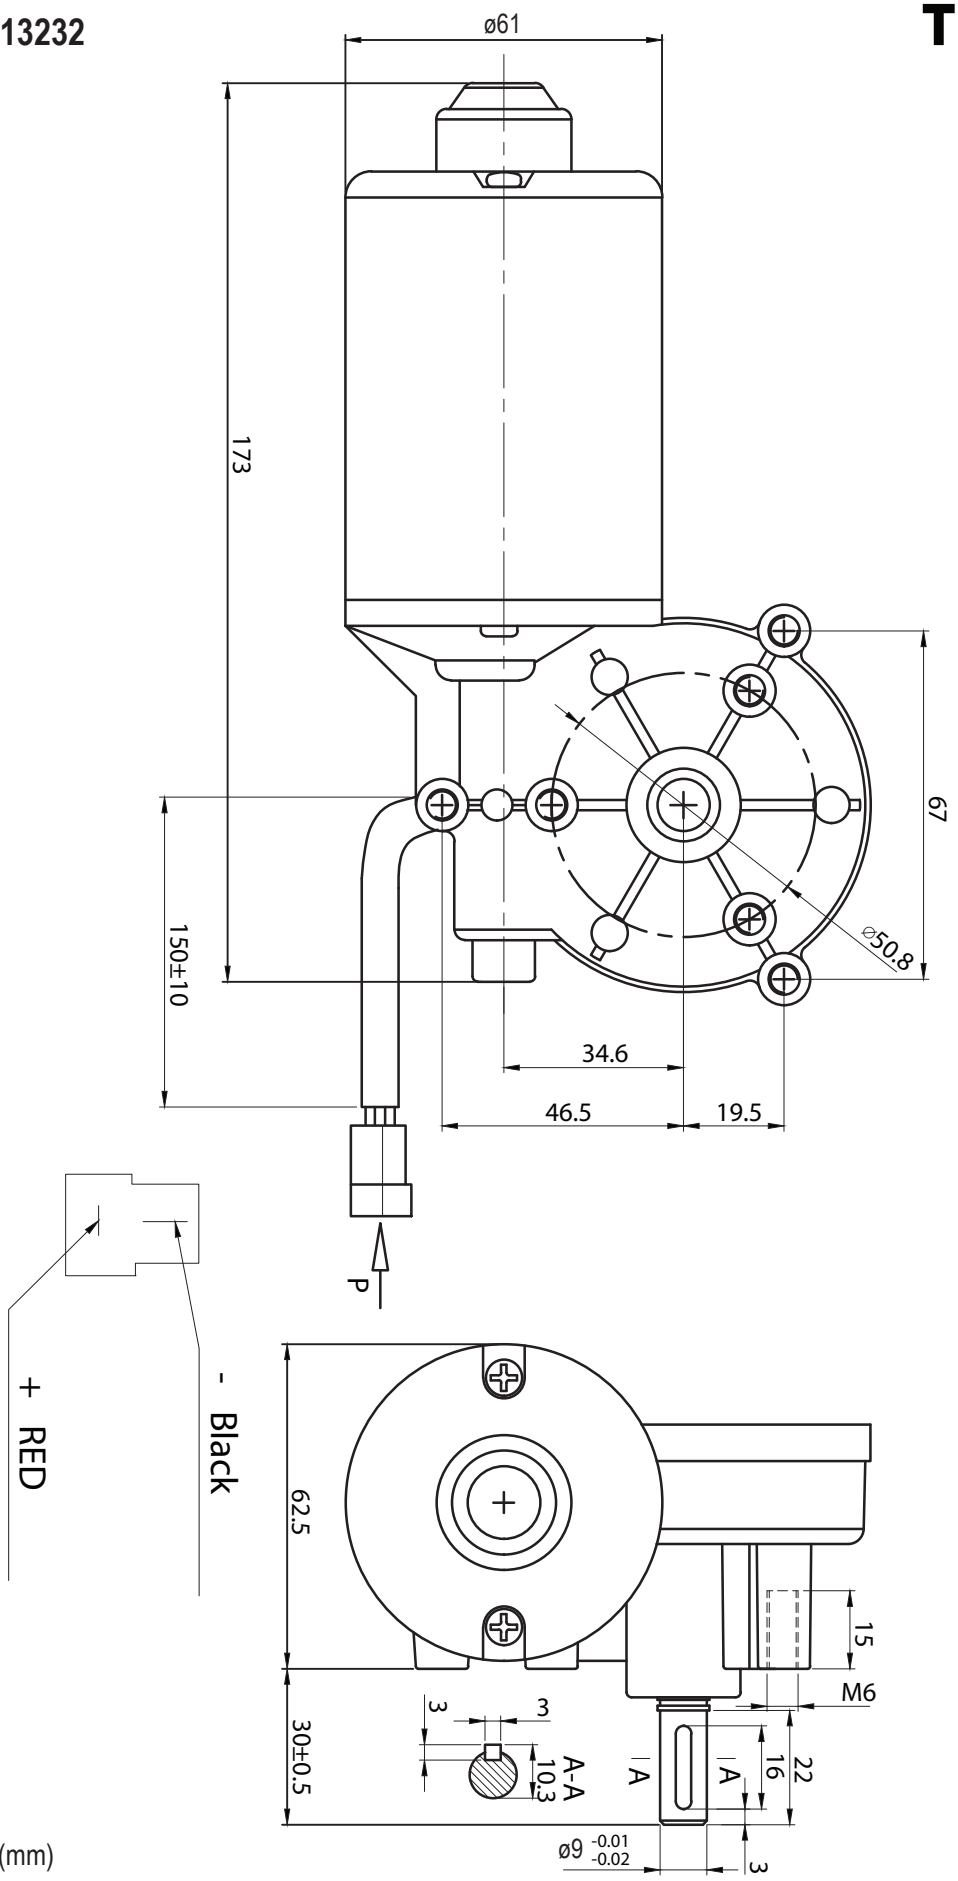

Dimensions in (mm)

Item No.: 3413237

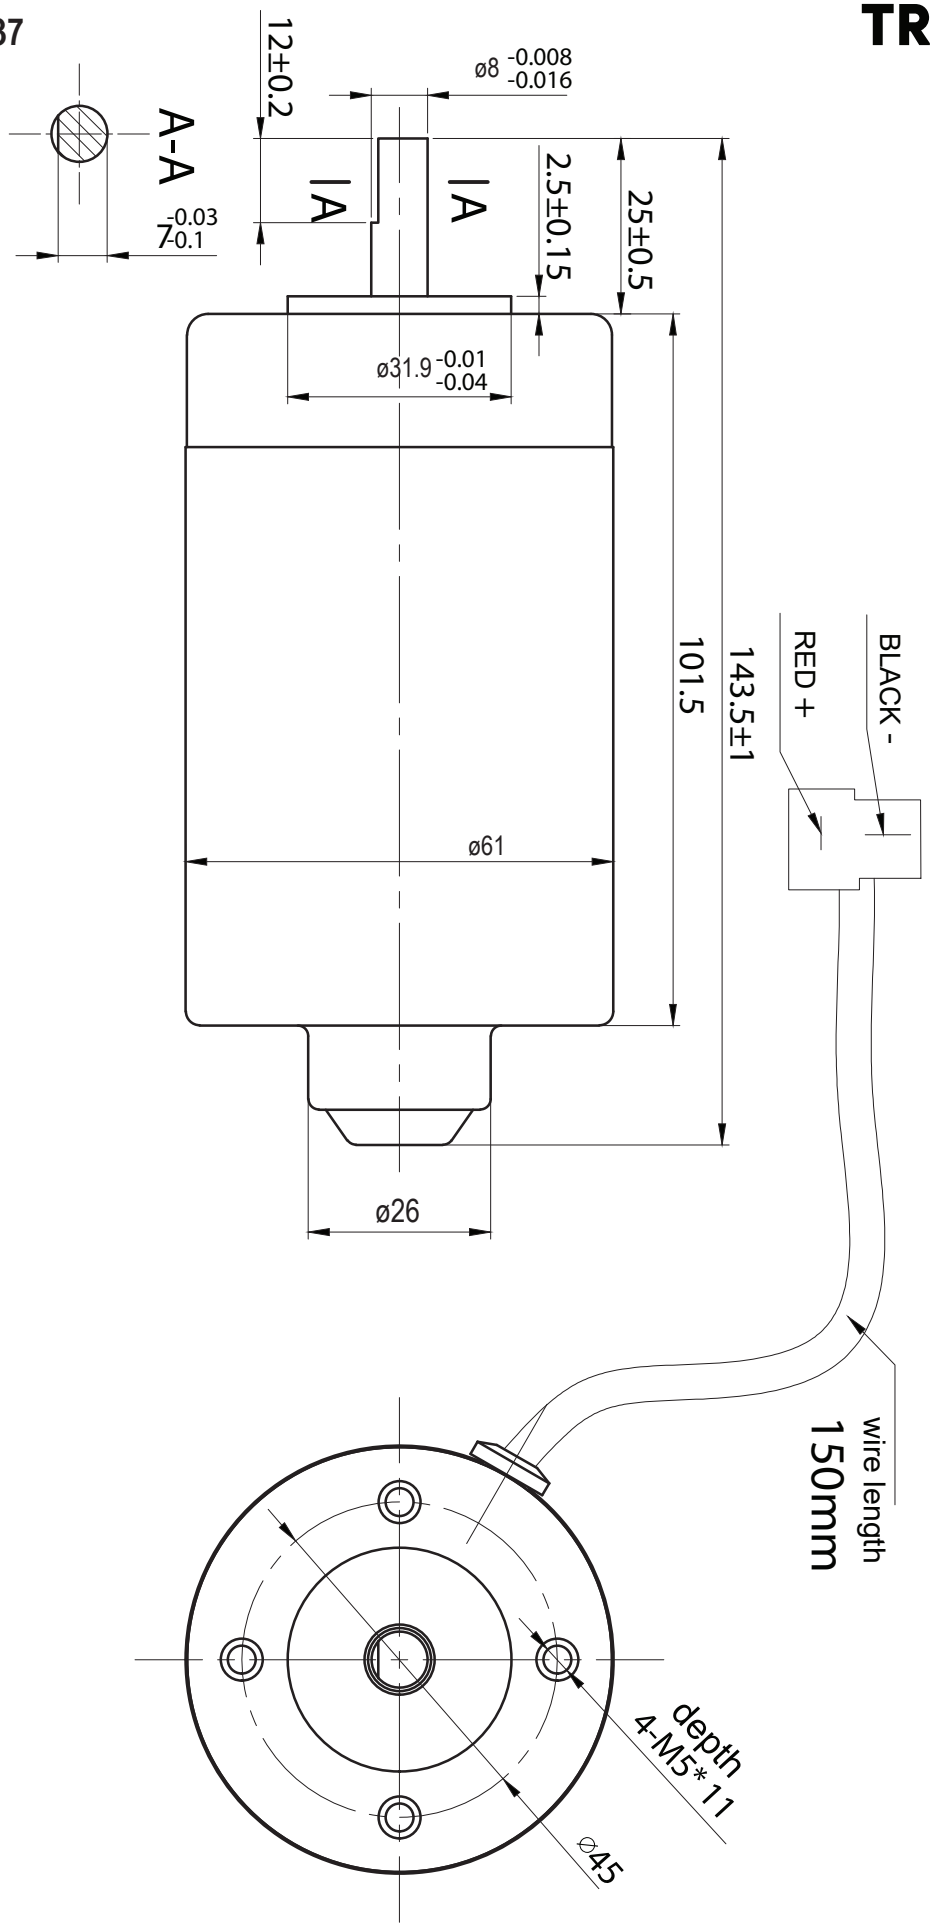

Dimensions in (mm)