

# 0916 - 0920 Push Button Switches 0.5A 250Vac

In house test

0.5A 250Vac T85

RoHS

RoHS compliant

μ contact gap.

Technical data on pages 4 & 5.

- ▶ Self wiping contacts
- ▶ Slow make & break
- ▶ Momentary action
- ▶ Choice of switch circuits
- ▶ Choice of actuators




**T 0916 S O ---**

TERMINAL   FUNCTION   ACTUATOR   BODY   COLOUR

| ▶ TERMINAL       | ▶ FUNCTION                                                                                                                                                                                                                                                                                                                                                | ▶ ACTUATOR                                                                                                                                   | ▶ BODY                                                                                                                                                                                                                                                                     | ▶ OPTIONS                                                                                                                                                            |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>T</b><br><br> | <p><b>0916</b></p> <p>Black base<br/>SP ON-OFF (momentary ON)</p> <p><b>0917</b> 50V only</p> <p>Brown base<br/>SP ON-ON (momentary 1 side)</p> <p><b>0918</b></p> <p>White base<br/>SP ON-OFF (momentary OFF)</p> <p><b>0919</b></p> <p>Black base<br/>SP ON-ON (momentary 1 side)</p> <p><b>0920</b></p> <p>White base<br/>DP ON-OFF (momentary ON)</p> | <p><b>S</b><br/>Small Actuator</p> <p><b>L</b><br/>Large Actuator</p> <p><b>V</b><br/>Vandal Resistant IP66<br/>Flat top Stainless steel</p> | <p><b>O</b><br/>for L and S Actuator</p> <p>Panel Cut-out<br/>Ø7.1</p> <p>Panel thickness<br/>Both nuts - 2.5mm<br/>No backnut - 4.0mm</p> <p><b>A</b><br/>for V Actuator (stainless steel)<br/>Chamfer profile bezel</p> <p>Panel Cut-out<br/>Panel thickness - 8.0mm</p> | <p><b>Finish</b><br/>Gloss finish for L and S actuators.</p> <p><b>Colour</b><br/>Call sales for custom colours.<br/>A full range is available for large orders.</p> |


## Dimensions (mm)

### Nylon S and L actuators

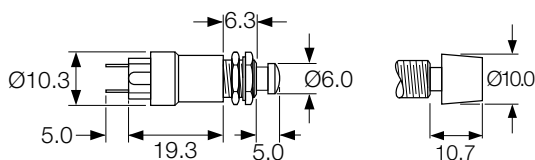

Neck thread - 40 TPI Whit. Actuator travel - 2.5 max

### Stainless steel V actuator (IP66)

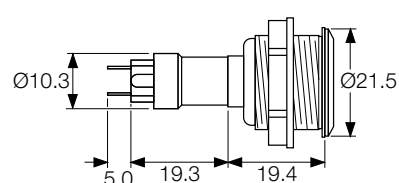

Neck thread - 26 TPI Whit. Actuator travel - 2.5 max