


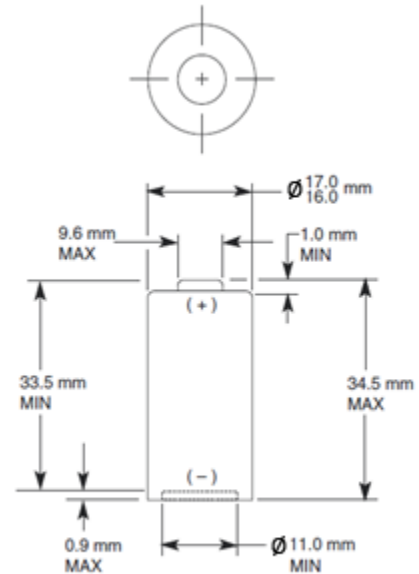

Dimensions shown are IEC/ANSI standards

Key Features

- Industry Highest Cell Capacity & High Energy
- High voltage response, stable during most of the lifetime of the application
- Reliable Performance
- Wide operating temperature range (-20°C / +75°C)
- Low self-discharge with long operating life (<1% after 1 year of storage at +20°C)
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environment standards:
 - Safety: IEC 60086-4
 - Transport: UN 38.3
 - RoHS and REACH compliance
 - Quality: ISO 9001, Duracell World Class Continuous Program

Electrical characteristics

Nominal capacity (100 Ohm Cont., 2V cut-off)	1550 mAh
Typical Voltage (at +20 °C)	3.2-3.3 V
Standard Continuous Discharge Current	20 mA
Maximum Continuous Discharge Current	60 mA
Maximum Abnormal Charge Current	25 mA
Nominal Energy	4.35 Wh
AC Impedance @ 1kHz	350 mOhm

Physical characteristics

Typical weight	17.0 g (0.60 oz.)
Li metal content	approx. 0.53g

Operating & Storage conditions

Operating temperature range	-20°C to 75°C (-4°F to 167°F)
Recommended Storage (storage area should be clean, cool, dry and ventilated)	5°C to 30°C (41°F to 86°F)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharged data shown for examples of the energy/service life that the battery will provide for various load conditions.


DURACELL®
BATTERIES

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com


Typical applications

- Cameras
- Security devices (sensors, monitoring cameras)
- Smoke Detectors
- Wireless Sensors
- Door locks
- Pet Training Collars
- High Intensity Flashlights
- Laser Sights


Pulse Discharge
0.9 Amp 3 sec / 27 sec to 1.2V

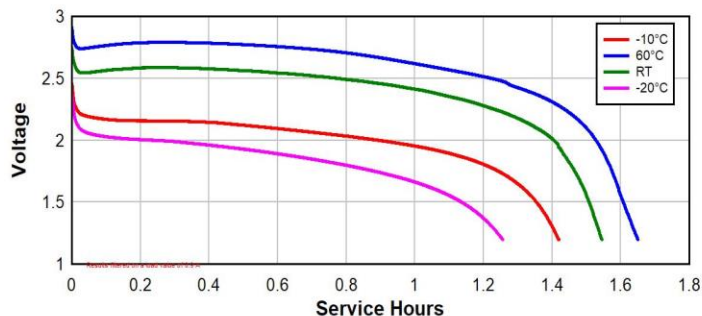

Rated Capacity
100 Ohm Continuous

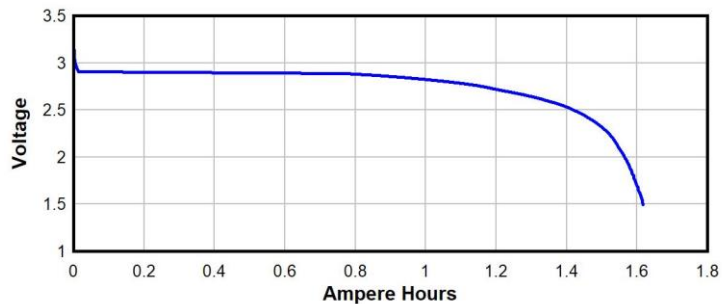


Pulse Discharge
Multiple Loads to 1.2V Cut-off

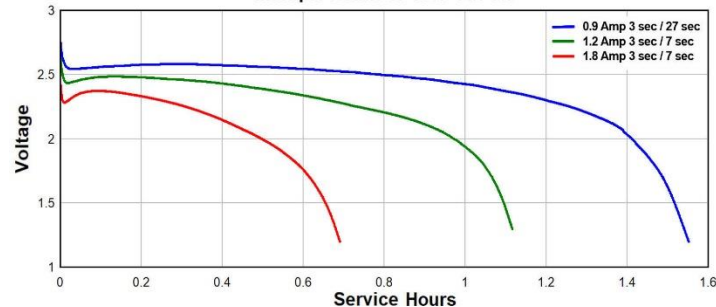

Low Load Pulse Testing
300mA Pulse with 2mA Background to 1.8V



Continuous Discharge
Various Loads

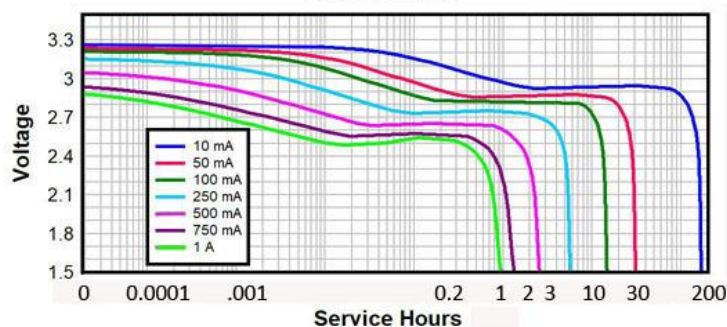

DURACELL®
BATTERIES

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

60086-4 © IEC:2007 Edition 3.0

Test	Test designation	Observation
A	Altitude	Pass
B	Thermal cycling	Pass
C	Vibration	Pass
D	Shock	Pass
E	External short circuit	Pass
F	Impact	Pass
G	Crush	Pass
H	Forced discharge	Pass
I	Abnormal charging	Pass
J	Free fall	Pass
K	Thermal Abuse	Pass

Internet Camera Testing
560mW Pulse Testing to 1.8 Cut-Off



Warning

Fire, explosion and burn hazard
Do not recharge, short circuit, crush, disassemble, heat above 100 °C (212 °F), incinerate, or expose contents to water

DURACELL®
BATTERIES

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.