




DATASHEET

ESD Brush

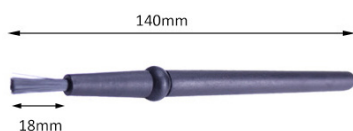

3701936




3701937



3705758

Item no	3701936	3701937	3705758
Applied standards	IEC 61340-5-1, IEC 61340-2-3	IEC 61340-5-1, IEC 61340-2-3	IEC 61340-5-1, IEC 61340-2-3
Bristle Length	18 mm	18 mm	40 mm
Brush Width	11 mm	15 mm	60 mm
Dimensions (L x W x H)	140 x 15 x 15 mm	168 x 20 x 15 mm	170 x 70 x 20 mm
Product Weight	8 g	9 g	5 g
Material	Conductive PP + Nylon	Conductive PP + Nylon	Conductive PP + Nylon
Color	Black	Black	Black
Surface resistance	$10^4 - 10^9 \Omega$	$10^4 - 10^9 \Omega$	$10^4 - 10^9 \Omega$
Operating conditions	0 to +40°C, 0 - 85% RH(non-condensing)	0 to +40°C, 0 - 85% RH(non-condensing)	0 to +40°C, 0 - 85% RH(non-condensing)

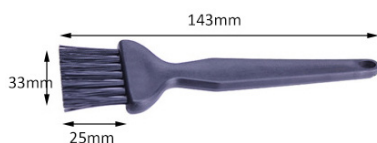

3701931




3701934



3705755

Item no	3701931	3701934	3705755
Applied standards	IEC 61340-5-1, IEC 61340-2-3	IEC 61340-5-1, IEC 61340-2-3	IEC 61340-5-1, IEC 61340-2-3
Bristle Length	25 mm	30 mm	25 mm
Brush Width	33 mm	20 mm	57 mm
Dimensions (L x W x H)	143 x 40 x 15 mm	151 x 30 x 15 mm	170 x 65 x 15 mm
Product Weight	13 g	14 g	2 g
Material	Conductive PP + Nylon	Conductive PP + Nylon	Conductive PP + Nylon
Color	Black	Black	Black
Surface resistance	$10^4 - 10^9 \Omega$	$10^4 - 10^9 \Omega$	$10^4 - 10^9 \Omega$
Operating conditions	0 to +40°C, 0 - 85% RH(non-condensing)	0 to +40°C, 0 - 85% RH(non-condensing)	0 to +40°C, 0 - 85% RH(non-condensing)



3705756



3705757

Item no	3705756	3705757
Applied standards	IEC 61340-5-1, IEC 61340-2-3	IEC 61340-5-1, IEC 61340-2-3
Bristle Length	25 mm	40 mm
Brush Width	45 mm	45 mm
Dimensions (L x W x H)	143 x 50 x 15 mm	160 x 55 x 15 mm
Product Weight	15 g	0.065 g
Material	Conductive PP + Nylon	Conductive PP + Nylon
Color	Black	Black
Surface resistance	$10^4 - 10^9 \Omega$	$10^4 - 10^9 \Omega$
Operating conditions	0 to +40°C, 0 - 85% RH(non-condensing)	0 to +40°C, 0 - 85% RH(non-condensing)




3701933



3701935

Item no	3701933	3701935
Applied standards	IEC 61340-5-1, IEC 61340-2-3	IEC 61340-5-1, IEC 61340-2-3
Bristle Length	21 mm	21 mm
Brush Width	67 mm	92 mm
Dimensions (L x W x H)	90 x 40 x 70 mm	120 x 50 x 65 mm
Weight	57 g	107 g
Material	Conductive PP + Nylon	Conductive PP + Nylon
Color	Black	Black
Surface resistance	$10^4 - 10^9 \Omega$	$10^4 - 10^9 \Omega$
Operating conditions	0 to +40°C, 0 - 85% RH(non-condensing)	0 to +40°C, 0 - 85% RH(non-condensing)



3705750




3705751



3705752


Item no	3705750	3705751	3705752
Applied standards	IEC 61340-5-1, IEC 61340-2-3	IEC 61340-5-1, IEC 61340-2-3	IEC 61340-5-1, IEC 61340-2-3
Bristle Length	15 mm	22 mm	22 mm
Brush Width	30 mm	90 mm	90 mm
Dimensions (L x W x H)	175 x 40 x 15 mm	225 x 60 x 20 mm	225 x 60 x 20 mm
Weight	18 g	52 g	58 g
Material	Conductive PP + Nylon	Conductive PP + Nylon	Conductive PP + Nylon
Color	Black	Black	Black
Surface resistance	$10^4 - 10^9 \Omega$	$10^4 - 10^9 \Omega$	$10^4 - 10^9 \Omega$
Operating conditions	0 to +40°C, 0 - 85% RH(non-condensing)	0 to +40°C, 0 - 85% RH(non-condensing)	0 to +40°C, 0 - 85% RH(non-condensing)

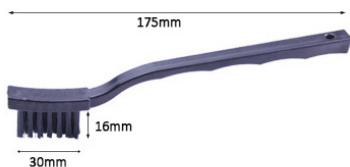

3705753



3705754

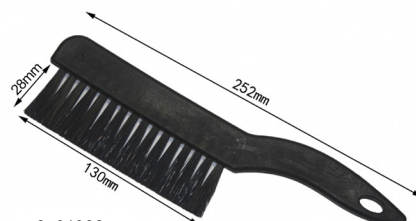

3701932

Item no	3705753	3705754	3701932
Applied standards	IEC 61340-5-1, IEC 61340-2-3	IEC 61340-5-1, IEC 61340-2-3	IEC 61340-5-1, IEC 61340-2-3
Bristle Height	16 mm	18 mm	28 mm
Brush Width	30 mm	60 mm	130 mm
Dimensions (L x W x H)	175 x 40 x 15 mm	175 x 15 x 40 mm	252 x 20 x 70 mm
Weight	13 g	24 g	1 g
Material	Conductive PP + Nylon	Conductive PP + Nylon	Conductive PP + Nylon
Color	Black	Black	Black
Surface resistance	$10^4 - 10^9 \Omega$	$10^4 - 10^9 \Omega$	$10^4 - 10^9 \Omega$
Operating conditions	0 to +40°C, 0 - 85% RH(non-condensing)	0 to +40°C, 0 - 85% RH(non-condensing)	0 to +40°C, 0 - 85% RH(non-condensing)