
DATASHEET

ESD Conductive PP Tweezers




Round tweezers

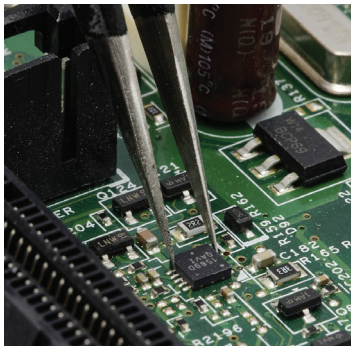

Item No.	3752517
Compliance	DIN EN 61340-5-1
Tip shape	Round
Tip	0.2 mm straight
Tip length	34 mm
Dimensions (L x W)	120 mm x 10 mm
Weight	20 g
Material	Stainless steel with ESD coating
Surface resistance	10^5 - 10^6 Ω
Operating conditions	0 to +40 °C, 0 - 85 % RH (non-condensing)
Storage conditions	-20 to +40 °C, 0 - 85 % RH (non-condensing)
Delivery content	1x tweezers

Item no 3752517

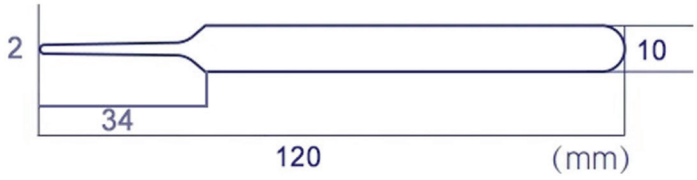


Pointed tweezers




Item No.	3752513	3752512	3752514	3752516	3752518
Compliance	DIN EN 61340-5-1				
Tip shape	Pointed	Pointed	Pointed	Pointed	Pointed
Tip	0.2 mm straight	0.2 mm straight	0.2 mm straight	0.2 mm straight	0.2 mm straight
Tip length	45 mm	53 mm	50 mm	30 mm	35 mm
Dimensions (L x W)	110 x 10 mm	140 x 10 mm	135 x 10 mm	110 x 10 mm	120 x 10 mm
Weight	20 g	20 g	20 g	20 g	20 g
Material	Stainless steel with ESD coating				
Surface resistance	10^5 - 10^6 Ω				
Operating conditions	0 to +40 °C, 0 - 85 % RH (non-condensing)				
Storage conditions	-20 to +40 °C, 0 - 85 % RH (non-condensing)				
Delivery content	1x tweezers				


Item no 3752513

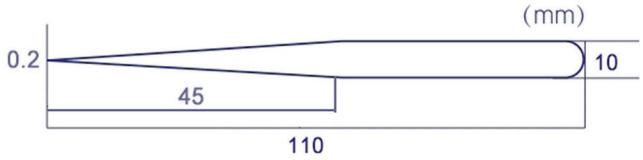


Item no 3752512

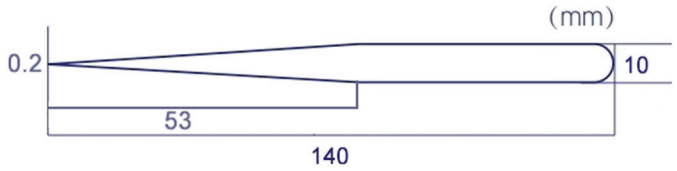


Item no 3752514

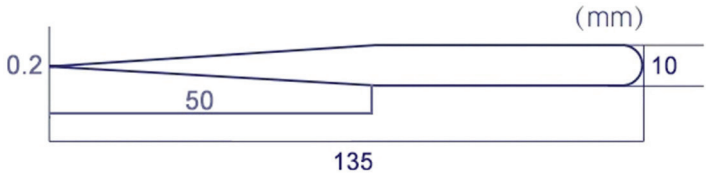

Item no 3752516

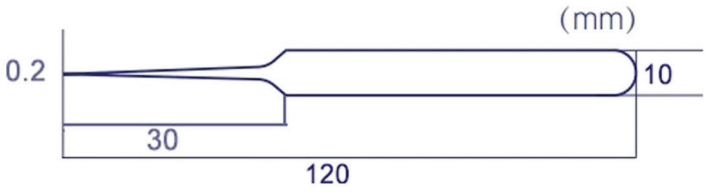

Item no 3752518

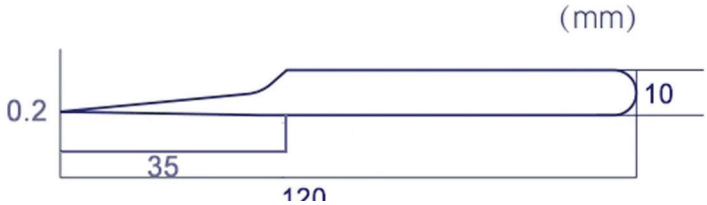


Curved tweezers



Item No.	3752519
Compliance	DIN EN 61340-5-1
Tip shape	Curved
Tip	0.2 mm straight
Tip length	12.5 mm
Dimensions (L x W)	120 mm x 10 mm
Weight	20 g
Material	Stainless steel with ESD coating
Surface resistance	10^5 - 10^6 Ω
Operating conditions	0 to +40 °C, 0 - 85 % RH (non-condensing)
Storage conditions	-20 to +40 °C, 0 - 85 % RH (non-condensing)
Delivery content	1x tweezers

Item no 3752519

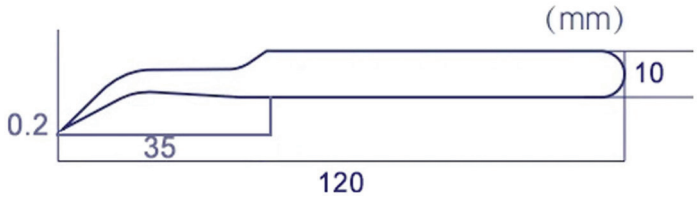

This is a publication by Conrad Electronic SE, Klaus-Conrad-Str. 1, D-92242 Hirschau (www.conrad.com). All rights including translation reserved. Reproduction by any method, e.g. photocopy, microfilming, or the capture in electronic data processing systems require the prior written approval by the editor. Reprinting, also in part, is prohibited. This publication represents the technical status at the time of printing.

Copyright 2026 by Conrad Electronic SE.