


| Art.-<br>No. | Bemessungswerte/Ratings/Valeurs assignées |                                |  | Spannungsfall<br>Voltage drop<br>Chute de tension<br>max [mV] | Verlustleistung<br>Sustained dissip.<br>Valeur de dissip.<br>max [W] | Schmelzintegral<br>Melting integral<br>Intégral de fusion<br>[A <sup>2</sup> s] |
|--------------|---|--------------------------------|--|---|--|---|
|              | Strom<br>Current<br>Courant               | Spannung<br>Voltage<br>Tension | Ausschaltvermögen<br>Breaking capacity<br>Pouvoir de coupure |   |  |   |
| 522.502      | 32 mA                                     | 250 V                          | 35 A   | 5.000   | 1,6  | 0,004362  |
| 522.503      | 40 mA                                     |                                |  | 0,008320  |  |   |
| 522.504      | 50 mA                                     |                                |  | 0,011150  |  |   |
| 522.505      | 63 mA                                     |                                |  | 0,022703  |  |   |
| 522.506      | 80 mA                                     |                                |  | 0,033024  |  |   |
| 522.507      | 100 mA                                    |                                |  | 0,054400  |  |   |
| 522.508      | 125 mA                                    |                                |  | 0,046875  |  |   |
| 522.509      | 160 mA                                    |                                |  | 0,097765  |  |   |
| 522.510      | 200 mA                                    |                                |  | 0,11  |  |   |
| 522.511      | 250 mA                                    |                                |  | 0,37  |  |   |
| 522.512      | 315 mA                                    |                                |  | 0,33  |  |   |
| 522.513      | 400 mA                                    |                                |  | 0,54  |  |   |
| 522.514      | 500 mA                                    |                                |  | 0,96  |  |   |
| 522.515      | 630 mA                                    |                                |  | 1,60  |  |   |
| 522.516      | 800 mA                                    |                                |  | 3,02  |  |   |
| 522.517      | 1 A                                       |                                |  | 6,26  |  |   |
| 522.518      | 1,25 A                                    |                                |  | 12,06   |  |   |
| 522.519      | 1,6 A                                     |                                |  | 22,02   |  |   |
| 522.520      | 2 A                                       |                                |  | 33,52   |  |   |
| 522.521      | 2,5 A                                     |                                |  | 63,75   |  |   |
| 522.522      | 3,15 A                                    | 93,87                          |  |   |  |   |
| 522.523      | 4 A                                       | 40 A                           | 100  | 170,24  |  |   |
| 522.524      | 5 A                                       | 50 A                           | 100  | 92,00   |  |   |
| 522.525      | 6,3 A                                     | 63 A                           | 100  | 146,06  |  |   |
| 522.526      | 8 A                                       | 125 V                          | 80 A   | 100   | 4  | 235,52  |
| 522.527      | 10 A                                      | 100 A                          | 100  | 462,00  |  |   |

Aufbau: Glasrohr, durchsichtig  
Kontaktkappen: Messing, vernickelt  
Verpackung: 100 St. = 10 x 10 Faltschachteln  
1000 St. = Industrieverpackung

Construction: Glasstube, transparent  
Contact caps: Brass, nickel plated  
Packing: 100 pcs. = 10 boxes of 10 pieces  
1000 pcs. = Industrial boxes

Construction: Tube verre, transparent  
Cabochons de contact: Laiton, nickelé  
Emballage: 100 pcs. = en 10 boîtes de 10 pièces  
1000 pcs. = en emballage industriel

Strom-Zeit-Kennlinien  
Current Time Characteristics  
Caractéristique courant/temps

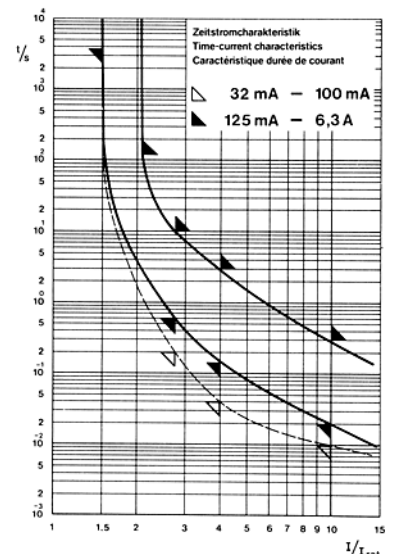

Schmelzzeit-Grenzwerte / Pre-arcing time limits / Temps de fusion limité

| Bemessungsstrom<br>Rated current<br>Courant assigné | 2,1 I <sub>rat</sub> |  | 2,75 I <sub>rat</sub> |      | 4 I <sub>rat</sub> |      | 10 I <sub>rat</sub> |        |
|---|----------------------|--|-----------------------|------|--------------------|------|---------------------|--------|
|   | max.                 |  | min.                  | max. | min.               | max. | min.                | max.   |
| 32 - 100 mA   | 2 min                |  | 200 ms                | 10 s | 40 ms              | 3 s  | 10 ms               | 300 ms |
| 125 mA - 10 A                                       | 2 min                |  | 600 ms                | 10 s | 150 ms             | 3 s  | 20 ms               | 300 ms |

1) auf Anfrage / on request / à demande

2) 63 mA - 6,3 A