


PMC-0701TH

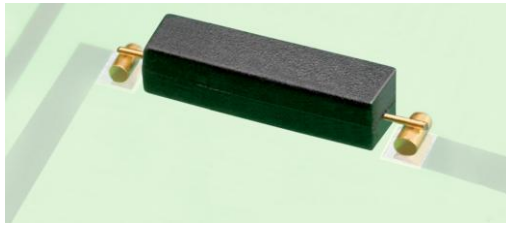

PMC-0701TH

Standard SMD Reed Switch
pitch 11.3 mm

Electrical Characteristics

@ 25 °C

Contact form		A
Contact material		Ru
Contact rating max.	W / VA	10
Switching voltage max.	VDC	150
	VAC	120
Switching current max.	A	0.5
Carry current max.	A	0.7
Breakdown voltage min.	VDC	200
Contact resistance max. (initial)	mΩ	250
Insulation resistance min.	Ω	10 ⁹

Magnetical Characteristics (of unmodified Reed Switch)

@ 25 °C

Pull in range available	AT	10 - 20
Drop out min.	AT	4
Test coil	TC	010
Test equipment tolerance	±AT	2

Operating Characteristics

@ 25 °C

Switching frequency max.	Hz	600
Resonant frequency typ.	Hz	12000
Operate time max. (incl. bounce)	ms	0.3
Release time max.	ms	0.1

Environmental Characteristics

Operating temperature	°C	-40 to +125
Storage temperature	°C	-40 to +125
Soldering temperature max.	°C	255
Vibration (50-2000 Hz)	g	10
Shock (1/2 sin 11 ms)	g	50
Lead tensile strength min.	kg	2


Features

- Small size
- Electrical ratings valid above 10 AT
- Minimum height above PCB
- Suitable for automated assembly
- Various sensitivity ranges available
- Suitable for lead-free soldering

Approvals



Dimensions in mm

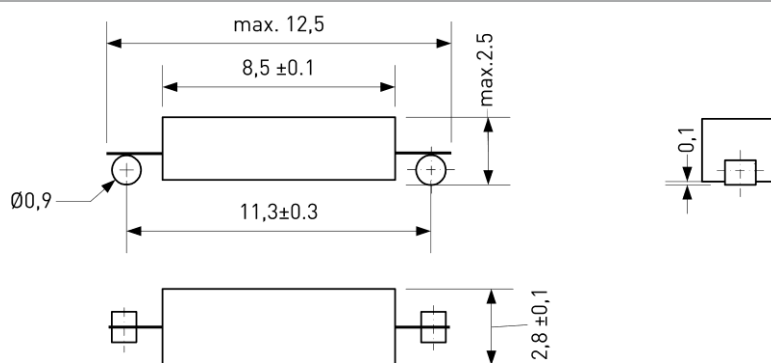

Ordering Information


Packing Unit	2500 pcs
Weight per piece	0.1 g
Weight per package	850 g
Reel size	13 inches
Standard AT ranges	

10 to 15 AT
15 to 20 AT

Ordering example

PMC-0701TH1520 describes PMC-0701TH with 15 to 20 AT


PMC-0701TH

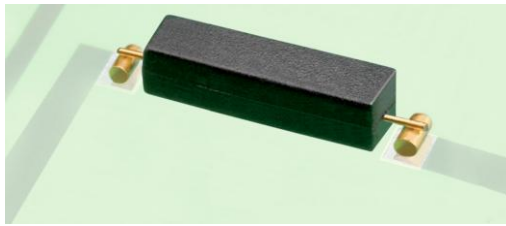

PMC-0701TH

Standard SMD Reed Switch
pitch 11.3 mm

Recommended PCB Layout in mm

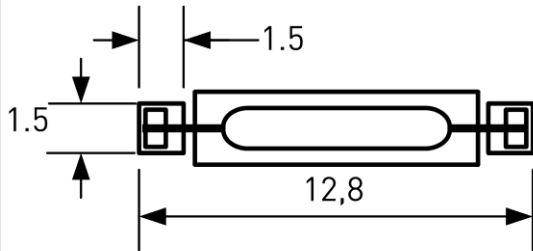


Pad sizes




Final assembly position

Soldering Information

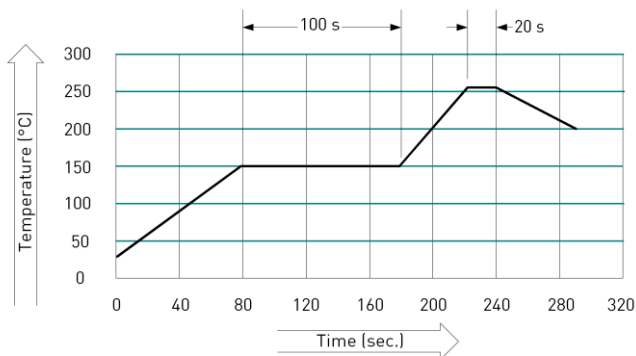


Mounting Force

Recommended Mounting Force	3 N
Maximum Mounting Force	10 N



Tape Dimensions in mm

Tolerance ± 0.1 unless otherwise specified

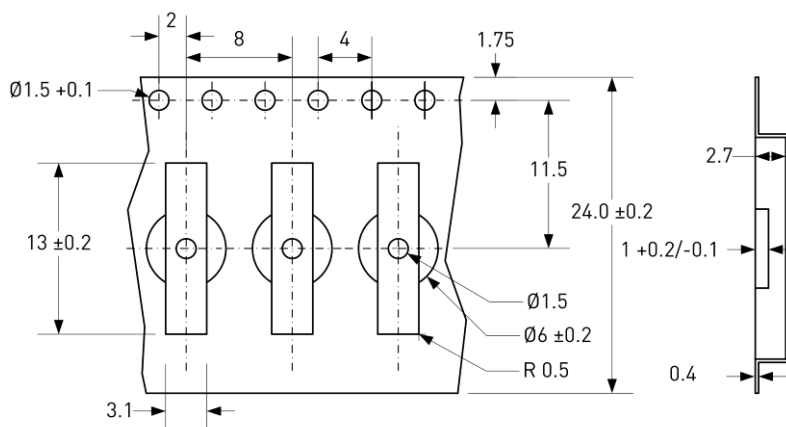

Remarks

When placed onto ferromagnetic parts switching distance of PMC-0701TH may reduce.

Electromagnetical influences and magnetic fields may change the switching behaviour of the SMD Reed Switch.

When placed onto ferromagnetic parts switching distance of PMC-0701TH may reduce.

Electromagnetical influences and magnetic fields may change the switching behavior of the SMD Reed Switch.

Please pay attention to MSL instruction as per label on reel.