

ICP281029HPG

Rechargeable Lithium Ion Polymer Cell 3.8 V

Specifications

Renata Type	ICP281029
IEC Designation	ICP041131
Part Number	101024
Contact Method:	Wire AWG 30
Safety Circuit	No
Nominal Voltage	3.8 V
Typical Capacity	68 mAh
Minimum Capacity	65 mAh (0.2C cut off 3.0 V at 20°C)

Internal Impedance < 570 mΩ / 30% SOC

Thickness (t)	Max 3.3 mm (after 500 cycles)
Length (l)	Max 30.5 mm (after 500 cycles)
Width (w)	Max 10.2 mm (after 500 cycles)
Weight	~ 2.4 g

Charging Characteristic

CC/CV – Constant Current / Constant Voltage	
Voltage	4.35 V CV
Current Normal	0.5 C CC – 34 mA
Max. Charging Current	1.0 C CC – 68 mA
Temperature at Charging	0 °C 45 °C

Discharge Characteristic

Cut off Voltage	3.0 V
Max discharge Current	2.0 C – 136 mA (for non continues discharge) 1.0 C – 68 mA (for continues discharge)
Temperature during Discharge	-20 °C ... 60 °C

Cycle Life at Room Temperature > 80% of minimum capacity after 500 cycles (0.5 C charge, 0.5 C discharge)

Storage Temperature -20 °C ... 45 °C
(0 °C ... 30 °C recommended in case of storage for more than 3 months)

Dimensions

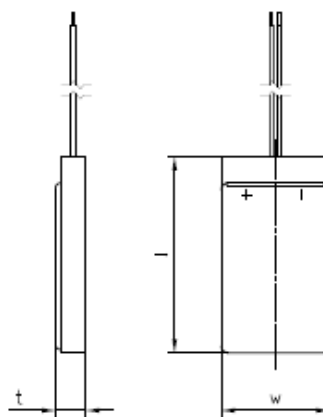


Illustration only. For detailed drawing please contact your sales representative.

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the ASDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use