材质：100G 铜版纸

中间折叠，双面打印，彩色打印

100mm 100mm

175 mm

suinado

快速入门指引





逆时针拧开防水盖到如图位置
油门线接口安装于对应位置



顺时针拧紧防水盖



桨板支架

注意：需要在无水环境下安装，避免接口处有水，如果有水需要晾干。

桨板支架使用步骤：

1.请先确认桨板支架粘合处是否干净、平整，如果有脏污、沙尘，请先清洁干净并保持干燥；
2.将桨板支架上的贴纸撕下粘合于板体如：冲浪板)底部，再按压桨板支架以固定；
3.为保证桨板支架上的纳米胶效果达到最佳，请粘合于板体后静置半小时；
4.通过快拆件与主机连接，每次下水使用 subnado 前请召机身方向用七公斤左右力，检查支架是否稳固，以确保粘贴有效。

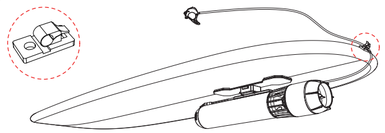

固定扣使用步骤：

1.请先确认固定扣粘合处是否干净、平整，如果有脏污、沙尘，请先清洁干净并保持干燥；
2.将固定扣上的贴纸撕下粘合于板体上(如：冲浪板)或板体的侧面，再按压固定扣以固定；
3.为保证固定扣上的纳米胶效果达到最佳，请粘合于板体后静置半小时后，在下水使用前，请轻微晃动固定扣，确保粘贴有效。

友情提示

充电完成后机器会发出提示音，请及时拔出充电线，以保存电量。

充电时间参考

充电器10W	预计10小时	充电器18W-24W	预计7小时
充电器36W	预计3.5小时	充电器45W	预计3小时
充电器60W-66W	预计2小时	充电器100W	预计1.2小时

如何使用 Subnado

1. 打开主机电源，确认电量。（详见说明书P12 ）
2. 快按油门扳机 2 次，进行高低档位切换；快按油门扳机 3 次，可启动Super模式。
提示音的数量表示切换进入的档位，进入低档时发出一声提示音，进入高速档时发出两声提示音，进入Super档时发出三声提示音。(电量≤37.5%将无法进入Super档)
注意：Super档位在启动后可工作 1 分钟，若要重新进入Super档位，需再次快按扳机 3次。
注意：使用后关闭主机电源以保存电量。

定速巡航模式：在定速巡航模式下，按下油门扳机15 秒后，当有瞬时变速时机器进入巡航工作状态。此时用户可以松开油门扳机，螺旋桨将继续旋转。再次按下油门扳机并松开，螺旋桨将停止旋转并退出此状态。

如何开启/关闭定速巡航模式：请按住油门扳机后打开主机电源。

注意：如果已在定速巡航模式，此操作就是关闭定速巡航

如何为 Subnado 充电



1. 选择支持 PD 协议的充电头，以加快充电速度。
2. 机头朝下（防止防水盖内有水落入）打开防水盖，检查USB-C周边及内部是否有水（如果有水需先晾干；如果有海水必须先使用淡水或酒精彻底清洗干净并晾干），无异常后插入 USB-C 充电线开始充电。

200mm

100mm 100mm

175 mm

suinado

Quick Start Guide

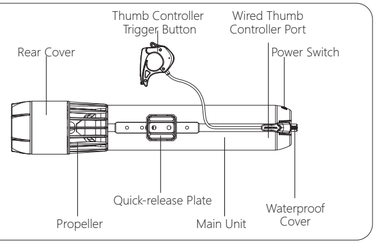



Turn the waterproof cover counterclockwise to the illustrated position. Install the wired thumb controller to the corresponding port.



Tighten the waterproof cover clockwise.

Board Mount

Note: Please install the wired thumb controller in a dry environment. Please dry the port before installation if it is wet.



Board Mount Installation:

1.Please confirm that the board surface is clean and even before installation. Please wipe off any dirt or dust, and keep the surface dry.
2.Peel off the protective liner on the board mount's adhesive pads, attach the mount to the board and firmly press the pads to ensure a tight bond.
3.Let the adhesive cure for half an hour after installation to get a strong bond.
4.Install the Subnado to the board mount through the quick-release clamp. Apply a force of about 70N along the Subnado to check whether the board mount is secure before each use.

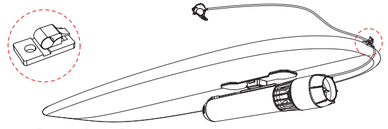

Controller Wire Clip Installation

1.Please confirm that the surface is clean and even before installation. Please wipe off any dirt or dust, and keep the surface dry.
2.Peel off the protective liner on the controller wire clip's adhesive pad, attach the clip to the board and firmly press it to ensure a tight bond.
3.Let the adhesive cure for half an hour to get a stronger bond. Please gently rock the clip to check the adhesion security before entering the water.

Tips: The Subnado will beep when charging is complete. Please unplug the charging cable to preserve battery life.

Reference Charging Time:

10W Charger – approx. 10 hours	18-24W Charger – approx. 7 hours
36W Charger – approx. 3.5 hours	45W Charger – approx. 3 hours
60-66W Charger – approx. 2 hours	100W Charger – approx. 1.2 hours

How To Operate the Subnado

1. Power on the Subnado, confirm the power level.
(Please refer to Page 12 of the User Manual for details)
2. Quickly press the trigger twice to switch to high or low gear. Quickly press the trigger three times to switch on/off the super gear.The number of beeps indicates the gear that's entered. "One beep" prompts to enter low gear, "two beeps" prompts to enter high gear, and "three beeps" prompts to enter super gear. (When power level is below 37.5% , it can not enter super gear)

Note: The super gear only maintains for 1 minute. To re-enter super gear, please quickly press the trigger 3 times.

Note: Please switch off the Subnado after use to preserve the battery life.

Cruise Mode: Under cruise mode, the propeller rotates after holding the trigger for 15 seconds. A transient speed change indicates the Subnado has entered auto cruise. The propeller continues rotating even when the user releases the trigger. Press the trigger again to exit auto cruise and stop the rotating propeller.

How to turn on/off the constant speed cruise mode: Press and hold the controller trigger, meanwhile turn on Subnado.

Note: If it is already in the constant speed cruise mode, this operation will switch off the constant speed cruise mode.

How to Recharge the Subnado



1. Please select a charger that supports PD protocol to speed up charging.
2. Open the waterproof cover (facing down to prevent water from entering). Check for moisture around and inside the USB-C port. If there is water, it needs to be dried first. If there's saltwater, it must be thoroughly cleaned with fresh water or isopropyl alcohol. After confirming that there is no abnormality, insert the USB-C charging cable to start charging.

200mm