



Modicon Networking

Connecting Ethernet Devices



Modicon

Discover **Modicon**

Edge control for industrial internet of things (IoT)

Modicon IIoT-native edge controllers manage complex interfaces across assets and devices or directly into the cloud, with embedded functional safety and cybersecurity. **Modicon** provides performance and scalability for a wide range of industrial applications up to high-performance multi-axis machines and high-available redundant processes.

Explore our offer

- **Modicon** HVAC Controllers
- **Modicon** PLC
- **Modicon** Motion Controllers
- **Modicon** PAC
- **Modicon** Edge I/O
- **Modicon** I/O
- **Modicon** Networking
- **Modicon** Power Supply
- **Modicon** Wiring
- **Modicon** Safety

Life Is On

Schneider
Electric

Quick access to product information

Get technical information about your product

References

Modicon TM3
I/O expansion modules for Modicon controllers
Analog I/O modules

References	Input range	Output range	Resolution	Input terminal block (T)	Reference	Weight
2 voltage/current inputs	-15...+15 VDC 0...+10 VDC 0...20 mA A...20 mA	15 000 mV 15 000 mV 15 000 mV	12 bits 12 bits 12 bits	0 580 02 0 580 02 0 580 02	TM3AI2H TM3AI2H TM3AI2H	0.150 0.150 0.150
4 voltage/current inputs	-15...+15 VDC 0...+10 VDC 0...20 mA A...20 mA	15 000 mV 15 000 mV 15 000 mV	12 bits 12 bits 12 bits	0 580 02 0 580 02 0 580 02	TM3AI4H TM3AI4H TM3AI4H	0.200 0.200 0.200
4 voltage/current or temperature inputs (2)	Thermocouples (2) J, K, R, S, E, T, N, B, C Temperature inputs (2) PT100, PT500, PT1000 0...+10 VDC 0...20 mA A...20 mA	15 000 mV 15 000 mV 15 000 mV	12 bits 12 bits 12 bits	0 580 02 0 580 02 0 580 02	TM3AI4H TM3AI4H TM3AI4H	0.200 0.200 0.200
4 differential temperature inputs	Thermocouples (4) J, K, R, S, E, T, N, B, C 0...+10 VDC 0...20 mA A...20 mA	15 000 mV 15 000 mV 15 000 mV	12 bits 12 bits 12 bits	0 580 02 0 580 02 0 580 02	TM3AI4H TM3AI4H TM3AI4H	0.200 0.200 0.200
4 voltage/current inputs	-15...+15 VDC 0...+10 VDC 0...20 mA A...20 mA	15 000 mV 15 000 mV 15 000 mV	12 bits 12 bits 12 bits	0 580 02 0 580 02 0 580 02	TM3AI4H TM3AI4H TM3AI4H	0.200 0.200 0.200

Each commercial reference presented in a catalog contains a hyperlink. Click on it to obtain the technical information of the product:

- Characteristics, Dimensions and drawings, Mounting and clearance, Connections and schemas, Performance curves
- Product image, Instruction sheet, User guide, Product certifications, End of life manual

Share Price Global (English)

Life Is On Schneider Electric

Search products, documents & more

PRODUCTS SOLUTIONS SERVICES SUPPORT ABOUT US

All products Industrial Automation and Control PLC, PAC and Distributed Controllers Distributed Input/Output (I/O) Modules Modicon TM3

TM3AI2H

Module TM3-2 analog inputs high resolution

Show more characteristics >

Related Software >

Product Datasheet User guide Catalogue CAD Document

Characteristics Documents and Downloads Technical FAQs Additional Information Dimensions Drawings >


Main

range of product Modicon TM3

product or component type Analog input module

range compatibility Modicon M51
Modicon M21
Modicon M241

Find your catalog

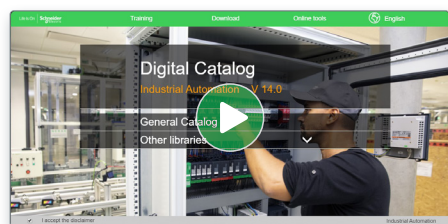

- > With just 3 clicks, you can access the Industrial Automation and Control catalogs, in both English and French
- > Consult digital automation catalogs at [Digi-Cat Online](#)

General Catalog

Publications, Datasheets, Product Lights & more

Books, Catalogs & Interfaces

Displaying Datasheets

PLC (Controllers and Industrial PLC)

Sensors & RTD Systems

Motor Drives and Load Management

Companions for Motor Drives

Variable Speed Drives & Soft Starters

Electric Control & Protection

Interface, Measurement & Control Policies

PLC, PAC & other Controllers

Product Selector

Product Details

360°

- Up-to-date catalogs
- Embedded product selectors, 360° pictures
- Optimized search by commercial references

Select your training



- > Find the right [Training](#) for your needs on our Global website
- > Locate the training center with the selector tool, using this [link](#)

Life Is On Schneider Electric

Search products, documents & more

PRODUCTS SOLUTIONS SERVICES SUPPORT ABOUT US

Training and courses

Training by domain of expertise

Electrical Installation and Safety

Data Center

Industrial Automation

Life Is On

Schneider Electric

General contents


Modicon Networking - Connecting Ethernet devices

- **Presentation**
 - Industrial Ethernet architecture..... [page 2](#)
 - Industrial Ethernet networking products [page 3](#)
- [Selection guide..... \[page 4\]\(#\)](#)
- **Choice of guide**..... [page 24](#)
- **References**
 - Unmanaged switches [page 25](#)
 - Managed switches..... [page 26](#)
 - Industrial Ethernet firewalls..... [page 30](#)
 - Connection components..... [page 31](#)
- **Certifications and regulation** [page 33](#)
- **Product reference index**..... [page 34](#)

Industrial Ethernet Architecture

Ethernet Architecture

Modicon Networking is a complete offer portfolio of Ethernet connectivity products. It connects all the EcoStruxure stacks together in an efficient and secure manner.

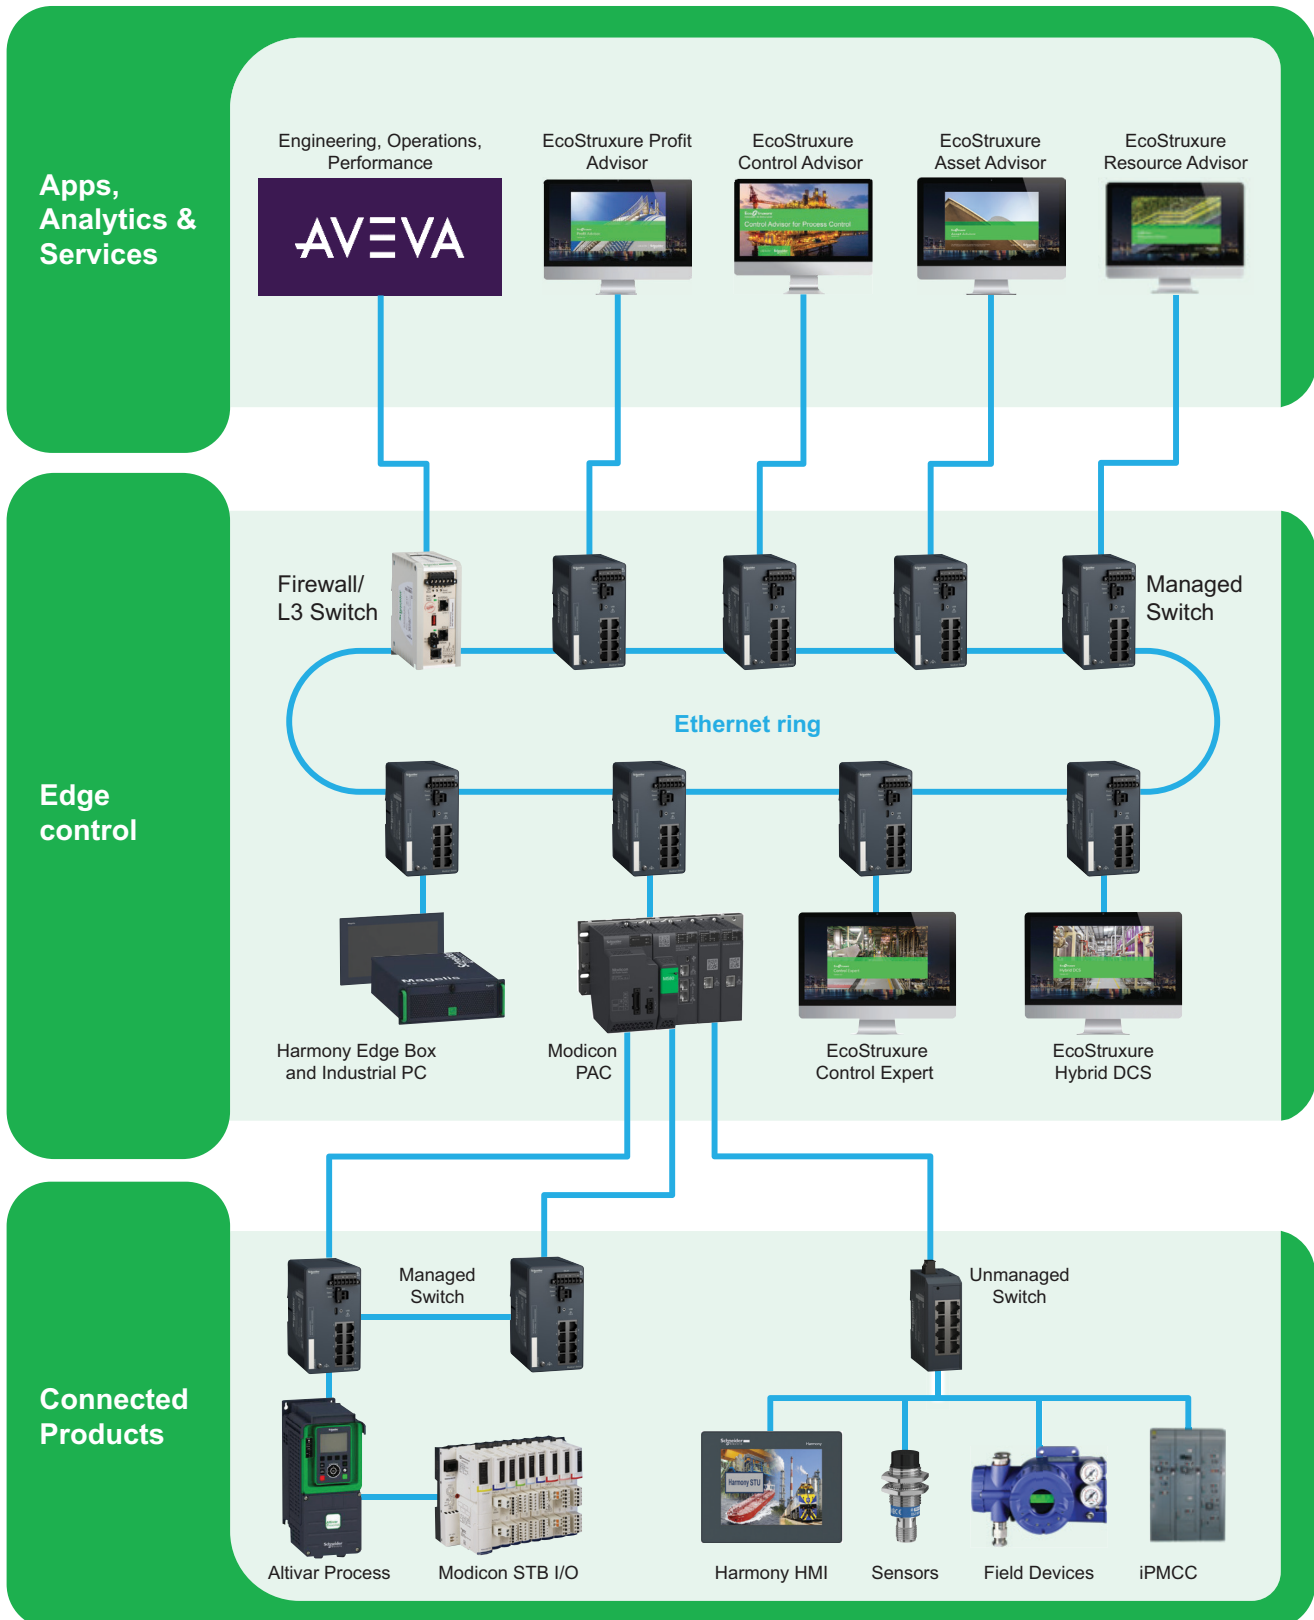

Ethernet Networking offers

Based on the complexity and application, we provide networking products in different categories and levels, covering unmanaged switches, managed switches and firewalls.



Industrial Ethernet Switch

Standard Unmanaged Switch,
IP67 Unmanaged Switch

Device type			Standard Unmanaged Switch, 5TX	Standard Unmanaged Switch, 4TX/1FX-MM	Standard Unmanaged Switch, 8TX	Standard Unmanaged Switch, 6TX/2FX-MM	Standard Unmanaged Switch, 6TX/2FX-SM	IP67 Unmanaged Switch, 5TX
								
Interfaces	Copper cable ports	Number and type	5 x 10/100BASE-TX ports	4 x 10/100BASE-TX ports	8 x 10/100BASE-TX ports	6 x 10/100BASE-TX ports		5 x 10/100BASE-TX ports
		Shielded connectors	RJ45					M12 (type D, female)
		Medium	Shielded twisted pair, category CAT 5E					
		Total length of pair	100 m/328 ft					
	Fiber optic ports	Number and type	–	1 x 100BASE-FX port	–	2 x 100BASE-FX port	–	–
		Connectors	–	Duplex SC	–	Duplex SC	–	–
		Medium	–	Multimode fiber	–	Multimode fiber	Singlemode fiber	–
	Length of fiber	50/125 µm	–	5,000 m/16,404 ft (1)	–	5,000 m/16,404 ft (1)	–	–
		62.2/125 µm	–	4,000 m/13,123 ft (1)	–	4,000 m/13,123 ft (1)	–	–
		9/125 µm	–				30,000 m/98,425 ft (2)	–
Attenuation analysis	50/125 µm fiber	–	–	8 dB	–	8 dB	–	–
		62.2/125 µm fiber	–	11 dB	–	11 dB	–	–
		9/125 µm fiber	–				16 dB	–
	Ethernet services	Configuration	–					
Redundancy			–					
Power supply	Voltage		12...24 V $\overline{\text{DC}}$ (9.6...32 V) SELV					24 V $\overline{\text{DC}}$ (18...32 V) SELV
	Consumption		1.3 W	2.4 W	1.5 W	3.8 W		3.2 W
	Removable terminal block		3 - pin					5 - pin, with M12 (type A, male)
Operating temperature			0...+ 60°C/+ 32...+ 140°F					
Relative humidity			10...95% non-condensing					5...100%
Degree of protection			IP 30					IP 67
Dimensions	W x H x D		26 x 102 x 79 mm/1.02 x 4.01 x 3.11 in.		38 x 102 x 79 mm/1.50 x 4.02 x 3.11 in.	45 x 110 x 88 mm/1.77 x 4.33 x 3.46 in.		60 x 126 x 31 mm/2.36 x 4.96 x 1.22 in.
Mounting			On symmetrical DIN rail, 35 mm/1.38 in. wide					On a flat surface
Weight			0.125 kg/0.275 lb	0.130 kg/0.285 lb	0.150 kg/0.331 lb	0.235 kg/0.518 lb		0.210 kg/0.463 lb
Conforming to standards			IEC/EN 61131-2, UL 61010-1, UL 61010-2-201, CAN/CSA C22.2 No. 61010-1, CAN/CSA C22.2 No. 61010-2-201					IEC/EN 61131-2, UL 508, CAN/CSA C22.2 No. 142
LED indicators			Power supply, link status, data status					Power supply, link status
Alarm relay			–		–			
Reference			MCSESU053FN0	MCSESU053F1CU0	MCSESU083FN0	MCSESU083F2CU0	MCSESU083F2CS0	TCSESU051F0
Page			25					

(1) Length dependent on the attenuation analysis and attenuation of the fiber (typical value: 2,000 m/6,561 ft).

(2) Length dependent on the attenuation analysis and attenuation of the fiber (typical value: 15,000 m/49,212 ft).



Industrial Ethernet Switch
Premium Unmanaged Switch

Device type			Premium Unmanaged Switch, 4TX/1FX-MM		Premium Unmanaged Switch, 4TX/1FX-SM		Premium Unmanaged Switch, 8TX		Premium Unmanaged Switch, 7TX/2FX-MM		Premium Unmanaged Switch, 7TX/2FX-SM		
													
Interfaces	Copper cable ports	Number and type	4 x 10/100BAST-TX ports					8 x 10/100BASE-TX ports		7 x 10/100BAST-TX ports			
		Shielded connectors	RJ45										
		Medium	Shielded twisted pair, category CAT 5E										
		Total length of pair	100 m/328 ft										
	Fiber optic ports	Number and type	1 x 100BASE-FX port					—		2 x 100BASE-FX port			
		Connectors	Duplex SC					—		Duplex SC			
		Medium	Multimode fiber		Single-mode fiber			—		Multimode fiber		Single-mode fiber	
	Length of fiber	50/125 µm	5,000 m/16,404 ft (1)			—			5,000 m/16,404 ft (1)		—		
		62.2/125 µm	4,000 m/13,123 ft (1)			—			4,000 m/13,123 ft (1)		—		
		9/125 µm	—			30,000 m/98,425 ft (2)			—		30,000 m/98,425 ft (2)		
	Attenuation analysis	50/125 µm fiber	8 dB			—			8 dB		—		
		62.2/125 µm fiber	11 dB			—			11 dB		—		
		9/125 µm fiber	—			16 dB			—		16 dB		
	Ethernet services	QoS, aging time, flow control, broadcast storm protection/threshold, multicast storm protection/threshold, port based priority, link alarm											
	Configuration	USB Master mode, USB 2.0 type A											
	Redundancy			—									
	Power supply	Voltage	12 ... 24 V $\overline{\text{DC}}$ (9.6...32 V) SELV										
Consumption		4.3 W					2.6 W		6.9 W				
Removable terminal block		6 - pin (redundant power supplies)											
Operating temperature			- 40...+ 70°C/- 40...+ 158°F										
Relative humidity			10...95% non-condensing										
Degree of protection			IP 40										
Dimensions		W x H x D	39 x 135 x 117 mm/1.53 x 5.31 x 4.61 in.					50 x 135 x 117 mm/1.97 x 5.31 x 4.50 in.		56 x 135 x 117 mm/2.20 x 5.31 x 4.61 in.			
Mounting			On symmetrical DIN rail, 35 mm/1.38 in. wide										
Weight			0.430 kg/0.948 lb					0.440 kg/0.970 lb		0.510 kg/1.124 lb			
Conforming to standards			IEC/EN 61131-2, UL 61010-1, UL 61010-2-201, CAN/CSA C22.2 No. 61010-1, CAN/CSA C22.2 No. 61010-2-201, IACS E10, UL 121201 / CSA C22.2 No. 213 Class I Division 2										
LED indicators			P1 and P2 power supplies, link status, data status										
Alarm relay			Activity, detected fault (power supply, Ethernet network, or communication port) (volt-free contact 1 A max. at 24 V $\overline{\text{DC}}$)										
Reference			TCSESPU053F1CU0		TCSESPU053F1CS0			TCSESPU083FN0		TCSESPU093F2CU0		TCSESPU093F2CS0	
Page			25										

(1) Length dependent on the attenuation analysis and attenuation of the fiber (typical value: 2,000 m/6,561 ft).
(2) Length dependent on the attenuation analysis and attenuation of the fiber (typical value: 15,000 m/49,212 ft).



Industrial Ethernet Switch
Lite Managed Switch, Basic Managed Switch

Device type			Lite Managed Switch, 4TX	Basic Managed Switch, 8TX	Basic Managed Switch, 6TX/2FX-MM	Basic Managed Switch, 6TX/3FX-MM
						
Interfaces	Copper cable ports	Number and type	4 x 10/100BASE-TX ports		8 x 10/100BASE-TX ports	
		Shielded connectors	RJ45			
		Medium	Shielded twisted pair, category CAT 5E			
		Total length of pair	100 m/328 ft			
	Fiber optic ports	Number and type	–		2 x 100BASE-FX ports	3 x 100BASE-FX ports
		Connectors	–		Duplex SC	
		Medium	–		Multimode fiber	
	Length of fiber	50/125 µm	–		5,000 m/16,404 ft (1)	
		62.2/125 µm	–		4,000 m/13,123 ft (1)	
		9/125 µm	–			
	Attenuation analysis	50/125 µm fiber	–		8 dB	
		62.2/125 µm fiber	–		11 dB	
9/125 µm fiber		–				
Ethernet services	Web Management, HTTPS, SNMP V1/V2/V3, BOOTP server, DHCP server, Log files, remote monitoring (RMON)		SNTP client, multicast filtering for optimization of the Global Data protocol, configuration via Web access, IGMP Snooping, RSTP (<i>Rapid Scanning Tree Protocol</i>), priority port			
Configuration	–		RJ11 V.24 (RS232)			
Redundancy			RSTP	HIPER-ring, RSTP, MRP		
Power supply	Voltage		12...24 V $\overline{\text{---}}$ (9.6...32 V $\overline{\text{---}}$) SELV			
	Consumption		2.35 W	6 W	8 W	9 W
	Removable terminal block		3 - pin	6 - pin (redundant power supplies)		
Operating temperature			0...+ 50 °C/+ 32...122 °F	0...+ 60 °C/+ 32...+ 140 °F		
Relative humidity			5...95% non-condensing	10...95% non-condensing		
Degree of protection			IP 30	IP 20		
Dimensions		W x H x D	25 x 114 x 79 mm/0.98 x 4.49 x 3.11 in.	47 x 131 x 111 mm/1.85 x 5.15 x 4.37 in.	74 x 131 x 111 mm/2.91 x 5.15 x 4.37 in.	
Mounting			On symmetrical DIN rail, 35 mm/1.38 in. wide			
Weight			0.103 kg/0.227 lb	0.400 kg/0.882 lb	0.410 kg/0.904 lb	
Conforming to standards			IEC/EN 61131-2, UL 61010-1, UL 61010-2-201, CAN/CSA C22.2 No. 61010-1, CAN/CSA C22.2 No. 61010-2-201	IEC/EN 61131-2, UL 508, CAN/CSA C22.2 No. 142, UL 121201 / CSA C22.2 No. 213 Class I Division 2		
LED indicators			Power supply status, link status, data rate		Power supply status, alarm relay status, active redundancy, redundancy management, port status	
Alarm relay			–		Detected fault (power supply, Ethernet network, or communication port) (volt-free contact 1 A max. at 24 V $\overline{\text{---}}$)	
Reference			TCSESL043F23F0	TCSESB083F23F0	TCSESB083F2CU0	TCSESB093F2CU0
Page			26			

(1) Length dependent on the attenuation analysis and attenuation of the fiber (typical value: 2,000 m/6,561 ft).



Industrial Ethernet Switch
Standard Managed Switch

Device type			Standard Managed Switch, 4TX	Standard Managed Switch, 4TX/1FX-MM	Standard Managed Switch, 4TX/1FX-SM	Standard Managed Switch, 4TX/2FX-MM	Standard Managed Switch, 4TX/2FX-SM	Standard Managed Switch, 8TX	Standard Managed Switch, 8TX, Harsh	
										
Interfaces	Copper cable ports	Number and type	4 x 10/100BASE-TX ports						8 x 10/100BASE-TX ports	
		Shielded connectors	RJ45							
		Medium	Shielded twisted pair, category CAT 5E							
		Total length of pair	100 m/328 ft							
	Fiber optic ports	Number and type	–		1 x 100BASE-FX port		2 x 100BASE-FX ports		–	
		Connectors	–		Duplex SC		–		–	
		Medium	–		Multimode fiber		Single-mode fiber		–	
	Length of fiber	50/125 µm	–		5,000 m/16,404 ft (1)		–		–	
		62.2/125 µm	–		4,000 m/13,123 ft (1)		–		–	
		9/125 µm	–		30,000 m/98,425 ft (2)		–		–	
Attenuation analysis	50/125 µm fiber	–		8 dB		–		–		
	62.2/125 µm fiber	–		11 dB		–		–		
	9/125 µm fiber	–		16 dB		–		–		
Ethernet services		Web Management, SNMP V1/V2/V3, BOOTP server, DHCP server, Ethernet TCP/IP, SSH, HTTP, HTTPS, SFTP, LLDP, SNMP-Traps and SYSLOG, IGMP Snooping, VLAN, Telnet, TFTP, address conflict detection, port monitoring, port mirroring, bandwidth management, MAC notification, TCP dump, link flap detection, RMON (remote network monitoring), self test, signal contact, port hardening, password protection, RADIUS assignment, DoS prevention, role-based access control, audit trail, PTP, TSN, IPv6								
Configuration		USB Type- C (3)								
Redundancy			HIPER-ring, RSTP, MRP, link aggregation, link backup, redundant coupling							
Power supply	Voltage	12...24 V $\overline{\text{---}}$ (9.6...32 V $\overline{\text{---}}$) SELV								
	Consumption	5 W	6 W		7 W		6 W			
	Removable terminal block	6-pin (redundant power supplies)								
Operating temperature			0...+ 60°C/+ 32...+ 140°F						–40...+ 70°C/ –40...+ 158°F	
Relative humidity			1...95% non-condensing							
Degree of protection			IP 30							
Dimensions		W x H x D	57 x 142.8 x 117.6 mm/2.24 x 5.62 x 4.57 in.						73 x 142.8 x 117.6 mm/2.87 x 5.62 x 4.57 in.	
Mounting			On symmetrical DIN rail, 35 mm/1.38 in. wide							
Weight			0.380 kg/0.837 lb	0.420 kg/0.925 lb						0.500 kg/1.102 lb
Conforming to standards			IEC/EN 61131-2, UL 61010-1, UL 61010-2-201, CAN/CSA C22.2 No. 61010-1, CAN/CSA C22.2 No. 61010-2-201, UL 121201 / CSA C22.2 No. 213 Class I Division 2, IEC/EN 60079-0, IEC/EN 60079-15, IACS E10, IEC 50121-4, IEC 61850-3							
LED indicators			Power supply status, device status, storage medium status, port status							
Alarm relay			Detected fault (temperature, ring redundancy, connection errors, external memory, power supply), (volt-free contact 1 A max. at 24 V $\overline{\text{---}}$)							
Reference			MCSESM043F23F0	MCSESM053F1CU0	MCSESM053F1CS0	MCSESM063F2CU0	MCSESM063F2CS0	MCSESM083F23F0	MCSESM083F23F0H	
Page			26					27		

(1) Length dependent on the attenuation analysis and attenuation of the fiber (typical value: 2,000 m/6,561 ft).
(2) Length dependent on the attenuation analysis and attenuation of the fiber (typical value: 15,000 m/49,212 ft).
(3) The optional reference Memory Backup adapter is available in Separate parts and accessories for switches in [page 32](#).

Industrial Ethernet Switch
Standard Managed Switch

Device type			Standard Managed Switch, 8TX/1FX-MM		Standard Managed Switch, 8TX/1FX-SM		Standard Managed Switch, 8TX/2FX-MM		Standard Managed Switch, 8TX/2FX-MM, Harsh		Standard Managed Switch, 8TX/2FX-SM		Standard Managed Switch, 8TX/2FX-SM, Harsh					
																		
Interfaces	Copper cable ports	Number and type	8 x 10/100BASE-TX ports															
		Shielded connectors	RJ45															
		Medium	Shielded twisted pair, category CAT 5E															
		Total length of pair	100 m/328 ft															
	Fiber optic ports	Number and type	1 x 100BASE-FX port						2 x 100BASE-FX ports									
		Connectors	Duplex SC															
		Medium	Multimode fiber				Single-mode fiber				Multimode fiber				Single-mode fiber			
		Length of fiber	50/125 µm	5,000 m/16,404 ft (1)				—				5,000 m/16,404 ft (1)				—		
	62.2/125 µm		4,000 m/13,123 ft (1)				—				4,000 m/13,123 ft (1)				—			
	9/125 µm		—				30,000 m/98,425 ft (2)				—				30,000 m/98,425 ft (2)			
	Attenuation analysis	50/125 µm fiber	8 dB				—				8 dB				—			
		62.2/125 µm fiber	11 dB				—				11 dB				—			
9/125 µm fiber		—				16 dB				—				16 dB				
Ethernet services	Web Management, SNMP V1/V2/V3, BOOTP server, DHCP server, Ethernet TCP/IP, SSH, HTTP, HTTPS, SFTP, LLDP, SNMP-Traps and SYSLOG, IGMP Snooping, VLAN, Telnet, TFTP, address conflict detection, port monitoring, port mirroring, bandwidth management, MAC notification, TCP dump, link flap detection, RMON (remote network monitoring), self test, signal contact, port hardening, password protection, RADIUS assignment, DoS prevention, role-based access control, audit trail, PTP, TSN, IPv6																	
Configuration	USB Type-C (3)																	
Redundancy			HIPER-ring, RSTP, MRP, link aggregation, link backup, redundant coupling															
Power supply	Voltage	12...24 V $\overline{\text{---}}$ (9.6...32 V $\overline{\text{---}}$) SELV																
	Consumption	7 W						8 W										
	Removable terminal block	6-pin (redundant power supplies)																
Operating temperature			0...+ 60°C/+ 32...+ 140°F						-40...+ 70°C/ -40...+ 158°F		0...+ 60°C/+ 32...+ 140°F		-40...+ 70°C/ -40...+ 158°F					
Relative humidity			1...95% non-condensing															
Degree of protection			IP 30															
Dimensions		W x H x D	73 x 142.8 x 117.6 mm/2.87 x 5.62 x 4.57 in.															
Mounting			On symmetrical DIN rail, 35 mm/1.38 in. wide															
Weight			0.500 kg/1.102 lb						0.570 kg/1.256 lb		0.500 kg/1.102 lb		0.570 kg/1.256 lb					
Conforming to standards			IEC/EN 61131-2, UL 61010-1, UL 61010-2-201, CAN/CSA C22.2 No. 61010-1, CAN/CSA C22.2 No. 61010-2-201, UL 121201 / CSA C22.2 No. 213 Class I Division 2, IEC/EN 60079-0, IEC/EN 60079-15, IACS E10, IEC 50121-4, IEC 61850-3															
LED indicators			Power supply status, device status, storage medium status, port status															
Alarm relay			Detected fault (temperature, ring redundancy, connection errors, external memory, power supply), (volt-free contact 1 A max. at 24 V $\overline{\text{---}}$)															
Reference			MCSESM093F1CU0		MCSESM093F1CS0		MCSESM103F2CU0		MCSESM103F2CU0H		MCSESM103F2CS0		MCSESM103F2CS0H					
Page			27															

(1) Length dependent on the attenuation analysis and attenuation of the fiber (typical value: 2,000 m/6,561 ft).
(2) Length dependent on the attenuation analysis and attenuation of the fiber (typical value: 15,000 m/49,212 ft).
(3) The optional reference Memory Backup adapter is available in Separate parts and accessories for switches in [page 32](#).



Industrial Ethernet Switch
Standard Managed Switch

Device type			Standard Managed Switch, 8TX/4GE-TX	Standard Managed Switch, 8TX/4GE-SFP	Standard Managed Switch, 16TX
					
Interfaces	Copper cable ports	Number and type	8 x 10/100BASE-TX + 4 x 10/100/1000BASE-TX ports		16 x 10/100BASE-TX ports
		Shielded connectors	RJ45		
		Medium	Shielded twisted pair, category CAT 5E		
		Total length of pair	100 m/328 ft		
	Fiber optic ports	Number and type	–	4 x 100/1000BASE-SFP ports	–
		Connectors	–		–
		Medium	–	SFP (1)	–
	Length of fiber	50/125 µm	–		
		62.2/125 µm	–		
		9/125 µm	–		
Attenuation analysis	50/125 µm fiber	–			
	62.2/125 µm fiber	–			
	9/125 µm fiber	–			
Ethernet services		Web Management, SNMP V1/V2/V3, BOOTP server, DHCP server, Ethernet TCP/IP, SSH, HTTP, HTTPS, SFTP, LLDP, SNMP-Traps and SYSLOG, IGMP Snooping, VLAN, Telnet, TFTP, address conflict detection, port monitoring, port mirroring, bandwidth management, MAC notification, TCP dump, link flap detection, RMON (remote network monitoring), self test, signal contact, port hardening, password protection, RADIUS assignment, DoS prevention, role-based access control, audit trail, PTP, TSN, IPv6			
Configuration		USB Type-C (2)			
Redundancy			HIPER-ring, RSTP, MRP, link aggregation, link backup, redundant coupling		
Power supply	Voltage		12...24 V $\overline{\text{---}}$ (9.6...32 V $\overline{\text{---}}$) SELV		
	Consumption		9 W	9 W + 1 W per SFP fiber optic module	10 W
	Removable terminal block		6-pin (redundant power supplies)		
Operating temperature			0...+ 60°C/+ 32...+ 140°F		
Relative humidity			1...95% non-condensing		
Degree of protection			IP 30		
Dimensions	W x H x D		73 x 142.8 x 117.6 mm/2.87 x 5.62 x 4.57 in.		108.8 x 142.8 x 117.6 mm/4.28 x 5.62 x 4.57 in.
Mounting			On symmetrical DIN rail, 35 mm/1.38 in. wide		
Weight			0.700 kg/1.543 lb	0.570 kg/1.256 lb	0.880 kg/1.940 lb
Conforming to standards			IEC/EN 61131-2, UL 61010-1, UL 61010-2-201, CAN/CSA C22.2 No. 61010-1, CAN/CSA C22.2 No. 61010-2-201, UL 121201 / CSA C22.2 No. 213 Class I Division 2, IEC/EN 60079-0, IEC/EN 60079-15, IACS E10, IEC 50121-4 (3), IEC 61850-3		
LED indicators			Power supply status, device status, storage medium status, port status		
Alarm relay			Detected fault (temperature, ring redundancy, connection errors, external memory, power supply), (volt-free contact 1 A max. at 24 V $\overline{\text{---}}$)		
Reference			MCSESM123F23G0	MCSESM123F2LG0	MCSESM163F23F0
Page			27		28

(1) These optional references of SFP transceivers are available in Separate parts and accessories for switches in [page 32](#).
(2) The optional reference Memory Backup adapter is available in Separate parts and accessories for switches in [page 32](#).
(3) Not applicable to Standard Managed Switch, 16TX - MCSESM163F23F0.

Industrial Ethernet Switch
Standard Managed Switch,
PoE Managed Switch

Device type			Standard Managed Switch, 16TX/4GE-SFP	Standard Managed Switch, 20TX/4GE-SFP	PoE Managed Switch, 8GE-TX	PoE Managed Switch, 8GE-TX, Extended temperature
						
Interfaces	Copper cable ports	Number and type	16 x 10/100BASE-TX ports		8 x 10/100/1000BASE-TX ports with PoE	
		Shielded connectors	RJ45			
		Medium	Shielded twisted pair, category CAT 5E			
	Fiber optic ports	Total length of pair	100 m/328 ft			
		Number and type	4 x 100/1000BASE-SFP ports		–	
		Connectors	–			
	Length of fiber	Medium	SFP (1)		–	
		50/125 µm	–			
		62.2/125 µm	–			
		9/125 µm	–			
Attenuation analysis	50/125 µm fiber	–				
	62.2/125 µm fiber	–				
	9/125 µm fiber	–				
Ethernet services		Web Management, SNMP V1/V2/V3, BOOTP server, DHCP server, Ethernet TCP/IP, SSH, HTTP, HTTPS, SFTP, LLDP, SNMP-Traps and SYSLOG, IGMP Snooping, VLAN, Telnet, TFTP, address conflict detection, port monitoring, port mirroring, bandwidth management, MAC notification, TCP dump, link flap detection, RMON (remote network monitoring), self test, signal contact, port hardening, password protection, RADIUS assignment, DoS prevention, role-based access control, audit trail, PTP, TSN, IPv6				
Configuration		USB Type-C (2)				
Redundancy			HIPER-ring, RSTP, MRP, link aggregation, link backup, redundant coupling			
Power supply	Voltage		12...24 V $\overline{\text{---}}$ (9.6...32 V $\overline{\text{---}}$) SELV		24 V $\overline{\text{---}}$ (18...30 V $\overline{\text{---}}$) SELV	
	Consumption		15 W + 1 W per SFP fiber optic module	16 W + 1 W per SFP fiber optic module	106 W (90W for PoE Power Output)	
	Removable terminal block		6 - pin (redundant power supplies)			
Operating temperature			0...+ 60°C/+ 32...+ 140°F		–40...+ 70°C/ –40...+ 158°F	
Relative humidity			1...95% non-condensing			
Degree of protection			IP 30			
Dimensions		W x H x D	108.8 x 142.8 x 117.6 mm/4.28 x 5.62 x 4.57 in.		122.4 x 144.2 x 117.15 mm/4.82 x 5.68 x 4.61 in.	
Mounting			On symmetrical DIN rail, 35 mm/1.38 in. wide			
Weight			0.95 kg/2.0943 lb	1.05 kg/2.315 lb	1.4 kg/3.086 lb	
Conforming to standards			IEC/EN 61131-2, UL 61010-1, UL 61010-2-201, CAN/CSA C22.2 No. 61010-1, CAN/CSA C22.2 No. 61010-2-201, UL 121201 / CSA C22.2 No. 213 Class I Division 2, IEC/EN 60079-0, IEC/EN 60079-15, IACS E10, IEC 61850-3			
LED indicators			Power supply status, device status, storage medium status, port status			
Alarm relay			Detected fault (temperature, ring redundancy, connection errors, external memory, power supply), (volt-free contact 1 A max. at 24 V $\overline{\text{---}}$)			
Reference			MCSESM203F4LG0	MCSESM243F4LG0	MCSESP083F23G0	MCSESP083F23G0T
Page			28			

(1) These optional references of SFP transceivers are available in Separate parts and accessories for switches in [page 32](#).
(2) The optional reference Memory Backup adapter is available in Separate parts and accessories for switches in [page 32](#).

Industrial Ethernet Switch
Extended Managed Switch

Device type			Extended Managed Switch, 8TX		Extended Managed Switch, 8TX, Harsh		Extended Managed Switch, 8TX/2FX-MM		Extended Managed Switch, 8TX/2FX-MM, Harsh		Extended Managed Switch, 8TX/2FX-SM		Extended Managed Switch, 8TX/2FX-SM, Harsh	
														
Interfaces	Copper cable ports	Number and type	8 x 10/100BASE-TX ports											
		Shielded connectors	RJ45											
		Medium	Shielded twisted pair, category CAT 5E											
		Total length of pair	100 m/328 ft											
	Fiber optic ports	Number and type	–				2 x 100BASE-FX ports							
		Connectors	–				Duplex SC							
		Medium	–				Multimode fiber				Single-mode fiber			
	Length of fiber	50/125 µm	–				5,000 m/16,404 ft (1)				–			
		62.2/125 µm	–				4,000 m/13,123 ft (1)				–			
		9/125 µm	–								30,000 m/98,425 ft (2)			
Attenuation analysis	50/125 µm fiber	–				8 dB				–				
	62.2/125 µm fiber	–				11 dB				–				
	9/125 µm fiber	–								16 dB				
Ethernet services	Web Management, SNMP V1/V2/V3, BOOTP server, DHCP server, Ethernet TCP/IP, SSH, HTTP, HTTPS, SFTP, LLDP, SNMP-Traps and SYSLOG, IGMP Snooping, VLAN, Telnet, TFTP, address conflict detection, port monitoring, port mirroring, bandwidth management, MAC notification, TCP dump, link flap detection, RMON (remote network monitoring), self test, signal contact, port hardening, password protection, RADIUS assignment, DoS prevention, role-based access control, audit trail, PTP, TSN, IPv6													
Configuration	USB Type-C (3)													
Redundancy			HIPER-ring, RSTP, MRP, link aggregation, link backup, redundant coupling, dual-RSTP ring coupling											
Power supply	Voltage	12...24 V $\overline{---}$ (9.6...32 V $\overline{---}$) SELV												
	Consumption	6 W				8 W								
	Removable terminal block	6 - pin (redundant power supplies)												
Operating temperature			0...+ 60°C/+ 32...+ 140°F		–40...+ 70°C/–40...+ 158°F		0...+ 60°C/+ 32...+ 140°F		–40...+ 70°C/–40...+ 158°F		0...+ 60°C/+ 32...+ 140°F		–40...+ 70°C/–40...+ 158°F	
Relative humidity			1...95% non-condensing											
Degree of protection			IP 30											
Dimensions		W x H x D	73 x 142.8 x 117.6 mm/2.87 x 5.62 x 4.57 in.											
Mounting			On symmetrical DIN rail, 35 mm/1.38 in. wide											
Weight			0.420 kg/0.925 lb		0.500 kg/1.102 lb		0.570 kg/1.256 lb		0.570 kg/1.256 lb		0.500 kg/1.102 lb		0.570 kg/1.256 lb	
Conforming to standards			IEC/EN 61131-2, UL 61010-1, UL 61010-2-201, CAN/CSA C22.2 No. 61010-1, CAN/CSA C22.2 No. 61010-2-201, UL 121201 / CSA C22.2 No. 213 Class I Division 2, IEC/EN 60079-0, IEC/EN 60079-15, IACS E10, IEC 61850-3											
LED indicators			Power supply status, device status, storage medium status, port status											
Alarm relay			Detected fault (temperature, ring redundancy, connection errors, external memory, power supply) (volt-free contact 1 A max. at 24 V $\overline{---}$)											
Reference			MCSESM083F23F1		MCSESM083F23F1H		MCSESM103F2CU1		MCSESM103F2CU1H		MCSESM103F2CS1		MCSESM103F2CS1H	
Page			28											

(1) Length dependent on the attenuation analysis and attenuation of the fiber (typical value: 2,000 m/6,561 ft).
(2) Length dependent on the attenuation analysis and attenuation of the fiber (typical value: 15,000 m/49,212 ft).
(3) The optional reference Memory Backup adapter is available in Separate parts and accessories for switches in [page 32](#).

Device type			Redundancy Switch, 4TX	Redundancy Switch, 4TX, Coated	Redundancy Switch, 2TX/2SFP	Redundancy Switch, 2TX/2SFP, Coated	
							
Interfaces	Copper cable ports	Number and type	4 x 10/100BASE-TX ports			2 x 10/100BASE-TX ports	
		Shielded connectors	RJ45				
		Medium	Shielded twisted pair, category CAT 5E				
		Total length of pair	100 m/328 ft				
	Fiber optic ports	Number and type	–			2 x 100BASE-SFP ports	
		Connectors	–				
	Length of fiber	Medium	–				
		50/125 µm	–				
		62.2/125 µm	–				
		9/125 µm	–				
	Attenuation analysis	50/125 µm fiber	–				
		62.2/125 µm fiber	–				
9/125 µm fiber		–					
Ethernet services		Web Management, SNMP V1/V2/V3, BOOTP server, DHCP server, Ethernet TCP/IP, SSH, HTTP, HTTPS, SFTP, LLDP, SNMP-Traps and SYSLOG, IGMP Snooping, VLAN, Telnet, TFTP, address conflict detection, port monitoring, port mirroring, bandwidth management, MAC notification, TCP dump, link flap detection, RMON (remote network monitoring), self test, signal contact, password protection, RADIUS assignment, DoS prevention, audit trail, PTP					
Configuration		USB Type-A (2), V.24					
Redundancy			RSTP, MRP, link aggregation, link backup, PRP				
Power supply	Voltage		12...48 V $\overline{\text{---}}$ (9.6...60 V $\overline{\text{---}}$) / 24 V~(18...30 V~) SELV				
	Consumption		7 W			9 W	
	Removable terminal block		6 - pin (redundant power supplies)				
Operating temperature			0...+ 60°C/+ 32...+ 140°F	-40...+ 60°C/-40...+ 140°F		0...+ 60°C/+ 32...+ 140°F	-40...+ 60°C/-40...+ 140°F
Relative humidity			10...95% non-condensing				
Degree of protection			IP 20				
Dimensions		W x H x D	46 x 130 x 105 mm/1.81 x 5.11 x 4.13in.				
Mounting			On symmetrical DIN rail, 35 mm/1.38 in. wide				
Weight			0.290 kg/0.639 lb			0.291 kg/0.641 lb	
Conforming to standards			IEC/EN 61131-2, UL 61010-2-201 / CSA C22.2 No 61010-2-201				
LED indicators			Power supply status, device status, storage medium status, redundancy status, port status				
Alarm relay			Detected fault (temperature, ring redundancy, connection errors, external memory, power supply) (volt-free contact 1000 mA max. at 24 V $\overline{\text{---}}$)				
Reference			MCSESR043F23F0	MCSESR043F23F0C	MCSESR043F2LM0	MCSESR043F2LM0C	
Page			29				

(1) These optional references of SFPtransceivers are available in Separate parts and accessories for switches on page 32. Only 100BASE SFPtransceivers are applicable for redundancy managed switches.
(2) The optional reference Memory Backup adapter is available in Separate parts and accessories for switches on page 32.

Device type			Tofino Industrial Firewall TX/TX	Industrial Firewall/Router TX/TX	Industrial Firewall/Router TX/MM
					
Interfaces	Copper cable ports	Number and type	2 x 10/100 BASE-TX ports for internal and external networks		
		Shielded connectors	RJ45 type		
		Medium	Shielded twisted pair, category CAT 5E		
		Total length of pair	100 m/328 ft		
	Fiber optic ports	Number and type	–		
		Connectors	–		
		Medium	–		
	Length of fiber	50/125 µm	–		
		62.2/125 µm	–		
		9/125 µm	–		
Attenuation analysis	50/125 µm fiber	–			
	62.2/125 µm fiber	–			
	9/125 µm	–			
Configuration tools		PC-based software tool (Tofino Configurator) that is used to create configuration files for Tofino Firewall		V.24 connection; Ethernet Switch Configurator protocol via the application Ethernet Switch Configurator; Memory Backup Adapter; Graphical User Interface	
Security capabilities			Built-in security modules (Firewall, Event Logger, Modbus/TCP Enforcer, NetConnect), optional field upgradeable modules for adding the new LSM modules for other protocols (OPC, EIP, DNP3, IEC104 and GOOSE), Tofino Configurator for creating secure zones, DoS prevention and MAC address filtering for encryption protocol.		
Power supply	Voltage		12...24 V  (9.6...32 V) SELV		
	Consumption		6.9 W		
	Removable terminal block		6-pin (Redundant power supplies)		
Operating temperature			0° to 60° C/ 32° to 140° F		
Relative humidity			10 to 95% non-condensing		
Degree of protection			IP 20		
Dimensions		W x H x D	60 x 145 x 125 mm /2.36 x 5.71 x 4.92 in.		
Mounting			On symmetrical DIN rail, 35 mm/1.38 in. wide		
Weight			0.660 kg/1.455 lb	0.610 kg/1.345 lb	
Conforming to standards			IEC 60068-2-6, IEC 60068-2-27, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-9, EN 55022 class A/FCC 47 CFR Part 15 class A cUL 508:1988, C€ (1), German Lloyd VI-7-3 Part 1 Ed. 2003, RoHS Directive, CSA C22.2 No 213 Class I Division 2, UL 1604 Class 1 Division 2, CSA C22.2 No 214, UL 508, EN/IEC 61131-2		
LED indicators			Power supply, link activity, detected fault, mode, save/load, reset		
References			TCSEFEA23F3F22		
Page			30		
			TCSEFEC23F3F21		TCSEFEC23FCF21

(1) The Tofino Industrial Ethernet Firewalls TCSEFEA23F3F20 and TCSEFEA23F3F21 are also compliant with Germanischer Lloyd VI-7-3 Part 1 Ed. 2003 certification.
(2) Length dependent on the attenuation analysis and attenuation of the fiber (typical value: 2,000 m/6,561 ft).
(3) Length dependent on the attenuation analysis and attenuation of the fiber (typical value: 15,000 m/49,212 ft).

Features		Unmanaged Switches			Managed Switches				
		Standard	Premium	IP67	Lite	Basic	Standard	Extended	PoE
		MCSESU●	TCSESPU●	TCSESU051●	TCSESL●	TCSESB●	MCSESM●0(H)	MCSESM●1(H)	MCSESP●
Number of Ports (Copper, Fiber Optic, SFP)		5..8	5..9	5	4	8..9	4..24	8..10	8
Max. Number of Copper Ports		8	7	5	4	8 (6 (1))	20	8	8
Max. Number of Fiber Optic or SFP Ports		2	2			3	4	2	
Max. Transition rate		100Mbps	100Mbps	100Mbps	100Mbps	100Mbps	1000Mbps	100Mbps	1000Mbps
Operating Temperature		0..60°C	-40..70°C	0..60°C	0..60°C	0..60°C	0..60°C (-40..70°C (2))	0..60°C (-40..70°C (2))	0..60°C (-40..70°C (2))
IP Degree of Protection		IP30	IP40	IP67	IP30	IP20	IP30	IP30	IP30
Availability Hazardous Location		–	✓	–	–		✓	✓	✓
Redundant Power Supply Input		–	✓	–	–	✓	✓	✓	✓
Signal Contact		–	✓	–	–	✓	✓	✓	✓
Web interface	HTTP	–	–	–	–	✓	✓	✓	✓
	HTTPS	–	–	–	✓	✓	✓	✓	✓
Diagnostics	SNMP	–	–	–	✓	✓	✓	✓	✓
	Alarms	–	✓	–	✓	✓	✓	✓	✓
	LLDP	–	–	–	✓	✓	✓	✓	✓
	Port Mirroring	–	–	–		✓	✓	✓	✓
Cyber Security	Password	–	–	–	✓	✓	✓	✓	✓
	Access Control List (IP or MAC)	–	–	–	–	–	✓	✓	–
	Denial-of-Service	–	–	–	–	–	✓	✓	✓
	Local Role-based Access Control	–	–	–	–	–	✓	✓	✓
Redundancy	RSTP	–	–	–	✓	✓	✓	✓	✓
	MRP	–	–	–	–	✓	✓	✓	✓
	HIPER-ring	–	–	–	–	✓	✓	✓	–
	Link aggregation	–	–	–	–	–	✓	✓	✓
	Link backup	–	–	–	–	–	✓	✓	✓
	Redundant network/ring coupling	–	–	–	–	–	✓	✓	–
	Dual RSTP ring coupling	–	–	–	–	–	–	✓	–
	PRP	–	–	–	–	–	–	–	✓
	HSR	–	–	–	–	–	–	–	–
	DLR	–	–	–	–	–	–	–	–
Switching/ Performance	QoS	–	✓		✓	✓	✓	✓	✓
	Multicast IGMP/GMRP	–	–	–	–	✓	✓	✓	✓
	Flow Control	–	–	–	–	–	✓	✓	✓
Filtering	VLAN	–	–	–	–	–	✓	✓	✓
	Broadcast Limiting	–	–	–	–	–	✓	✓	✓
Time	SNTP	–	–	–	–	✓	✓	✓	✓
	PTP	–	–	–	–	–	✓	✓	✓
Advanced Function	IPv6	–	–	–	–	–	✓	✓	–
	TSN	–	–	–	–	–	✓	✓	–
	OPC UA	–	–	–	–	–	✓ (3)	✓ (3)	✓ (3)

(1) Max. 6 copper ports for fiber optic variants.

(2) Only for harsh, extended temperature or coated variants.

(3) To be supported with the future software upgrade.



MCSESU053FN0



MCSESU053F1CU0



MCSESU083FN0

MCSESU083F2CU0
MCSESU083F2CS0TCSESPU053F1CU0
TCSESPU053F1CS0

TCSESPU083FN0

TCSESPU093F2CU0
TCSESPU093F2CS0

TCSESU051F0

Standard unmanaged switches, 5~8 ports, twisted pair and fiber optic

References

Description	Interfaces	Reference	Weight kg/ lb
Standard Unmanaged Switch 5TX	■ 5 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors	MCSESU053FN0	0.125/ 0.275
Standard Unmanaged Switch 4TX/1FX-MM	■ 4 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 1 x 100BASE-FX port (multimode fiber), duplex SC connector	MCSESU053F1CU0	0.130/ 0.285
Standard Unmanaged Switch 8TX	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors	MCSESU083FN0	0.150/ 0.331
Standard Unmanaged Switch 6TX/2FX-MM	■ 6 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-FX port (multimode fiber), duplex SC connector	MCSESU083F2CU0	0.235/ 0.518
Standard Unmanaged Switch 6TX/2FX-SM	■ 6 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-FX port (single mode fiber), duplex SC connectors	MCSESU083F2CS0	0.235/ 0.518

Premium unmanaged switches, 5~9 ports, twisted pair and fiber optic

References

Description	Interfaces	Reference	Weight kg/ lb
Premium Unmanaged Switch 4TX/1FX-MM	■ 4 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 1 x 100BASE-FX port (multimode fiber), duplex SC connector	TCSESPU053F1CU0	0.430/ 0.948
Premium Unmanaged Switch 4TX/1FX-SM	■ 4 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 1 x 100BASE-FX port (singlemode fiber), duplex SC connectors	TCSESPU053F1CS0	0.430/ 0.948
Premium Unmanaged Switch 8TX	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors	TCSESPU083FN0	0.440/ 0.970
Premium Unmanaged Switch 7TX/2FX-MM	■ 7 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-FX ports (multimode fiber), duplex SC connector	TCSESPU093F2CU0	0.510/ 1.124
Premium Unmanaged Switch 7TX/2FX-SM	■ 7 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-FX ports (singlemode fiber), duplex SC connector	TCSESPU093F2CS0	0.510/ 1.124

IP67 unmanaged switch, 5 ports, twisted pair

References

Description	Interfaces	Reference	Weight kg/ lb
IP67 Unmanaged Switch 5TX	■ 5 x 10/100BASE-TX ports (copper cable), shielded M12 type D connectors, IP67	TCSESU051F0	0.210/ 0.463



TCSESL043F23F0



TCSESB083F23F0



TCSESB083F2CU0



TCSESB093F2CU0



MCSESM043F23F0

MCSESM053F1CU0
MCSESM053F1CS0MCSESM063F2CU0
MCSESM063F2CS0

Lite managed switch, 4 ports, twisted pair

References

Description	Interfaces	Reference	Weight kg/ lb
Lite Managed Switch 4TX	■ 4 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors	TCSESL043F23F0	0.103/ 0.227

Basic managed switches, 8 and 9 ports, twisted pair and fiber optic

References

Description	Interfaces	Reference	Weight kg/ lb
Basic Managed Switch 8TX	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors	TCSESB083F23F0	0.400/ 0.882
Basic Managed Switch 6TX/2FX-MM	■ 6 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-FX ports (multimode fiber), duplex SC connector	TCSESB083F2CU0	0.410/ 0.904
Basic Managed Switch 6TX/3FX-MM	■ 6 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 3 x 100BASE-FX ports (multimode fiber), duplex SC connector	TCSESB093F2CU0	0.410/ 0.904

Standard managed switches, 4~6 ports, twisted pair and fiber optic

References

Description	Interfaces	Reference	Weight kg/ lb
Standard Managed Switch 4TX	■ 4 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors	MCSESM043F23F0	0.380/ 0.837
Standard Managed Switch 4TX/1FX-MM	■ 4 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 1 x 100BASE-FX ports (multimode fiber), duplex SC connector	MCSESM053F1CU0	0.420/ 0.925
Standard Managed Switch 4TX/1FX-SM	■ 4 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 1 x 100BASE-FX ports single mode fiber, duplex SC connector	MCSESM053F1CS0	0.420/ 0.925
Standard Managed Switch 4TX/2FX-MM	■ 4 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-FX ports (multimode fiber), duplex SC connector	MCSESM063F2CU0	0.420/ 0.925
Standard Managed Switch 4TX/2FX-SM	■ 4 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-FX ports (single mode fiber), duplex SC connector	MCSESM063F2CS0	0.420/ 0.925



MCSESM083F23F0
MCSESM083F23F0H



MCSESM093F1CU0
MCSESM093F1CS0



MCSESM103F2CU0
MCSESM103F2CU0H
MCSESM103F2CS0
MCSESM103F2CS0H



MCSESM123F2LG0



MCSESM123F23G0

Standard managed switches, 8~10 ports, twisted pair and fiber optic

References

Description	Interfaces	Reference	Weight kg/ lb
Standard Managed Switch 8TX	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors	MCSESM083F23F0	0.420/ 0.925
Standard Managed Switch 8TX - Harsh	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors	MCSESM083F23F0H	0.500/ 1.102
Standard Managed Switch 8TX/1FX-MM	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 1 x 100BASE-FX ports (multimode fiber), duplex SC connector	MCSESM093F1CU0	0.500/ 1.102
Standard Managed Switch 8TX/1FX-SM	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 1 x 100BASE-FX ports (single mode fiber), duplex SC connector	MCSESM093F1CS0	0.500/ 1.102
Standard Managed Switch 8TX/2FX-MM	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors, 1 Gb ■ 2 x 100BASE-FX ports (multimode fiber), duplex SC connector	MCSESM103F2CU0	0.500/ 1.102
Standard Managed Switch 8TX/2FX-MM - Harsh	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-FX ports (multimode fiber), duplex SC connector	MCSESM103F2CU0H	0.570/ 1.256
Standard Managed Switch 8TX/2FX-SM	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-FX ports (single mode fiber), duplex SC connectors	MCSESM103F2CS0	0.500/ 1.102
Standard Managed Switch 8TX/2FX-SM - Harsh	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-FX ports (single mode fiber), duplex SC connector	MCSESM103F2CS0H	0.570/ 1.256

Standard managed switches, 12 ports (including up to 4 Gigabit ports), twisted pair and SFP

References

Description	Interfaces	Reference	Weight kg/ lb
Standard Managed Switch 8TX/4GE-SFP	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 4 x 100/1000BASE-SFP (fiber optic or copper cable)	MCSESM123F2LG0	0.570/ 1.256
Standard Managed Switch 8TX/4GE-TX	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 4 x 10/100/1000BASE-TX ports (copper cable), RJ45 shielded connectors	MCSESM123F23G0	0.700/ 1.543

Industrial Ethernet Switch

Managed switches



MCSESM163F23F0



MCSESM203F4LG0



MCSESM243F4LG0

MCSESP083F23G0
MCSESP083F23G0TMCSESM083F23F1
MCSESM083F23F1HMCSESM103F2CU1
MCSESM103F2CU1H
MCSESM103F2CS1
MCSESM103F2CS1H

Standard managed switches, 16~24 ports (including up to 4 Gigabit ports), twisted pair and SFP

References

Description	Interfaces	Reference	Weight kg/ lb
Standard Managed Switch 16TX	■ 16 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors	MCSESM163F23F0	0.880/ 1.940
Standard Managed Switch 16TX/4GE-SFP	■ 16 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 4 x 100/1000BASE-SFP (fiber optic or copper cable)	MCSESM203F4LG0	0.95/ 2.0943
Standard Managed Switch 20TX/4GE-SFP	■ 20 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 4 x 100/1000BASE-SFP (fiber optic or copper cable)	MCSESM243F4LG0	1.05/ 2.315

PoE managed switches, 8 Gigabit ports, twisted pair with PoE

References

Description	Interfaces	Reference	Weight kg/ lb
PoE Managed Switch 8GE-TX	■ 8 x 10/100/1000BASE-TX ports (copper cable), RJ45 shielded connectors	MCSESP083F23G0	1.400/ 3.086
PoE Managed Switch 8GE-TX - Harsh	■ 8 x 10/100/1000BASE-TX ports (copper cable), RJ45 shielded connectors	MCSESP083F23G0T	1.400/ 3.086

Extended managed switches, 8~10 ports, twisted pair and fiber optic

References

Description	Interfaces	Reference	Weight kg/ lb
Extended Managed Switch 8TX	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors	MCSESM083F23F1	0.420/ 0.925
Extended Managed Switch 8TX - Harsh	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors	MCSESM083F23F1H	0.500/ 1.102
Extended Managed Switch 8TX/2FX-MM	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-FX ports (multimode fiber), duplex SC connector	MCSESM103F2CU1	0.500/ 1.102
Extended Managed Switch 8TX/2FX-MM - Harsh	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-FX ports (multimode fiber), duplex SC connector	MCSESM103F2CU1H	0.570/ 1.256
Extended Managed Switch 8TX/2FX-SM	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-FX ports (single-mode fiber), duplex SC connector	MCSESM103F2CS1	0.500/ 1.102
Extended Managed Switch 8TX/2FX-SM - Harsh	■ 8 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-FX ports (single-mode fiber), duplex SC connector	MCSESM103F2CS1H	0.570/ 1.256



MCSESR043F23F0
MCSESR043F23F0C



MCSESR043F2LM0
MCSESR043F2LM0C

Redundancy Switch, 4 ports, twisted pair and SFP

References

Description	Interfaces	Reference	Weight kg/ lb
Redundancy Switch 4TX	■ 4 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors	MCSESR043F23F0	0.290/ 0.639
Redundancy Switch 4TX - Coated	■ 4 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors	MCSESR043F23F0C	0.290/ 0.639
Redundancy Switch 2TX/2SFP	■ 2 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-SFP (fiber optic or copper cable)	MCSESR043F2LM0	0.291/ 0.641
Redundancy Switch 2TX/2SFP - Coated	■ 2 x 10/100BASE-TX ports (copper cable), RJ45 shielded connectors ■ 2 x 100BASE-SFP (fiber optic or copper cable)	MCSESR043F2LM0C	0.291/ 0.641



TCSEFEA23F3F22
TCSEFEC23F3F21
TCSEFEC23FCF21

Industrial firewalls			
References			
Description	Interfaces	Reference	Weight kg/ lb
Tofino Industrial Firewall TX/TX (1)	■ 2 x 10/100BASE-TX ports (copper cable) for internal and external network connections	TCSEFEA23F3F22	0.660/ 1.455
Industrial Firewall/Router TX/TX	■ 2 x 10/100BASE-TX ports (copper cable) for internal and external network connections	TCSEFEC23F3F21	0.610/ 1.345
Industrial Firewall/Router TX/MM	■ 1 x 10/100BASE-TX port for internal network ■ 1 x 10/100BASE-TX port for external network	TCSEFEC23FCF21	0.610/ 1.345

(1) Modbus/TCP Enforcer is natively integrated in the Tofino firewall software.

Shielded copper connection cables

Ethernet shielded connection cables are available in two versions to meet the various current standards and approvals:

■ EIA/TIA 568 shielded twisted pair cables for C€ market

These cables conform to:

- EIA/TIA-568 standard, category CAT 5E
- IEC 11801/EN 50173-1 standard, class D

Their fire resistance conforms to:

- NF C32-070 standard, class C2
- IEC 322/1 standards
- Low Smoke Zero Halogen (LSZH)

■ EIA/TIA 568 shielded twisted pair cables for UL market

These cables are:

- CEC type FT-1
- NEC type CM

A range of fully shielded preassembled cables has been specially designed for use in harsh industrial environments. These cables combine a category 5E shielded cable and RJ45 connectors reinforced with a metal profile.



EIA/TIA 568 shielded twisted pair cables for C€ market

Description	Connectors	Type	Length m/ft	Reference	Weight kg/ lb
Straight-through copper cables C€ compatible	2 x RJ45 connectors For connection to terminal equipment (DTE)	Standard	2/6.56	490NTW00002	—
			5/16.40	490NTW00005	—
			12/39.37	490NTW00012	—
			40/131	490NTW00040	—
			80/262	490NTW00080	—
		Rugged	1/3.28	TCSECE3M3M1S4	—
			2/6.56	TCSECE3M3M2S4	—
			3/9.84	TCSECE3M3M3S4	—
			5/16.40	TCSECE3M3M5S4	—
			10/32.81	TCSECE3M3M10S4	—
Crossover copper cables C€ compatible	2 x RJ45 connectors For connection between hubs, switches, and transceivers	Standard	5/16.40	490NTC00005	—

EIA/TIA 568 shielded twisted pair cables for UL market

Description	Connectors	Type	Length m/ft	Reference	Weight kg/ lb
Straight-through copper cables UL compatible	2 x RJ45 connectors For connection to terminal equipment (DTE)	Standard	2/6.56	490NTW00002U	—
			5/16.40	490NTW00005U	—
			12/39.37	490NTW00012U	—
		Rugged	1/3.28	TCSECU3M3M1S4	—
			2/6.56	TCSECU3M3M2S4	—
			3/9.84	TCSECU3M3M3S4	—
			5/16.40	TCSECU3M3M5S4	—

Do it Yourself copper cable and connectors

The Do it Yourself offer consists of references for connectors (RJ45) and cable references (300 m/984 ft coil), enabling Ethernet 10/100 Mbps networks to be cabled in the field.

The maximum length of cables created in this way is 80 m/262 ft.

They are quick to assemble using a knife and simple wire cutters (no special tools are required).

Description	Characteristics	Length m/ft	Reference	Weight kg/ lb
Ethernet copper cable 4 shielded twisted pairs AWG 24	Conforms to the CE standards	300/984	TCSECE300R2	—
	Conforms to the UL standards	300/984	TCSECU300R2	—
RJ45 connector	Conforms to EIA/TIA-568-D	—	TCSEK3MDS	—
RJ45 rugged connectors	Set of 2 connectors	—	TCSEK3MR2	—
	Set of 10 connectors	—	TCSEK3MR10	—

Connection Components

SFP transceivers, memory backup adapters and cables



MCSEAAF1LFU00

SFP transceivers and memory backup adapters for switches						
Description	Fiber/TX	Certification Type	Example for max. distance	Temperature range	Reference	Weight kg/lb
Fiber optic module SFP 1000BASE-SX/LC, Multimode	Multimode 50/125 µm Multimode 62.5/125 µm	Standard Level	0.55 km/0.34 mi 0.275 km/0.17 mi	0°C - 60°C	TCSEAAF1LFU00	0.040/ 0.088
Fiber optic module SFP 1000BASE-LX/LC, Single-mode/Multimode	Single-mode 9/125 µm Multimode 50/125 µm Multimode 62.5/125 µm	Standard Level	20 km/12.43 mi 0.55 km/0.34 mi 0.55 km/0.34 mi	0°C - 60°C	TCSEAAF1LFS00	0.040/ 0.088
Fiber optic module SFP 1000BASE-LH/LC, Single-mode	Single-mode 9/125 µm	Standard Level	80 km/49.71 mi	0°C - 60°C	TCSEAAF1LFH00	0.040/ 0.088
Fiber optic module SFP 1000BASE-SX/LC, Multimode	Multimode 50/125 µm Multimode 62.5/125 µm	Entry Level	5 km/3.11 mi 4 km/2.49 mi	0°C - 60°C	MCSEAAF1LFU00	0.040/ 0.088
Fiber optic module SFP 1000BASE-LX/LC, Single-mode	Single mode 9/125 µm	Entry Level	25 km/15.53 mi	0°C - 60°C	MCSEAAF1LFS00	0.040/ 0.088

Name	Use	Port	Reference	Weight kg/lb
Memory Backup Adapter for MCSESM/MCSESP switches	Connected on the front of the switch; used to: - Save and retrieve the switch configuration	USB Type-C	MCSEAM0100	0.050/ 0.110
Memory Backup Adapter for MCSESR switches	- Update the internal software	USB Type-A	TCSEAM0100	0.22/ 0.485

Cables for IP 67 switch

Description	Connectors	Length m/ft	Reference	Weight kg/lb
Straight-through copper cables	1 x IP 67 4-way M12 connector and 1 x RJ45 connector	1/3.28	TCSECL1M3M1S2	—
		3/9.84	TCSECL1M3M3S2	—
		10/32.81	TCSECL1M3M10S2	—
Power supply cables	female M12 straight connectors	2/6.56	XZCP1164L2	—
		5/16.40	XZCP1164L5	—
	female M12 elbowed connectors	2.5/8.20	XZCP1264L2	—
		5/16.40	XZCP1264L5	—
	female M12 straight connectors	—	XZCC12FDM50B	—
	female M12 elbowed connectors	—	XZCC12FCM50B	—



TCSECL1M3M10S2

Approvals and Self-declarations	Unmanaged Switch			Managed Switch						Firewall
	Standard	Premium	IP67	Lite	Basic	Standard	Extended	PoE	Red.	
	MCSESU●	TCSESPU●	TCSESU051●	TCSESL●	TCSESB●	MCSESM●0(H)	MCSESM●1(H)	MCSESP●	MCSESR●	
 CE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
 UL (cULus)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
 RCM	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
 EAC	✓	✓	✓	✓	✓	✓	✓	✓	✓	-
 UKCA	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
 UL121201 / CSA C22.2 No.213	-	✓	-	-	-	✓	✓	✓	-	-
 ATEX	-	-	-	-	-	✓	✓	✓	-	-
 UKEX	-	-	-	-	-	✓	✓	✓	-	-
 DNV	-	✓	-	-	-	✓	✓	✓	-	✓
 LR	-	-	-	-	-	-	✓	-	-	-
 BV	-	-	-	-	-	-	✓	-	-	-
EtherNet/IP	-	-	-	-	-	✓	✓	✓	-	-
 IEC 61850-3	-	-	-	-	-	✓	✓	-	-	-
 IEC 62443-4-2 SL1	-	-	-	-	-	✓	✓	✓	-	-
 CENELEC EN 50121-4	-	-	-	-	-	✓ ⁽¹⁾	✓	✓	-	-

(1) Only applicable for the variants less than or equal to 12 ports.

#		TCSECU300R2	31
490NTC00005	31	TCSECU3M3M1S4	31
490NTW00002	31	TCSECU3M3M2S4	31
490NTW00002U	31	TCSECU3M3M3S4	31
490NTW00005	31	TCSECU3M3M5S4	31
490NTW00005U	31	TCSEFEA23F3F22	30
490NTW00012	31	TCSEFEC23F3F21	30
490NTW00012U	31	TCSEFEC23FCF21	30
490NTW00040	31	TCSEK3MDS	31
490NTW00080	31	TCSEK3MR10	31
M		TCSEK3MR2	31
MCSEAAF1LFS00	32	TCSESB083F23F0	26
MCSEAAF1LFU00	32	TCSESB083F2CU0	26
MCSEAM0100	32	TCSESB093F2CU0	26
MCSESM043F23F0	26	TCSESL043F23F0	26
MCSESM053F1CS0	26	TCSESPU053F1CS0	25
MCSESM053F1CU0	26	TCSESPU053F1CU0	25
MCSESM063F2CS0	26	TCSESPU083FN0	25
MCSESM063F2CU0	26	TCSESPU093F2CS0	25
MCSESM083F23F0	27	TCSESPU093F2CU0	25
MCSESM083F23F0H	27	TCSESU051F0	25
MCSESM083F23F1	28	X	
MCSESM083F23F1H	28	XZCC12FCM50B	32
MCSESM093F1CS0	27	XZCC12FDM50B	32
MCSESM093F1CU0	27	XZCP1164L2	32
MCSESM103F2CS0	27	XZCP1164L5	32
MCSESM103F2CS0H	27	XZCP1264L2	32
MCSESM103F2CS1	28	XZCP1264L5	32
MCSESM103F2CS1H	28		
MCSESM103F2CU0	27		
MCSESM103F2CU0H	27		
MCSESM103F2CU1	28		
MCSESM103F2CU1H	28		
MCSESM123F23G0	27		
MCSESM123F2LG0	27		
MCSESM163F23F0	28		
MCSESM203F4LG0	28		
MCSESM243F4LG0	28		
MCSESP083F23G0	28		
MCSESP083F23G0T	28		
MCSESR043F23F0	29		
MCSESR043F23F0C	29		
MCSESR043F2LM0	29		
MCSESR043F2LM0C	29		
MCSESU053F1CU0	25		
MCSESU053FN0	25		
MCSESU083F2CS0	25		
MCSESU083F2CU0	25		
MCSESU083FN0	25		
T			
TCSEAAF1LFH00	32		
TCSEAAF1LFS00	32		
TCSEAAF1LFU00	32		
TCSEAM0100	32		
TCSECE300R2	31		
TCSECE3M3M10S4	31		
TCSECE3M3M1S4	31		
TCSECE3M3M2S4	31		
TCSECE3M3M3S4	31		
TCSECE3M3M5S4	31		
TCSECL1M3M10S2	32		
TCSECL1M3M1S2	32		
TCSECL1M3M3S2	32		

mySchneider, your personalized digital experience

Access an all-in-one customized online experience and benefit from tailored business services, resources, and tools to efficiently support your business operations.

- **Efficiency:** In just a few clicks, find all the information and support you need to get the job done.
- **Simplicity:** Use a single login to access all business services, in one place, available 24/7. You no longer need to log in to multiple platforms.
- **Personalization:** Benefit from content, tools, and business services tailored to your activity, and customize your landing page based on your preferences.

Watch the How-to Videos



Order management

- > [Select Products and Add to Cart](#)
- > [Check for Products' Price and Availability](#)
- > [Order Products with Generic Commercial References](#)




Product information

- > [Find a Product Data Sheet and Related Documents](#)
- > [Select Products and Add to Cart](#)
- > [Stay Up to Date on the Status of My Products](#)



Support

- > [Get Quicker Answers Thanks to Online Support](#)



Training

- > [Access Trainings Dedicated to My Activity](#)

[Create your account](#)

Life Is On

Schneider
Electric

Legal information

The information provided in this Catalog contains description of Schneider Electric products, solutions and services ("Offer") with technical specifications and technical characteristics of the performance of the corresponding Offer.

The content of this document is subject to revision at any time without notice due to continued progress in methodology, design and manufacturing.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any type of damages arising out of or in connection with (i) informational content of this Catalog not conforming with or exceeding the technical specifications, or (ii) any error contained in this Catalog, or (iii) any use, decision, act or omission made or taken on basis of or in reliance on any information contained or referred to in this Catalog.


SCHNEIDER ELECTRIC MAKES NO WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO WHETHER THIS CATALOG OR ANY INFORMATION CONTAINED THEREIN SUCH AS PRODUCTS AND SERVICES WILL MEET REQUIREMENTS, EXPECTATIONS OR PURPOSE OF ANY PERSON MAKING USE THEREOF.

Schneider Electric brand and any trademarks of Schneider Electric and its subsidiaries referred to in this Catalog are property of Schneider Electric or its subsidiaries. All other brands are trademarks of their respective owners.

This Catalog and its content are protected under applicable copyright laws and provided for informative use only. No part of this Catalog may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Copyright, intellectual, and all other proprietary rights in the content of this Catalog (including but not limited to software, audio, video, text, and photographs) rests with Schneider Electric or its licensors. All rights in such content not expressly granted herein are reserved. No rights of any kind are licensed or assigned or shall otherwise pass to persons accessing this information.

Life Is On



Learn more about our products at www.se.com

Design: Schneider Electric
Photos: Schneider Electric

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier - CS 30323
F-92500 Rueil-Malmaison Cedex
France

DIA6ED2140903EN
January 2025 - V5.0