



**Individual Product Specifications  
for Alkaline Battery**

Model : LR6(XW)  
(size AA)

Panasonic "ALKALINE" Industrial  
(B2SS20110004IS\_03)

Only for OEM

1st/April/2013

| Energy Device Business Division                                                                     |                                                                                                        |                                                                                                        |                                                                                                         |
|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Approved                                                                                            | Quality Assurance                                                                                      | Product Engineering                                                                                    |                                                                                                         |
|                                                                                                     | Confirmed                                                                                              | Checked                                                                                                | Described                                                                                               |
| <br>Tetsuo Nanno | <br>Yoshikazu Inoue | <br>Hirofumi Iwaki | <br>Yasuko Hoshina |

Automotive & Industrial Systems Company  
Panasonic Corporation

|                                                                                                                                                                                                                                                                   |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|-------------------|----------------------------|---------------|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Individual Product Specifications                                                                                                                                                                                                                                 |                        |                   |                            |               | B2SS20110004IS_03                                              |                                                                                                                                      |                       |
| LR6(XW)                                                                                                                                                                                                                                                           |                        |                   |                            |               | Alkaline Battery size (AA)<br>Panasonic "ALKALINE " Industrial |                                                                                                                                      |                       |
| Reference JIS C 8515, IEC 60086-2                                                                                                                                                                                                                                 |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
| 1 Designation : LR6                                                                                                                                                                                                                                               |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
| 2 Nominal Voltage : 1.5 V                                                                                                                                                                                                                                         |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
| 3 Product mass : 23 g                                                                                                                                                                                                                                             |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
| 4 Performance                                                                                                                                                                                                                                                     |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
| 4.1 OCV shall satisfy Table 1 after the test mentioned in 8 (Testing).                                                                                                                                                                                            |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
| 4.2 Minimum Average Duration (MAD) : The MAD shall meet the value mentioned in Table 1 or more, after the test of 8 (Testing).                                                                                                                                    |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
| 4.3 Resistance to leakage shall satisfy Table 1 after the test of 8 (Testing).                                                                                                                                                                                    |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
| Table 1 : Performance                                                                                                                                                                                                                                             |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
|                                                                                                                                                                                                                                                                   |                        | Testing condition |                            |               | Panasonic Corporation AIS Company SPEC <sup>a)</sup>           |                                                                                                                                      |                       |
|                                                                                                                                                                                                                                                                   |                        | Load (Ω)          | Discharging time per day   | End point (V) | Unit                                                           | Initial                                                                                                                              | 20 °C After 12 months |
| OCV <sup>b)</sup>                                                                                                                                                                                                                                                 |                        | —                 | —                          | —             | V                                                              | Max.1.65                                                                                                                             | Max.1.65              |
|                                                                                                                                                                                                                                                                   |                        |                   |                            |               |                                                                | Min. (1.54)                                                                                                                          | Min. (1.53)           |
| Minimum Average Duration (MAD)                                                                                                                                                                                                                                    |                        | 43                | 4hours                     | 0.9           | h                                                              | 76                                                                                                                                   | 70                    |
|                                                                                                                                                                                                                                                                   |                        | 24                | 15sec/min/8h <sup>c)</sup> | 1.0           | h                                                              | 40                                                                                                                                   | 38                    |
|                                                                                                                                                                                                                                                                   |                        | 10                | 1hour                      | 0.9           | h                                                              | 15.5                                                                                                                                 | 14                    |
|                                                                                                                                                                                                                                                                   |                        | 250mA             | 1hour                      | 0.9           | h                                                              | 6.5                                                                                                                                  | 6.2                   |
|                                                                                                                                                                                                                                                                   |                        | 3.9               | 1hour                      | 0.8           | h                                                              | 6.3                                                                                                                                  | 5.6                   |
|                                                                                                                                                                                                                                                                   |                        | 1000mA            | 10sec/min/1h <sup>d)</sup> | 0.9           | pulses                                                         | 350                                                                                                                                  | 290                   |
| Resistance to Leakage                                                                                                                                                                                                                                             | Over discharge         | Cf. Table 2       |                            |               |                                                                | There shall be neither evidence of electrolyte leakage on the surface of any battery nor deformation beyond the specified dimension. |                       |
|                                                                                                                                                                                                                                                                   | Under High temperature | Cf. Table 2       |                            |               |                                                                | There shall be neither evidence of electrolyte leakage on the surface of any battery nor deformation beyond the specified dimension. |                       |
| Note a) Expiration date is indicated to the drawing of artistic designs.<br>The value with parenthesis is informative.                                                                                                                                            |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
| b) "Max." and "Min." in column of OCV mean maximum and minimum values.<br>The value with parenthesis is informative.                                                                                                                                              |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
| c) The specified load shall be applied across the battery for 15 seconds on, 45 seconds off per minute.<br>It is repeated for 8 hours per day.                                                                                                                    |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
| d) The specified current drain shall be applied across the battery for 10 seconds on, 50 seconds off per minute.<br>It is repeated for 1 hour per day.<br>It can be added to the cumulative discharging frequency when the discharge for 10 seconds is completed. |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
| 5 Dimensions: As per attached Figure 1.                                                                                                                                                                                                                           |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
| 6 Terminals: As per attached Figure 1. (+) Cap, (–) Base<br>There shall be no rust or deformation, which will cause hindrance on use.                                                                                                                             |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |
| 7 Appearance: There shall be no stain, scratch and deformation which will cause hindrance on use.<br>The marking on surface shall be clear.                                                                                                                       |                        |                   |                            |               |                                                                |                                                                                                                                      |                       |

|                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Individual Product Specifications                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | B2SS20110004IS_03                                              |
| LR6(XW)                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Alkaline Battery size (AA)<br>Panasonic ”ALKALINE ” Industrial |
| 8     Testing                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |
| 8.1     Storage and testing condition : If not specified, the temperature is 20 ± 2 °C and the relative humidity shall be (60 ± 15) %. However, during 3 months that it is short period only, it may be 20 ± 5 °C. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |
| 8.2     Testing method     :     Refer to Table 2                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |
| Table 2     :     Testing method                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |
| Open circuit voltage                                                                                                                                                                                               | After more than 8 hours storage under the condition specified in 8.1, measure with a voltmeter mentioned below at the same condition. The accuracy of the measuring equipment shall be ≤ 0.25% and the precision shall be ≤ 50% of the value of the last significant digit. The internal resistance of the measuring instrument shall be ≥ 1MΩ.                                                                                                                        |                                                                |
| Service life                                                                                                                                                                                                       | Battery shall be discharged as specified condition until the voltage on load drops for the first time below the specified end point. (service life under the intermittent discharge should be accumulated the time on load)<br>a)     Commencement : After more than 8 hours storage under the condition specified in 8.1.<br>b)     Discharging method : Based on Table 1<br>c)     Calculation of average service life : Test 9 batteries and calculate the average. |                                                                |
| Resistance to leakage at over discharge                                                                                                                                                                            | After usual discharging test, the discharge is continued until voltage of battery drops to 0.6 V for the first time.                                                                                                                                                                                                                                                                                                                                                   |                                                                |
| Resistance to leakage at high temperature                                                                                                                                                                          | The test battery should be stored for 30 days under the temperature at 45 ± 2 °C and relative humidity below 70 %(RH).                                                                                                                                                                                                                                                                                                                                                 |                                                                |
| Dimensions                                                                                                                                                                                                         | Dimensions shall be measured by the vernier caliper specified in JIS B 7507 having below 200 mm of measuring capability and minimum division 0.05 mm.                                                                                                                                                                                                                                                                                                                  |                                                                |
| Terminal                                                                                                                                                                                                           | Visual Observation                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                |
| Appearance                                                                                                                                                                                                         | Visual Observation                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                |
| 9            Marking                            Specified as the drawing of designs.                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |
| 10          Manufacturer                Panasonic Energy (Thailand) Co., Ltd.    [Abbreviated name: PECTH]                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |
|                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |
|                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |
|                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |
|                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |
|                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |
|                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |
| Stipulation                                                                                                                                                                                                        | 25/January/2011                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Newly produced.                                                |
| Revision                                                                                                                                                                                                           | 1/January/2012                                                                                                                                                                                                                                                                                                                                                                                                                                                         | For change of name of Business Unit and document format.       |
| Revision                                                                                                                                                                                                           | 1/ April/2013                                                                                                                                                                                                                                                                                                                                                                                                                                                          | For change of name of Company.                                 |
|                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |
|                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |
|                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                |

# Individual Product Specifications

B2SS20110004IS\_03

LR6(XW)

Alkaline Battery size (AA)

Panasonic "ALKALINE" Industrial

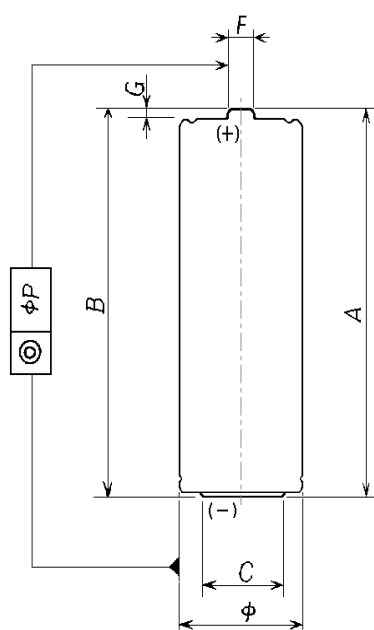


Figure 1 LR6

Unit : mm

|     | JIS C 8515 |        |
|-----|------------|--------|
|     | Max.       | Min.   |
| A   | 50.5       | (49.2) |
| B   | —          | 49.2   |
| C   | —          | 7.0    |
| D   | (4.0)      | —      |
| E   | 0.5        | 0      |
| F   | 5.5        | (4.2)  |
| G   | —          | 1.0    |
| ϕ   | 14.5       | 13.5   |
| ϕP  | 0.5        | —      |
| Pip | 0.4        | —      |

Note 1 Numerical value with parentheses: informative

Note 2 The symbols of dimensions are as following.

A : Overall height

B : Distance between (+) and (-) terminals, excluding pip.

C : Outer diameter of (-) flat contact surface

D : Diameter of concave part of central (-) terminal. (This model doesn't have this part on the surface of (-) terminal.)

E : Recess of (-) flat contact surface from outside cover. (E of this model is zero. Because this model has the projected (-) contact.)


F : Diameter of the specified projection of (+) terminal.

G : Projected height of (+) contact, excluding pip.

ϕ : Diameter of the battery.

ϕP : Concentricity of the positive contact

Pip : Height of pip. (This model doesn't have pip.)

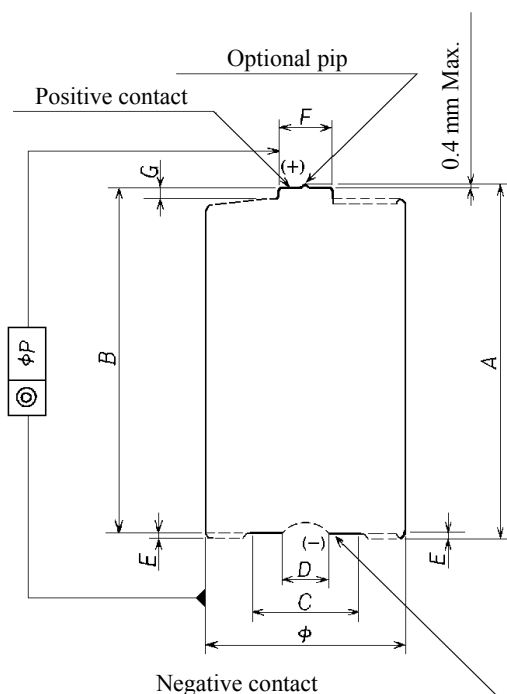

Reference drawing : JIS C 8515 : 2007

Note 3 The cylindrical surface is insulated from the contacts.

Note 4 The negative contact "C" may be flat over the whole area.

Note 5 The profile over the dotted line sections is not specified.