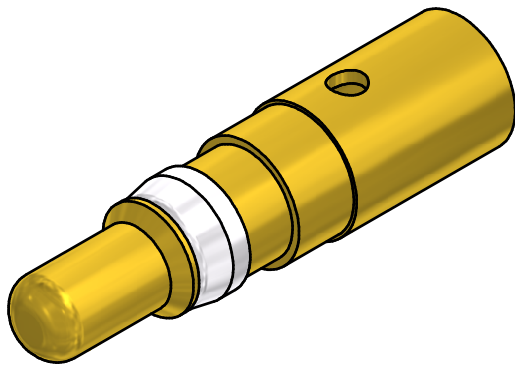
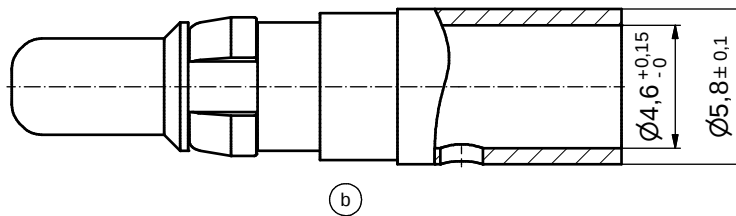
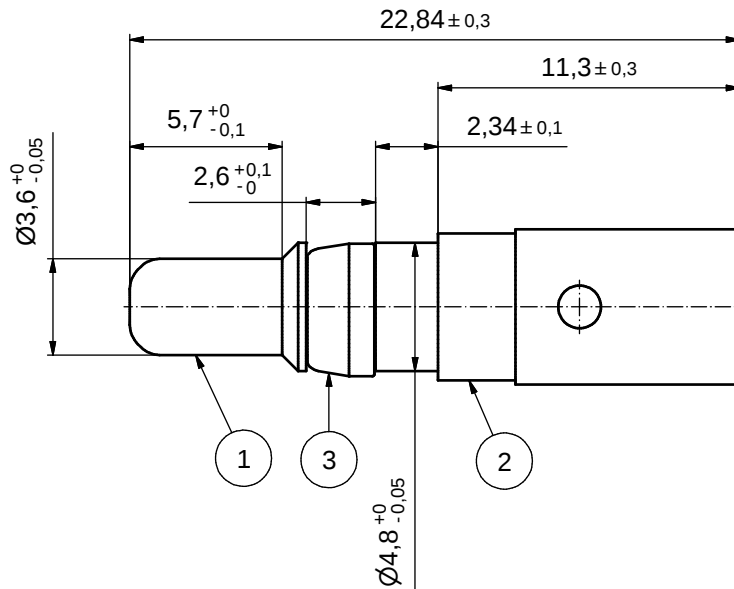


STRIPPING DIMENSIONS

NOTES:

1. MATERIAL: COPPER ALLOY

2. PLATING:

ITEM 1: SEE TABLE

ITEM 2: GOLD FLASH over NICKEL

ITEM 3: NICKEL PLATED

3. CRIMPING: USE CRIMP TOOL 360X10409X

WITH TOOL INSERT 360X20029X

SELECTOR SETTINGS: 7 FOR AWG 8

6 FOR AWG 10

(c) 4. CURRENT RATING: PER UL 1977 / CSA - C22.2 No.182.3 (E228329)
-40A

-50A only when used with cable AWG 8 and in combination with

2W2C connectors per following part number system:

Cat. No. 302W2, 302W2 followed by C, followed by P or S,

followed by XX, followed by 99, followed by A1 through A8, C1 through C6,

D1 through D6, E1 through E6, F1 through F6, G1 through G4,

H1 through H4, K1 through K4, L1 through L4, N1 through N4 or

P1 through P4, W1, W2 or S9, followed by 0X or 0A to 0W

when used in conjunction with the following contacts and

pins 131A, 132A, 131C, 132C, 131J and 132J followed by 11049X

(b)

PLATING ITEM 1	PART-NO.
GOLD FLASH over NICKEL	131A11049X
min. 30µin HARD GOLD over min. 50µin NICKEL	131C11049X
min. 50µin HARD GOLD over min. 50µin NICKEL	131J11049X

(b)

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND				finish:	SEE NOTES	tolerance	ISO 2768-m	dim. in mm	scale:	5:1
					date	name	drawn	23.03.98	Barcinski	material:	SEE NOTES
					date	name	appd.	23.03.98	Mickenbecker	title: HIGH POWER CONTACT MALE CRIMP VERSION AWG 8-10 D-SUB COMBINATION (c)	
					norm						
					2 x c	Ä4283	17.04.12	K.H.	d-old		
					4 x b	A3854	19.01.11	K.H.		dwg no:	DIN-A3
				a	Origin					sh: 1	
				rev.	description	date	name	CONEC®		part no:	SEE TABLE

Directive 2002/95/EC RoHS compliant