

Manual for N_eye (iPhone)

Contents

1. Introduction	3
1.1 Function introduction	3
1.2 Runtime environment	3
2. Installation	3
3. Operation	4
3.1 Home interface	4
3.2 Device management	5
3.2.1 Device list	5
3.2.2 Add device	6
3.2.3 Edit/Delete Device	8
3.3 Live view	9
3.3.1 PTZ control	10
3.3.2 Panel button description	11
3.4 Snapshot and Record files	12
3.5 Remote Record file Search and playback	14
3.6 Setting	16

1. Introduction

1.1 Function introduction

N_eye is your best mobile surveillance system for iPhone. With your sensitive finger tips you can control camera zoom or PTZ, 4 Channel live camera videos help you grasp important scenes with ease. N_eye is convenient features unleash the power of your DVRs and IP cameras. It has the following features include:

- 1) Support both Wi-Fi, 3G and 4G wireless network connection
- 2) Device management
- 3) Support QR Code scanning and LAN searching to add device
- 4) Live video support 1, 4 channels display on one screen
- 5) Full screen play and support both landscape and portrait mode
- 6) PTZ using finger touch, image multiplication using two fingers
- 7) Snapshot and playback;
- 8) Video record and playback
- 9) Support two-way voice
- 10) Support remote video playback
- 11) Support remote alarm functions

1.2 Runtime environment


Operating system: ios

Version: ios 5.0 or above


Applicable equipment: iPhone

The network environment: Wi-Fi, 3G, 4G

2. Installation

Search Keyword “N_eye” in your “App Store”, then you will get the installation package of this application. Tap “” to install.

After the installation is complete, the name of “N_eye” icon will show on your iPhone’s desktop, as below:

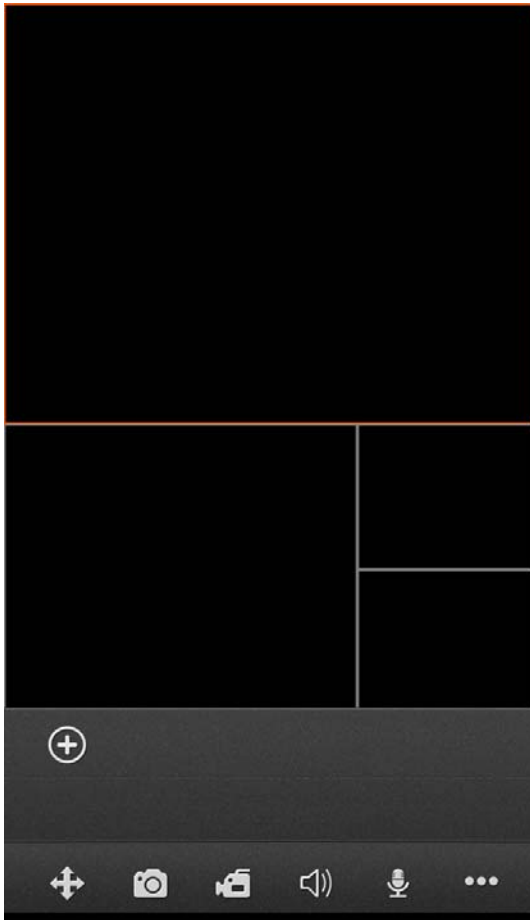

P1



P2

3. Operation

3.1 Home interface



Tap N_eye's icon to run the program, after the initial screen, you will be brought to the home interface, as below:




P3 home interface

3.2 Device management



3.2.1 Device list

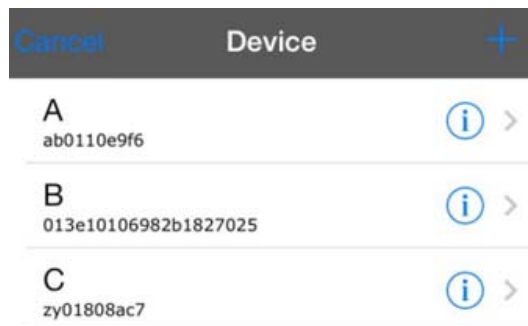
Tap “” button to spread out all the function buttons, then tap “” button, the device list view will appear.



P4

3.2.2 Add device

Tap “” button in the home interface view or “” button in the device list view, to open the device adding view.

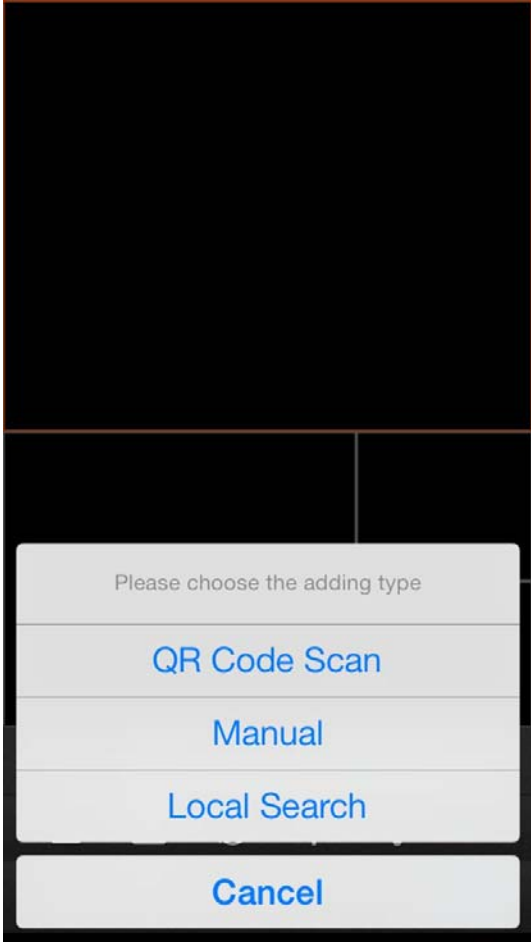

P5

Here provides 3 methods to add devices:

Button	Descriptions
QR Code Scan	Scan the QR code on your device to fill in the GID string,
Manual	Fill in the info manually
Local Search	If the device is on the same local network with your phone, GooLink would find them and let you add those devices easily

Cancel testB Done

Name: testB

GID: zy01602d07

User: admin

Password: ••••••


Channel Number

1 4 8 16 32 auto

P6 Manual way


Entry	Descriptions
Name	Any characters that you like to identify this device. Please be noted that the name should not duplicate with existing device's name.
GID	The device GID (if you are using the QR Code Scan/ Local Search method to add device, this item will be fill automatically)
User	The device's login name
Password	The device's login password
Channel Number	Select the channel number, when assign "auto", the app will set the number automatically.


When you finish adding devices, they will show in the home interface view under the playing windows area. If the device icon's color is bright-Blue, it means the device is online.

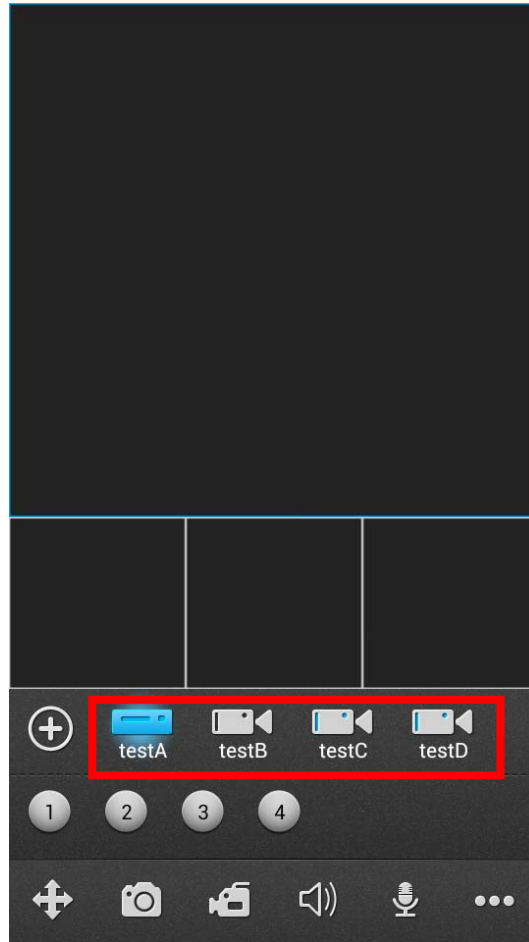


P7

3.2.3 Edit/Delete Device

Tap “ >” button in the Device list (see P4) to Edit/Delete a device, and you will see the page like Picture-8 as below. Here you can change the information and tap “Done” to save, or tap “Cancel” to return to the device list without changing.

If you want to delete the device, just tap the red button “”.

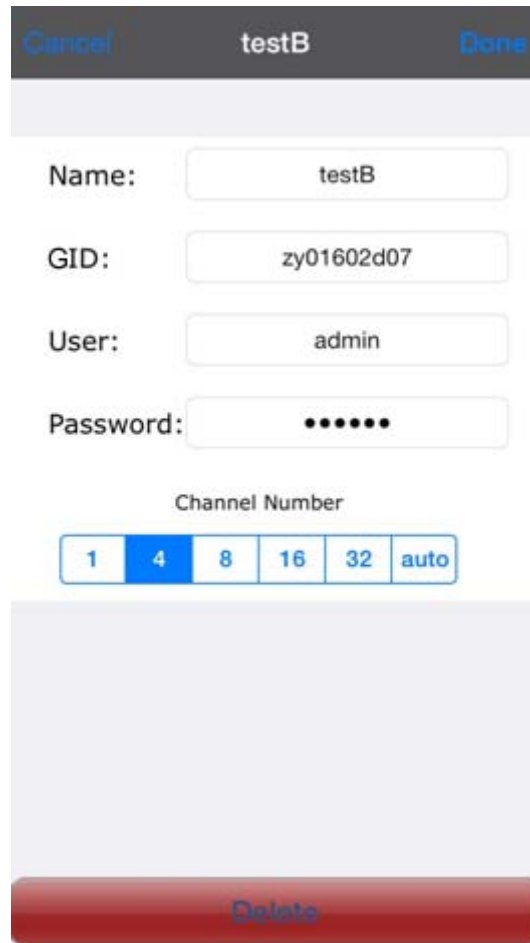


P8


3.3 Live view

Step one: Tap the device icon which you want, N_eye will check out the channels of this device, and show the channel icons under the device area.


Step two: Tap the channel icon which you want, then the channel's video will be connected.

Repeat above steps to connect to other channels of the device or another device.

When the channel selected, the channel circle icon's color will turn into bright-Blue like . Tap the bright-Blue icon, the channel video will stop and the channel circle icon color becomes grey.

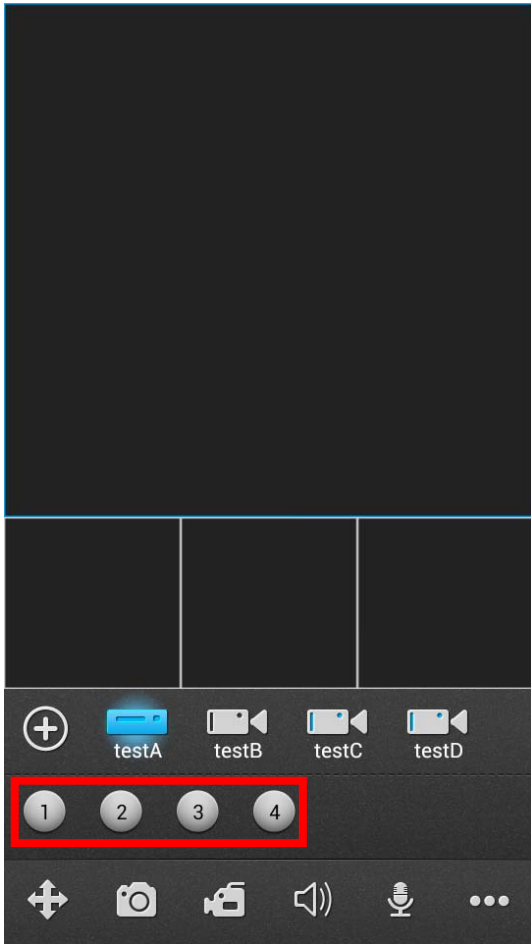

P9

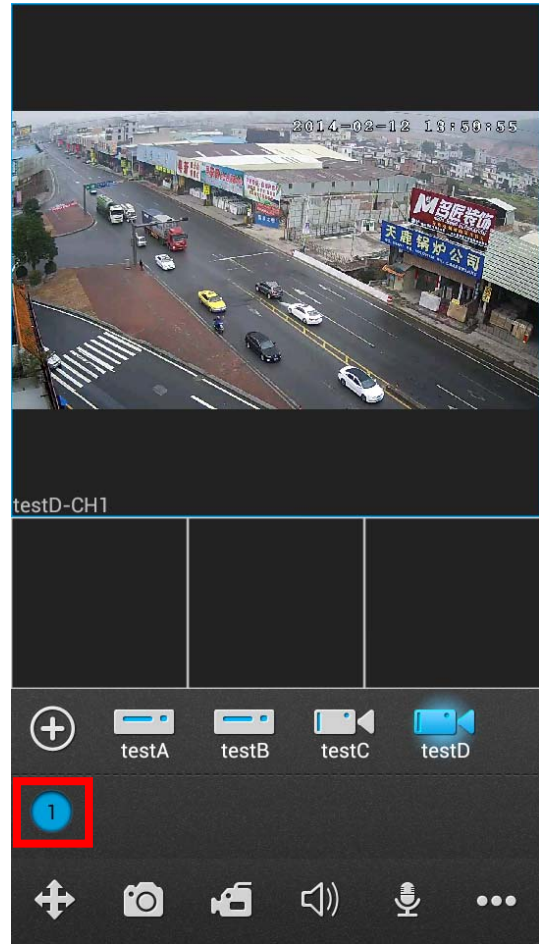


P10

Tips: You can tap and drag the window to swap any two displaying videos.

P11 landscape mode

3.3.1 PTZ control

1) finger-touching over the displaying video

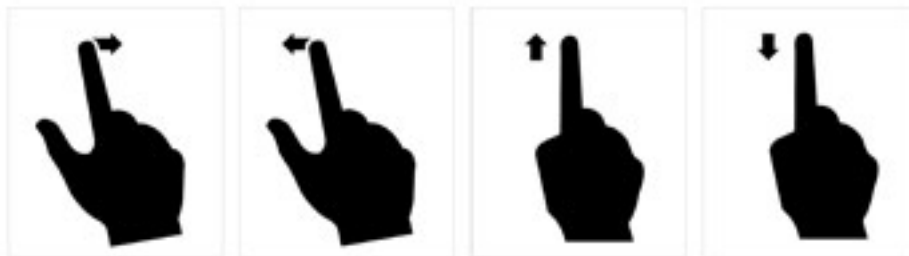


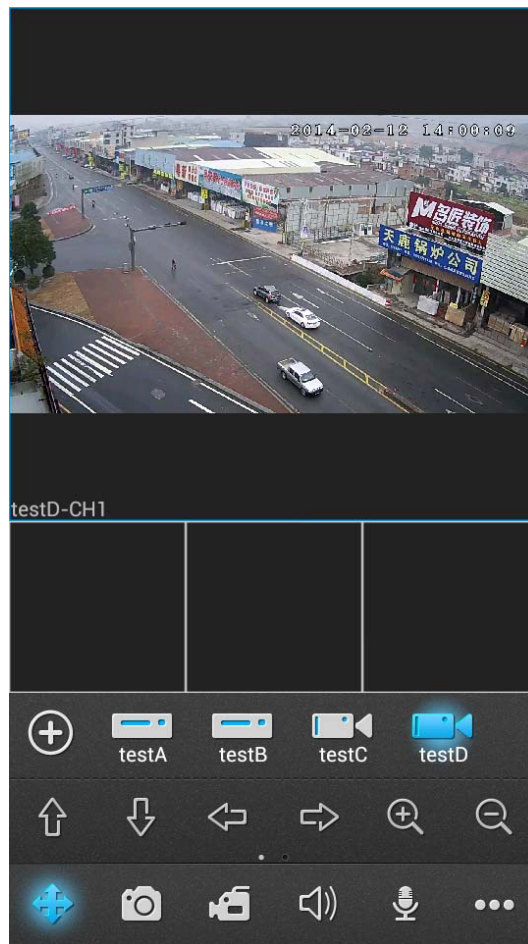
P12 direction rotation



P13 image multiplication


2) Tapping the PTZ control buttons






















Tap  to open the PTZ Control panel. Slide to show more PTZ control button; To hide the panel, you can tap the button again.




P14 PTZ Control panel

3.3.2 Panel button description


The button icon	Function keys
	Add a new device

		PTZ:UP
		PTZ:Down
		PTZ:Right
		PTZ:Left
		Zoom In
		Zoom Out
		Focus Add
		Focus Minus
		Iris Add
		Iris Minus
		Snapshot
		Start/Stop Record
		Audio
		Talkback
		Device List
		Snapshot and Record files
		Remote Record file Search and playback
		Local Settings
		User gGIDe

3.4 Snapshot and Record files

Tap “” to visit the Snapshots & Records view, you can playback or delete the files



from this view.

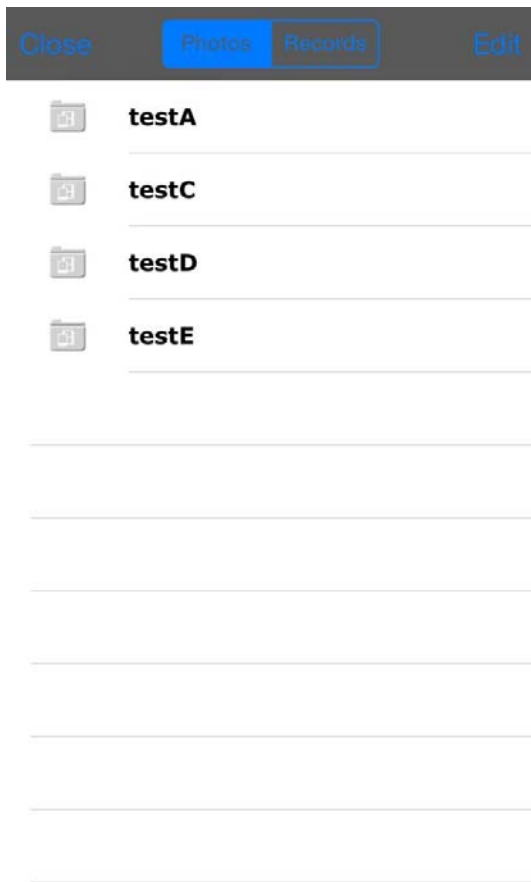

P15



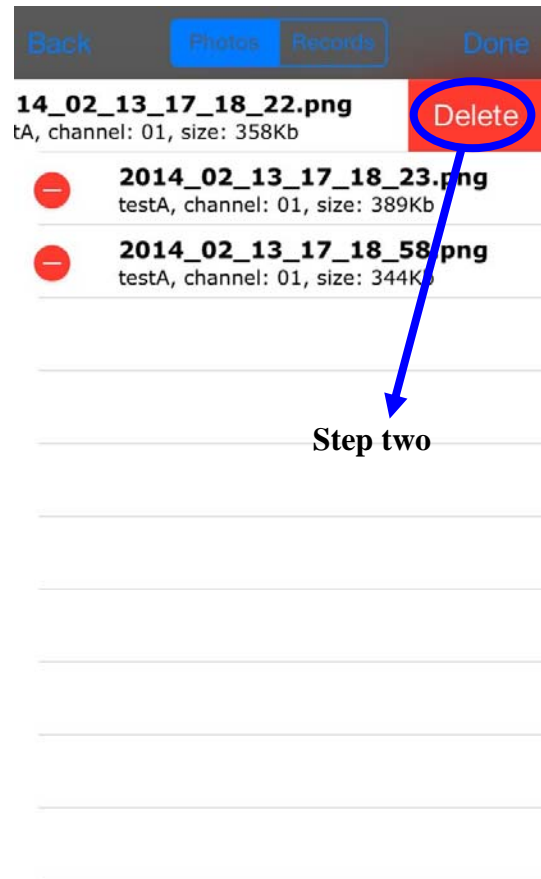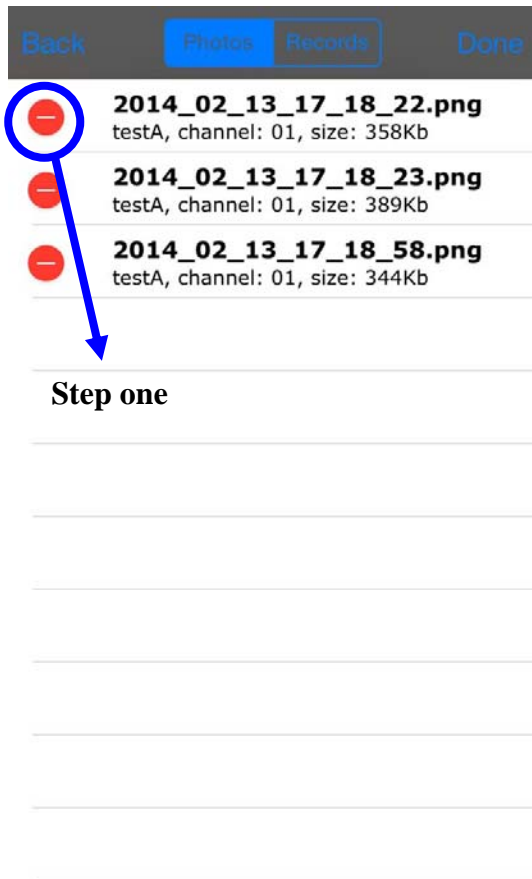


P16




P17 delete file

3.5 Remote Record file Search and playback

Tap "🕒", then click any device on "Device" page to open the device's "Remote Record Search" view. Before performing a search, user can customize the search conditions like "Channels, StartTime, EndTime, VideoType", as below:

Cancel		Device
testA	ak016186e8	 >
testB	zy01602d07	 >
testC	ak013a71c7	 >


Cancel Remote Record Search		
Channels	All	
StartTime	2014-06-11-00-00-00	
EndTime	2014-06-11-23-59-59	
Switch alarm Record	<input checked="" type="checkbox"/>	
Motion detection recording	<input checked="" type="checkbox"/>	
Conventional Record	<input checked="" type="checkbox"/>	
Manual recording	<input checked="" type="checkbox"/>	
All Record	<input checked="" type="checkbox"/>	


P18



P19



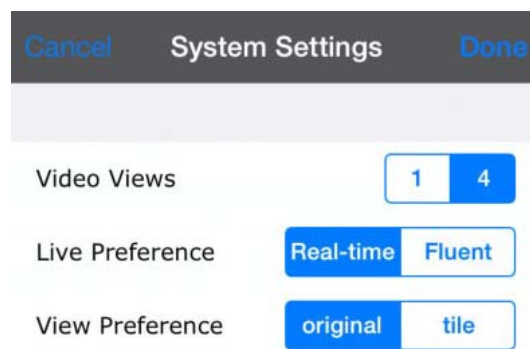


3.6 Setting

Tap “” to open the “System Settings” view:



P20

Video Views	<input checked="" type="radio"/> 1 <input type="radio"/> 4	One window display in the Live view
--------------------	--	-------------------------------------

		Four windows display in the Live view
Live Preference		No buffering, which means there is minimum delay of the video display and video fluency may be suffered;
		Buffering enabled, the video will be more fluent in this mode;
Mode Preference		Watching video and saw the size of the picture is directly by the devices to get the size of the screen,
		Watching video and saw the size of the picture is from the equipment drawing show the effect of the picture,