


# Lötstifte Picots pour C.I. Soldering lugs for PCB






Werkstoff/Matière/Material  
.2 = Bronze/bronze  
.6 = Messing/laiton/brass

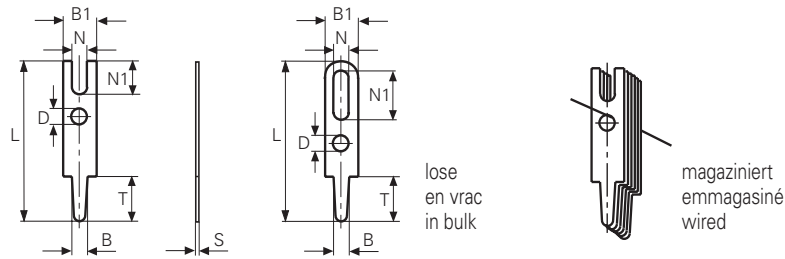





■ = Oberflächen/Surface/Surface-plating  
Seite/page/page 5.011



Federschlagwerkzeug / Appareil à percuter / Hand tool No. 1035

## für Bohrung / pour trou / for hole < 1.3mm

					
<b>Artikelnummer Numéro d'article Part-No.</b>	<b>1000k.2</b>	<b>1001l.6</b>	<b>01001l.6</b>	<b>1001p.6</b>	<b>01001p.6</b>
<b>Bohrung/Trou/Hole</b>	∅ 0.65	∅ 0.75	∅ 0.75	∅ 0.75	∅ 0.75
<b>T</b>	3.5	1.5	1.5	1.5	1.5
<b>L</b>	7.5	6.5	6.5	8	8
<b>B1</b>	1.6	1.8	1.8	1.8	1.8
<b>N</b>	1	0.8	0.8	0.8	0.8
<b>N1</b>	1.2	1.2	1.2	1.2	1.2
<b>∅D</b>		0.8	0.8	0.8	0.8
<b>B</b>	0.7	0.75	0.75	0.75	0.75
<b>S</b>	0.4	0.4	0.4	0.4	0.4
<b>Werkzeuge Outils Toolings</b>	<b>2</b>	<b>56</b>	<b>1042q</b>	<b>56</b>	<b>1042p</b>

						
<b>Artikelnummer Numéro d'article Part-No.</b>	<b>1001q.6</b>	<b>01001q.6</b>	<b>1001y.6</b>	<b>01001y.6</b>	<b>1001.2</b>	<b>1001m.2</b>
<b>Bohrung/Trou/Hole</b>	∅ 0.75	∅ 0.75	∅ 0.75	∅ 0.75	∅ 0.75	∅ 0.8
<b>T</b>	2.5	2.5	2.5	2.5	3.5	5.5
<b>L</b>	7.5	7.5	7.5	7.5	7.5	9.3
<b>B1</b>	1.8	1.8	1.8	1.8	1.6	1.6
<b>N</b>	0.8	0.8	0.8	0.8	1	1
<b>N1</b>	1.2	1.2	1.2	1.2	1.2	0.8
<b>∅D</b>	0.9	0.9	0.9	0.9		
<b>B</b>	0.8	0.8	0.8	0.8	0.8	0.8
<b>S</b>	0.4	0.4	0.5	0.5	0.4	0.4
<b>Werkzeuge Outils Toolings</b>	<b>56</b>	<b>1042q</b>	<b>56</b>	<b>1040y</b>	<b>2</b>	<b>2</b>