


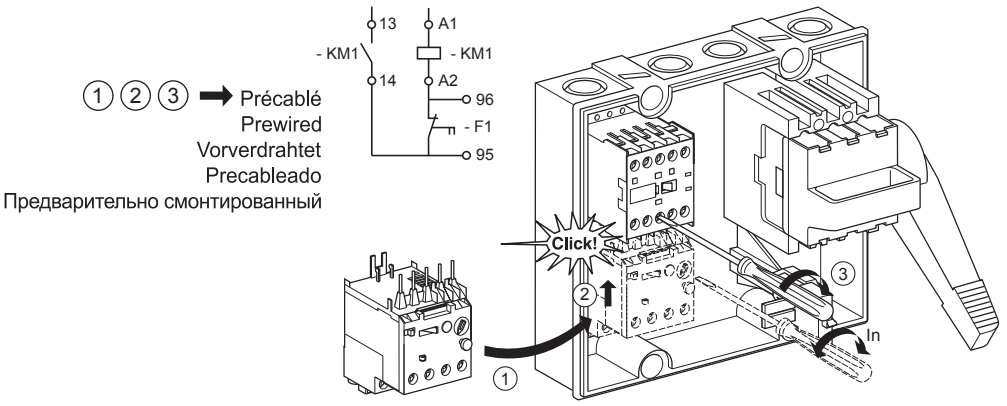
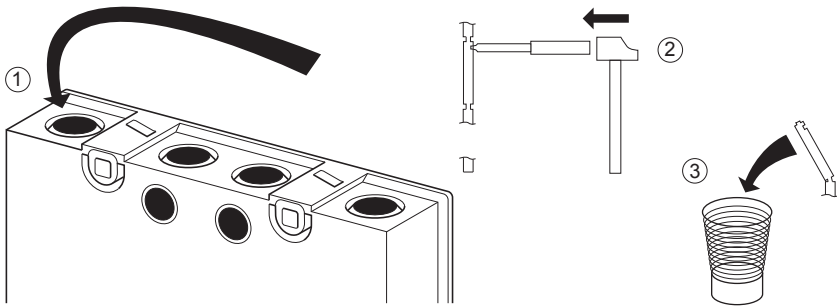




Raccordement mini ... maxi
 Wiring min ... max
 Anschlüsse min ... max
 Capacidad de conexión min ... max
 Проводка мин...макс

Philips N° 2						Ø 6 max					
[mm ²]	[mm ²]	[mm ²]	[mm ²]	[mm ²]	[mm ²]	[mm ²]	[mm]	C	L	Ø	
[mm ²]	[mm ²]	[mm ²]	[mm ²]	[mm ²]	[mm ²]	[mm ²]	[mm]	[N.m]	[mm]	[mm]	
1 x 6,35 2 x 2,8	0,34 : 2,5	0,34...2,5 + 0,34...1,5	0,75 : 4	0,75...4 + 0,75...4	1,5 : 4	1,5...4 + 1,5...4	7	0,8	7	3	





kW (400 V)	In (A)					3 x 	aM	gl
					A		A	A
0,37	1	LE4-K06	LR2-K0306		0,8...1,2		2	4
0,55	1,5	LE4-K06	LR2-K0307		1,2...1,8		2	4
0,75	1,9	LE4-K06	LR2-K0308		1,8...2,6		4	6
1,1	2,5	LE4-K06	LR2-K0308		1,8...2,6		4	8
1,5	3,4	LE4-K06	LR2-K0310		2,6...3,7		4	10
2,2	4,8	LE4-K06	LR2-K0312		3,7...5,5		6	12
3	6,3	LE4-K09	LR2-K0314		5,5...8		8	16
4	8,1	LE4-K09	LR2-K0316		8...11,5		10	20
Autres		LE4-K06	LR2-K0301		0,11...0,16		0,25	0,5
Other		LE4-K06	LR2-K0302		0,16...0,23		0,25	0,5
Anders		LE4-K06	LR2-K0303		0,23...0,36		0,5	1
Otros		LE4-K06	LR2-K0304		0,36...0,54		1	1,6
Другое		LE4-K06	LR2-K0305		0,54...0,8		1	2

Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323

F - 92506 Rueil Malmaison Cedex

© 2015 Schneider Electric - All rights reserved.

Уполномоченный поставщик в РФ:

АО «Шнейдер Электрик»

Адрес: 127018, г. Москва, ул.
Двинцев, д.12, корп.1, тел. +7 (495)777 99 88,
факс: +7 (495)777 99 94, 8-800-200-6446

www.schneider-electric.ru

