TO-220 Power Resistor—TR50-H



Features

- -50 watts at \leq 25°C case temperature heat sink mounted
- -TO-220 style power package
- -Fixed with a M3 screw on system heat sink.
- Improve the heat dissipation by ceramic exposure design with external fix jig to mount the chip on heat sink

Applications


- -Power Supplies
- Non-inductive Design for High Frequency
- -Pulsing Applications

■Electrical Characteristics Specifications


Resistance	TCR (PPM/°C)			
Range	±0.5% ±1%		±5%	±10%
0.1Ω - 1Ω				_
>1Ω - 3Ω		±300	±300	±300
>3Ω - 10Ω		±100 ±200	±100 ±200	±100 ±200
>10Ω - 10ΚΩ	±50 ±100 ±200	±50 ±100 ±200	±50 ±100 ±200	±50 ±100 ±200

- Operating Voltage: 420V Max.
- Dielectric Strength: 1800VAC
- Insulation Resistance: 10GΩ min.

Derating Curve

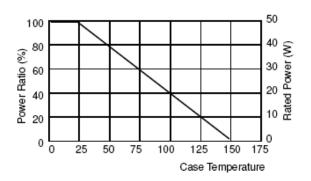

Construction

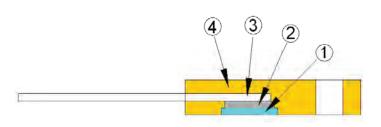


1	Alumina Substrate	3	Lead
② Resistor Layer		4	Molding

Dimensions


Unit: mm

Туре	Weight (g) (1000pcs)	
TR50-H	2770	

Unit: mm

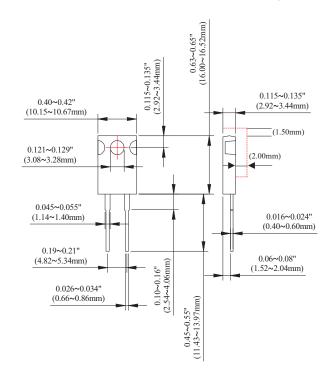

Part Numbering

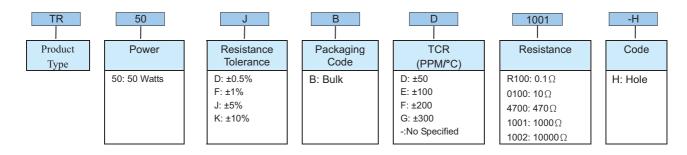

Environmental Characteristics

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	Referenced to 25°C, ∆R taken at +105°C
Short Time Overload	ΔR±0.3%	2 times rated power with applied voltage not to exceed 1.5 times maximum continuous operating voltage for 5 seconds
Load Life	ΔR±1.0%	2,000 hours at rated power
Damp Heat with Load	ΔR±0.5%	$40\pm2^{\circ}\text{C}$, 90~95% R.H. Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Solderability	90% min. coverage	245±5°C for 3 seconds
Thermal Shock	ΔR±0.3%	-65°C ~150°C, 100 cycles
Terminal Strength	ΔR±0.2%	(Pull Test) 2.4N
Vibration, High Frequency	ΔR±0.2%	20g peak

- Lead Material: Tinned Copper
- Maximum Torque: 0.9 N-m
- Without a Heat Sink, When in Free Air at 25°C, the TR50-H is Rated for 2.25W.
- The Case Temperature is to be used for the Definition of the Applied Power Limit.
- The Case Temperature Measurement must be made with a Thermocouple Contacting the Center of the Component mounted on the Designed Heat Sink.
- Thermal Grease should be Applied Properly.