

Electronic housing - ME 22,5 UT/FE BUS/ 5 GN - 2908744

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Housing base, 5-position integrated cross connector for parallel through contacting

Product Features

- 2 optional serial contacts (daisy chain)
- Gold contacts for data transmission and power supply (125 V, 8 A)
- Supply via standard MINI COMBICON plug
- Can be snapped onto standard NS 35/7,5 and NS 35/15 DIN rails

Key commercial data

package_quantity	10
GTIN	4017918160647

Technical data

General

Housing type	Component housing
Housing material	Polyamide
Color	green

Ambient conditions

Ambient temperature (operation)	-40 °C ... 105 °C
--	-------------------

Dimensions

Length	99 mm
Constructional height	114.5 mm
Width	22.5 mm

Technical data

Connection in acc. with standard	CUL
Nominal voltage U_N	300 V
Nominal current I_N	8 A
Indicator1	CUL1
Inflammability class according to UL 94	V0
Power dissipation at 20°C in the horizontal mounting position	6.1 W 12.1 W
Number of positions	16
Number of positions	24

Electronic housing - ME 22,5 UT/FE BUS/ 5 GN - 2908744

Technical data

classifications

eCl@ss

eCl@ss 4.0	27180401
eCl@ss 4.1	27180401
eCl@ss 5.0	27180506
eCl@ss 5.1	27180506
eCl@ss 6.0	27180802
eCl@ss 7.0	27182702
eCl@ss 8.0	27182702

ETIM

ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 5.0	EC001031

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

approvals

UL Recognized / cUL Recognized / cULus Recognized /

Approval details



cUL Recognized		
Usegroups	B	D
Nominal voltage UN	300 V	300 V
Nominal current IN	8 A	8 A
mm ² /AWG/kcmil		

Electronic housing - ME 22,5 UT/FE BUS/ 5 GN - 2908744

approvals

cULus Recognized  US

accessories

Coding element

CR-MSTB - 1734401



CP-MSTB - 1734634



Mounting material

ME-SAS - 2853899



ME DH27 NS 35 - 2908760



Electronic housing - ME 22,5 UT/FE BUS/ 5 GN - 2908744

accessories

ME DH36 NS 35 - 2909895



ME LPZS - 2906911



Filler plug

ME B-KA - 2854173



ME B-22,5 MKDSO GN - 2907143



ME B-22,5 MSTBO GN - 2907156



Electronic housing - ME 22,5 UT/FE BUS/ 5 GN - 2908744

accessories

ME B-SA/NS 35 - 2935959



ME B-12,5 3MSTBO GN - 2709176



ME B-22,5 MKDSO GN - 2907143



ME B-22,5 MSTBO GN - 2907156



ME B-SA/NS 35 - 2935959



ME B-KA - 2854173




Electronic housing - ME 22,5 UT/FE BUS/ 5 GN - 2908744

accessories

Drawings


Dimensioned drawing

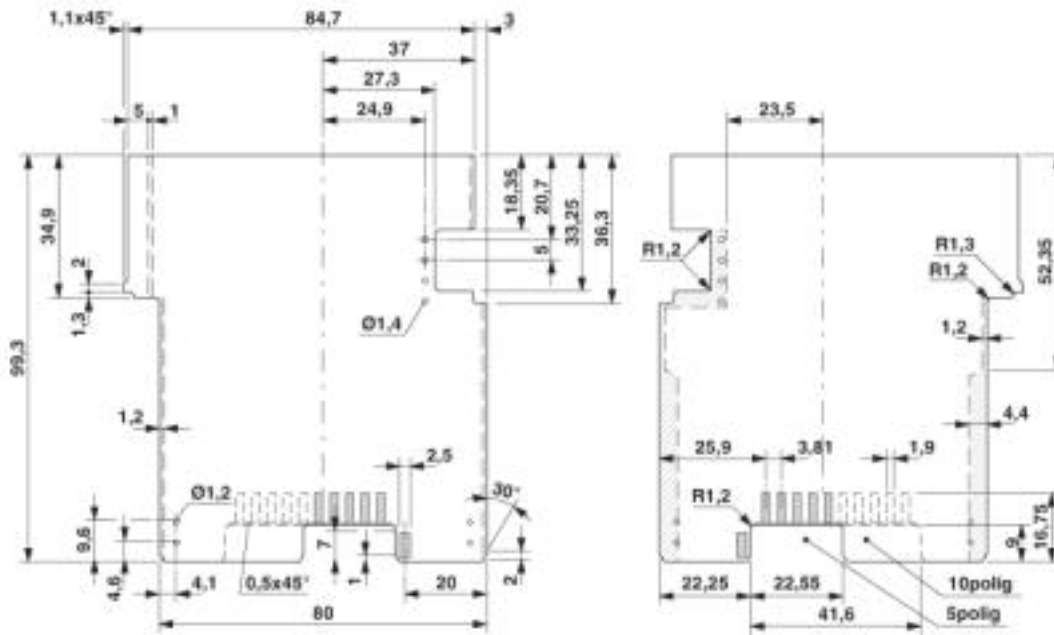

Dimensional drawing of the ME.../BUS5 and ME.../BUS10 printed circuit board if the single-level upper part is used

Electronic housing - ME 22,5 UT/FE BUS/ 5 GN - 2908744


Dimensioned drawing

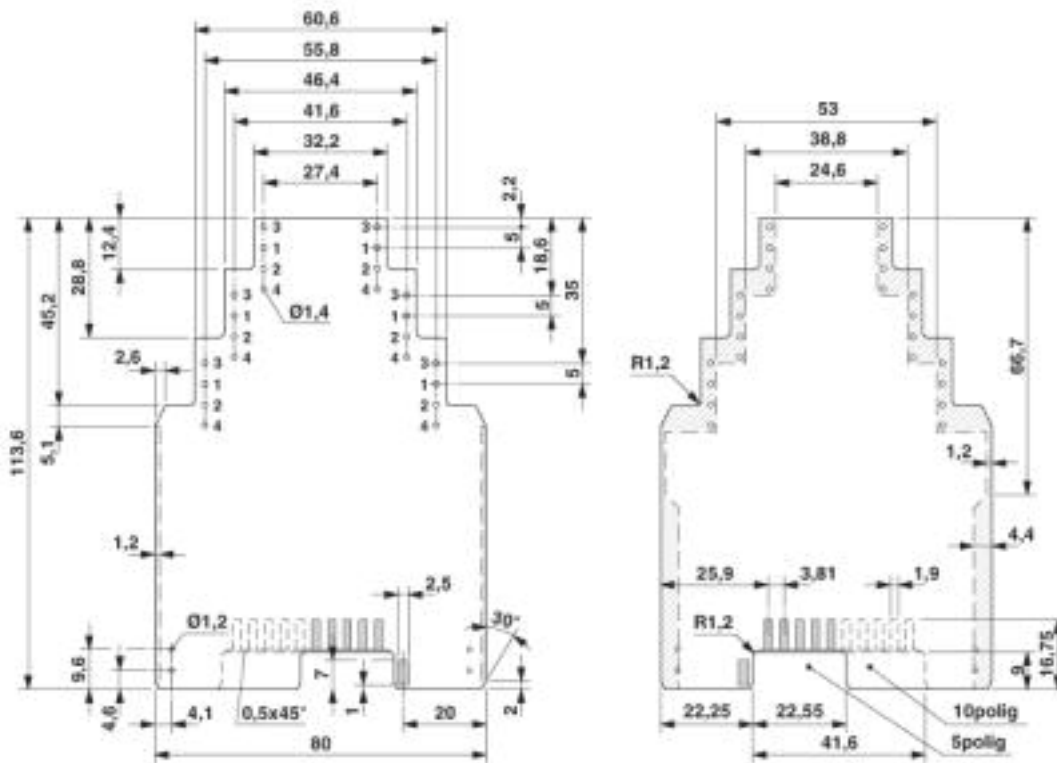

Dimensional drawing of the ME.../BUS5 and ME.../BUS10 printed circuit board if the triple-level upper part is used

Electronic housing - ME 22,5 UT/FE BUS/ 5 GN - 2908744


Dimensioned drawing

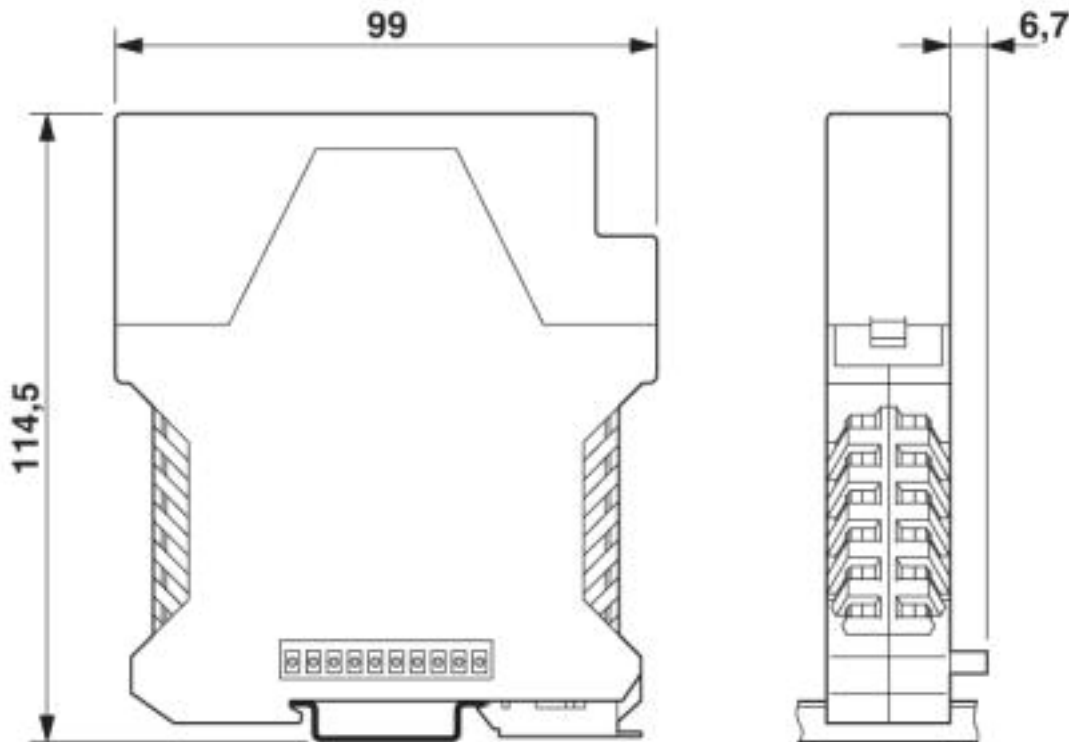

Dimensions of the electronics housing ME.../BUS5 and ME.../BUS10 with single-level upper part

Electronic housing - ME 22,5 UT/FE BUS/ 5 GN - 2908744


Dimensioned drawing

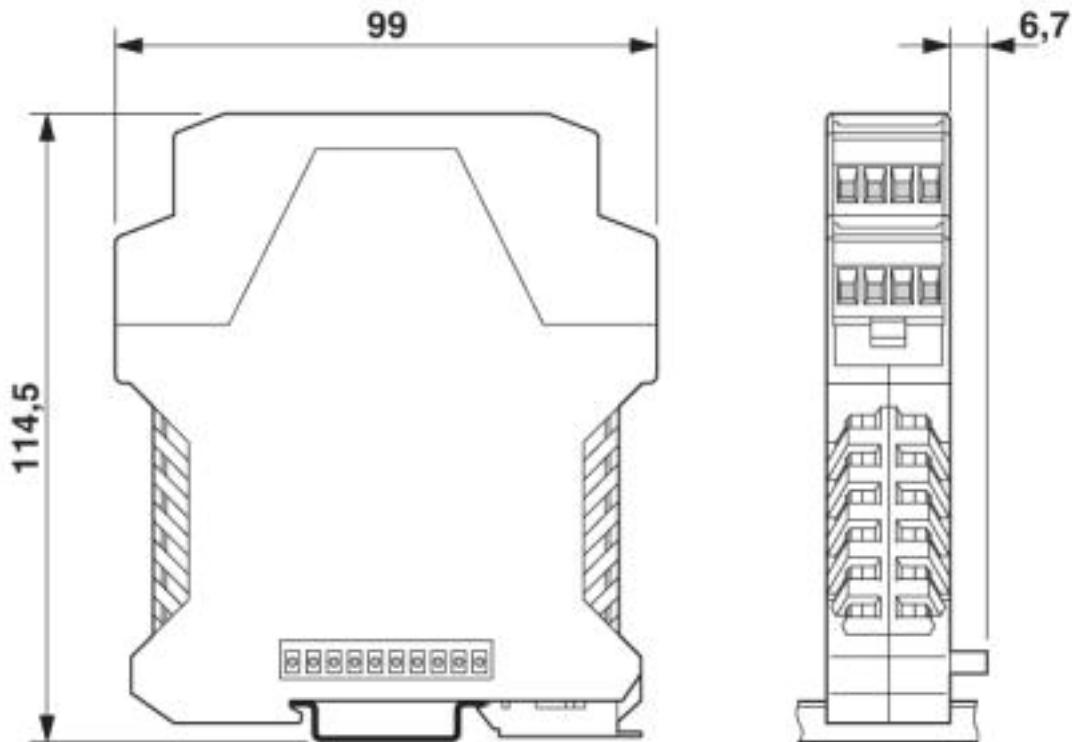

Dimensions of the electronics housing ME.../BUS 5 and ME.../BUS 10 with double-level upper part

Electronic housing - ME 22,5 UT/FE BUS/ 5 GN - 2908744


Dimensioned drawing

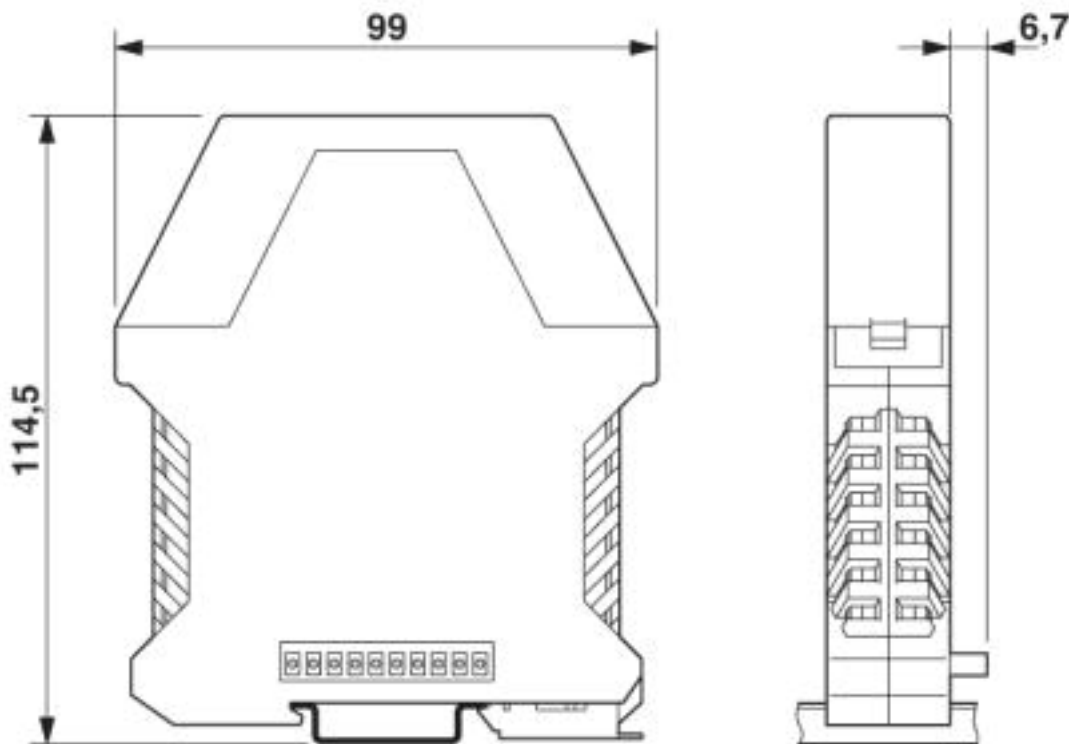

Dimensions of the electronics housing ME.../BUS 5 and ME.../BUS 10 with triple-level upper part

Electronic housing - ME 22,5 UT/FE BUS/ 5 GN - 2908744


Dimensioned drawing

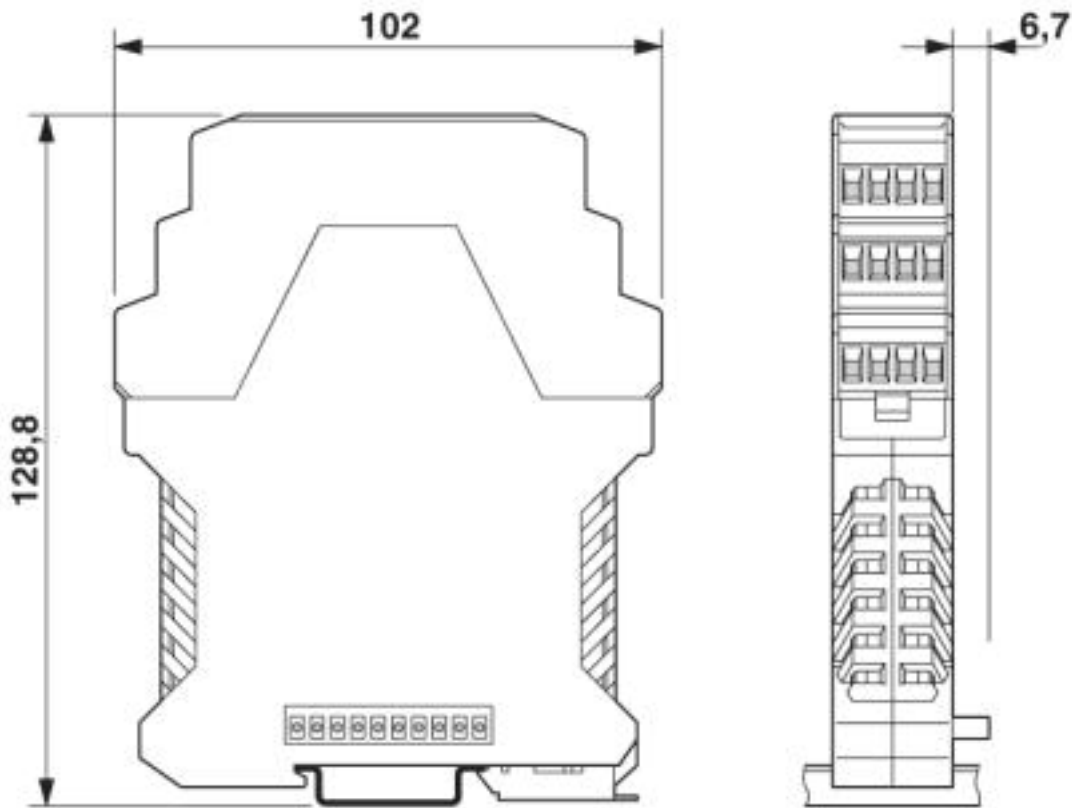

Dimensions of the electronics housing ME.../BUS 5 and ME.../BUS 10 with triple-level upper part

Electronic housing - ME 22,5 UT/FE BUS/ 5 GN - 2908744



Dimensioned drawing

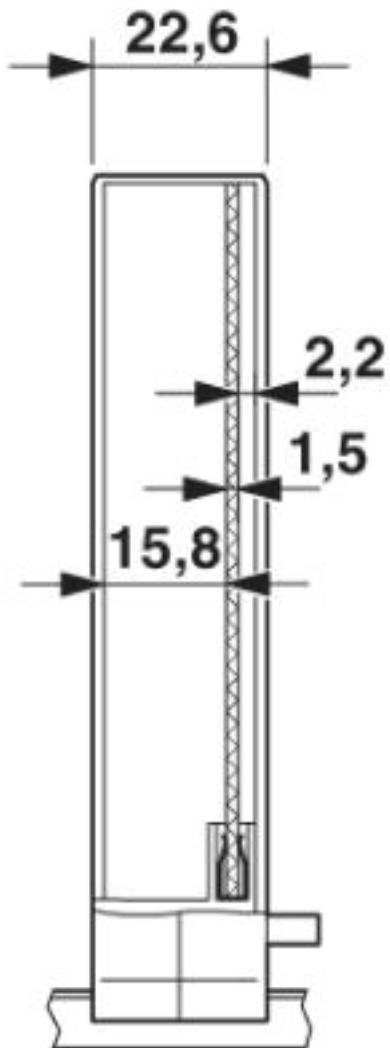

Internal housing dimensions, electronics housing ME 22.5 BUS...



Electronic housing - ME 22,5 UT/FE BUS/ 5 GN - 2908744

Schematic diagram

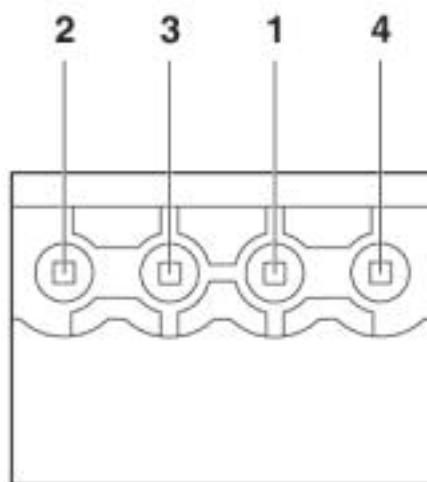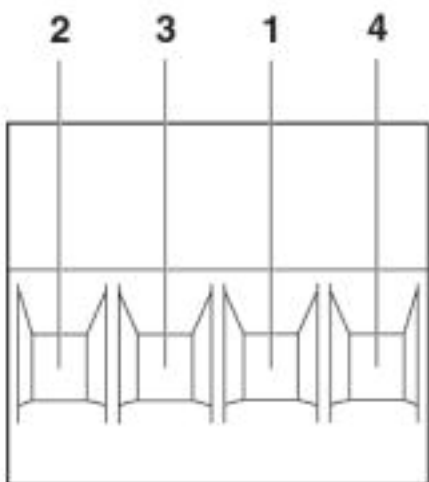

Pin assignment left

Schematic diagram

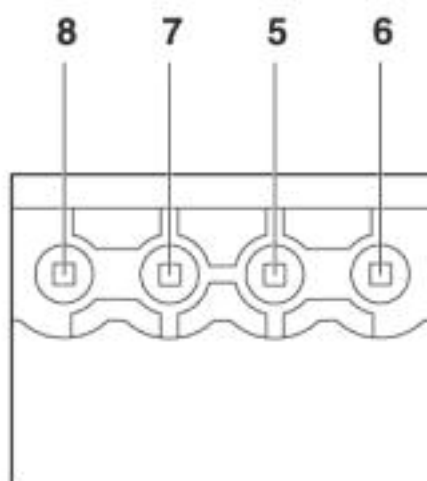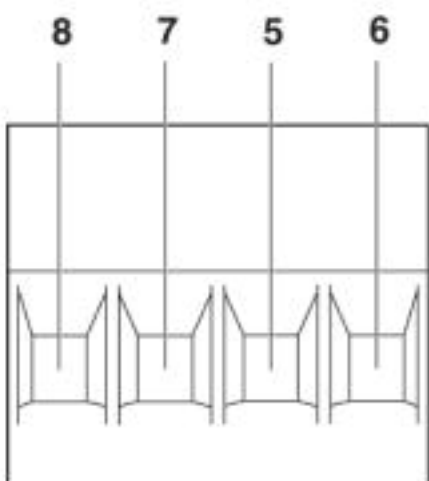

Pin assignment right