

Surge protection connector - PT 2X2-24DC-ST - 2838228

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



PT protective connector with protective circuit for two 2-wire floating signal circuits. 24 V DC nominal voltage. HART-compatible.

The illustration shows version PT 2x2- 5DC-ST

Product Features

- ✓ Plugs can be checked with CHECKMASTER
- ✓ Installed in conjunction with the PT 2x2...-BE base element
- ✓ Maximum ease of maintenance thanks to the two-piece design
- ✓ Base element remains an integral part of the installation
- ✓ Consistent plug-in signal circuit protection
- ✓ Protection for two separate floating signal circuits
- ✓ Impedance-neutral disconnection of plug for test and maintenance purposes



Key commercial data

package_quantity	10
GTIN	4017918182649

Technical data

Dimensions

Height	45 mm
Width	17.7 mm
Depth	52 mm
Pitch unit	1 Div.
Height	90 mm
Width	17.7 mm
Depth	65.5 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Degree of protection	IP20

General

Surge protection connector - PT 2X2-24DC-ST - 2838228

Technical data

General

Housing material	PA 6.6
Inflammability class according to UL 94	V0
Color	black
Standards for air and creepage distances	VDE 0110-1
Standards for air and creepage distances	IEC 60664-1
Mounting type	On base element
Design	DIN rail module, two-section, divisible
Direction of action	Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground
Arrester can be tested with CHECKMASTER from software version:	From SW rev. 1.00

Protective circuit

IEC test classification	C1
IEC test classification	C2
IEC test classification	C3
IEC test classification	D1
VDE requirement class	C1
VDE requirement class	C2
VDE requirement class	C3
VDE requirement class	D1
Nominal voltage U_N	24 V DC
Maximum continuous operating voltage U_c	28 V DC
Maximum continuous operating voltage U_c	20 V AC
Maximum continuous voltage U_c (wire-wire)	28 V DC
Maximum continuous voltage U_c (wire-wire)	20 V AC
Maximum continuous voltage U_c (wire-ground)	28 V DC
Maximum continuous voltage U_c (wire-ground)	20 V AC
Nominal current I_N	450 mA (45°C)
Operating effective current I_c at U_c	$\leq 5 \mu A$
Residual current I_{PE}	$\leq 1 \mu A$ (BE: 2x2+F)
Residual current I_{PE}	$\leq 4 \mu A$
Nominal discharge current I_n (8/20) μs (Core-Core)	10 kA
Nominal discharge current I_n (8/20) μs (Core-Earth)	10 kA
Total surge current (8/20) μs	20 kA
Max. discharge current I_{max} (8/20) μs maximum (Core-Core)	10 kA
Max. discharge current I_{max} (8/20) μs maximum (Core-Earth)	10 kA
Impulse discharge current (10/350) μs , peak value I_{imp}	2.5 kA (per path)
Output voltage limitation at 1 kV/ μs (Core-Core) spike	$\leq 40 V$
Output voltage limitation at 1 kV/ μs (Core-Earth) spike	$\leq 450 V$
Output voltage limitation at 1 kV/ μs (Core-Core) static	$\leq 40 V$
Residual voltage at I_n , (conductor-conductor)	$\leq 40 V$

Surge protection connector - PT 2X2-24DC-ST - 2838228

Technical data

Protective circuit

Residual voltage at In, (conductor-GND)	≤ 450 V
Residual voltage with I _{an} (10/1000)μs (conductor-conductor)	≤ 50 V
Voltage protection level U _p (Core-Core)	≤ 50 V (C3 - 25 A)
Response time t _A (Core-Core)	≤ 1 ns
Response time t _A (Core-Earth)	≤ 100 ns
Input attenuation aE, sym.	0.5 dB (≤ 1 MHz)
Cut-off frequency f _g (3 dB), sym. in 50 Ohm system	typ. 6 MHz
Capacity (Core-Core)	1.4 nF
Resistance in series	2.2 Ω (Path 1-2/5-6)
Resistance in series	2.2 Ω (Path 7-8, 11-12)
Message: Surge protection fault	None
Max. required back-up fuse	500 mA (e.g. T (IEC 127-2/III))
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C2 (10 kV/5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C3 (25 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C2 (10 kV/5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	D1 (2.5 kA)

Connection data

Connection method	Screw connection (in connection with the base element)
Connection type IN	PLUGTRAB plug-in system
Connection type OUT	PLUGTRAB plug-in system
Screw thread	M3
Tightening torque	0.8 Nm
Stripping length	8 mm
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

Standards and Regulations

Standards/regulations	IEC 61643-21
Standards/regulations	DIN EN 61643-21
Standards/regulations	UL 497B

classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801

Surge protection connector - PT 2X2-24DC-ST - 2838228

classifications

eCl@ss

eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807

ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

approvals

UL Listed / cUL Listed / ATEX / cULus Listed / UL Listed / GOST / GL /



Approval details

UL Listed 
cUL Listed 
ATEX 
cULus Listed 


Surge protection connector - PT 2X2-24DC-ST - 2838228

approvals

Nominal voltage UN	24 V
Nominal current IN	0.45 A
mm ² /AWG/kcmil	



accessories

Marker pen

X-PEN 0,35 - 0811228



Terminal marking

ZBF 5:UNBEDRUCKT - 0808642



ZBF 5/WH-100:UNBEDRUCKT - 0808668



Labeled terminal marker

Surge protection connector - PT 2X2-24DC-ST - 2838228

accessories

ZBF 5,LGS:FORTL.ZAHLEN - 0808671



ZBF 5,LGS:GERADE ZAHLEN - 0810821



ZBF 5,LGS:UNGERADE ZAHLEN - 0810863



ZBF 5,QR:FORTL.ZAHLEN - 0808697



Device marking

ZBN 18:UNBEDRUCKT - 2809128



Surge protection connector - PT 2X2-24DC-ST - 2838228

accessories

ZBF 15:SO/CMS - 0814717



ZBF 5:SO/CMS - 0808707




ZBN 18:SO/CMS - 0800763



Drawings

Surge protection connector - PT 2X2-24DC-ST - 2838228

Dimensioned drawing

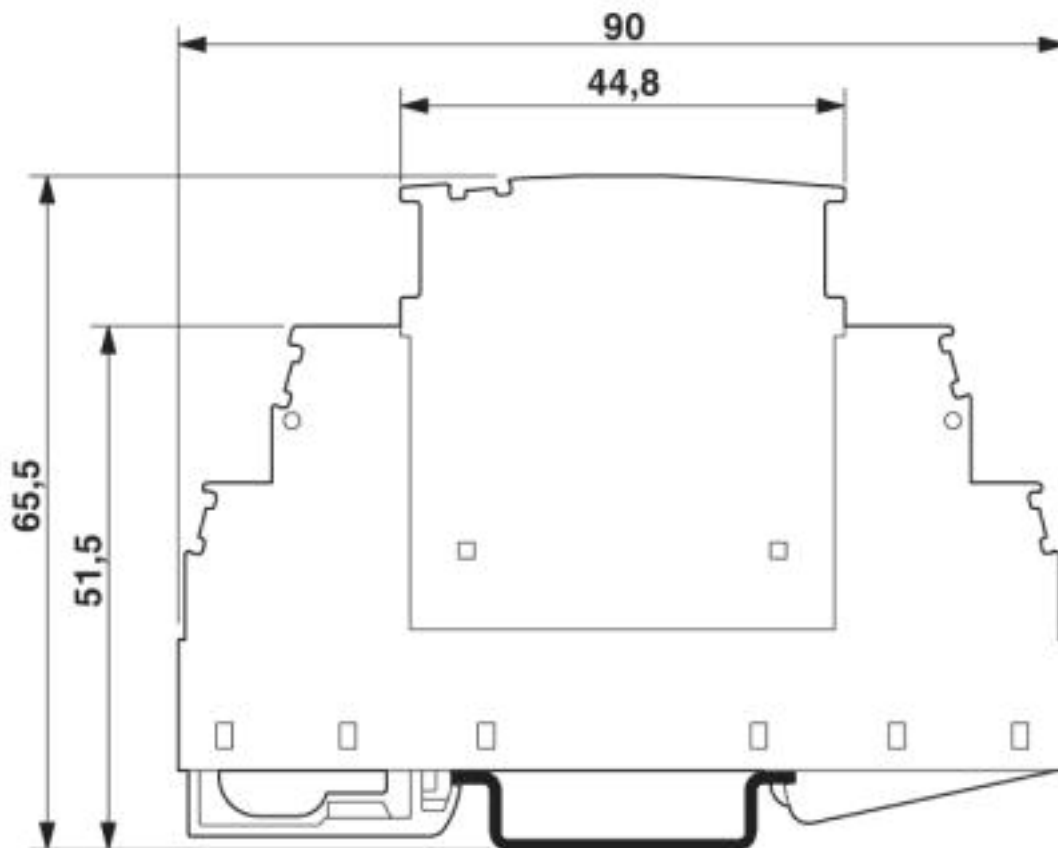

The figure shows the complete module consisting of a base element and connector

Circuit diagram

