

Disconnect terminal block - URTK/SS - 0321019

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Disconnect terminal block, Connection method: Screw connection, Cross section: 0.2 mm² -4 mm², AWG: 24 - 12, Width: 6.2 mm, Mounting type: NS 35/7,5, NS 35/15, NS 32, Color: gray

Product Features

- ✓ Measuring equipment or protective relays can be individually connected with the aid of bridges and slides
- ✓ Here, the slides make contact with the switching jumper depending on the switching task

Key commercial data

package_quantity	50
GTIN	4017918001698

Technical data

General

Number of levels	1
Number of connections	2
Color	gray
Insulating material	PA
Inflammability class according to UL 94	V0

General

Rated surge voltage	6 kV
Pollution degree	3
Surge voltage category	III
Insulating material group	I
Connection in acc. with standard	IEC 60947-7-1
Nominal current I _N	26 A
Nominal voltage U _N	400 V
Open side panel	ja
Shock protection test specification	DIN EN 50274 (VDE 0660-514):2002-11
Back of the hand protection	guaranteed
Finger protection	guaranteed
Surge voltage test setpoint	7.3 kV
Result of surge voltage test	Test passed
Power frequency withstand voltage setpoint	1.89 kV
Result of power-frequency withstand voltage test	Test passed

Disconnect terminal block - URTK/SS - 0321019

Technical data

General

Checking the mechanical stability of terminal points (5 x conductor connection)	Test passed
Bending test rotation speed	10 rpm
Bending test turns	135
Bending test conductor cross section/weight	0.2 mm ² / 0.2 kg
Bending test conductor cross section/weight	4 mm ² / 0.9 kg
Result of bending test	Test passed
Conductor cross section tensile test	0.2 mm ²
Tractive force setpoint	10 N
Conductor cross section tensile test	4 mm ²
Tractive force setpoint	60 N
Tensile test result	Test passed
Tight fit on carrier	NS 32/NS 35
Setpoint	1 N
Result of tight fit test	Test passed
Requirements, voltage drop	≤ 6,4 mV
Result of voltage drop test	Test passed
Temperature-rise test	Test passed
Conductor cross section short circuit testing	4 mm ²
Short-time current	0.48 kA
Short circuit stability result	Test passed
Proof of thermal characteristics (needle flame) effective duration	30 s
Result of thermal test	Test passed
Temperature index, insulating material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Static insulating material application in cold	-60 °C

Dimensions

Length	56.5 mm
Width	6.2 mm
Height NS 35/7,5	40 mm
Height NS 35/15	47.5 mm
Height NS 32	45 mm

Connection data

Note	Terminal point
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

Disconnect terminal block - URTK/SS - 0321019

Technical data

Connection data

Conductor cross section stranded, with ferrule without plastic sleeve min.	0.25 mm ²
Conductor cross section stranded, with ferrule without plastic sleeve max.	4 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.25 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve max.	2.5 mm ²
2 conductors with same cross section, solid min.	0.2 mm ²
2 conductors with same cross section, solid max.	1.5 mm ²
2 conductors with same cross section, stranded min.	0.2 mm ²
2 conductors with same cross section, stranded max.	1.5 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	0.25 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	1.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	2.5 mm ²
Connection method	Screw connection
Stripping length	7 mm
Screw thread	M3
Tightening torque, min	0.6 Nm
Tightening torque max	0.8 Nm

classifications

eCl@ss

eCl@ss 4.0	27141126
eCl@ss 4.1	27141126
eCl@ss 5.0	27141127
eCl@ss 5.1	27141127
eCl@ss 6.0	27141127
eCl@ss 7.0	27141127
eCl@ss 8.0	27141127

ETIM

ETIM 2.0	EC000902
ETIM 3.0	EC000902
ETIM 4.0	EC000902
ETIM 5.0	EC000902

UNSPSC

UNSPSC 6.01	30211811
-------------	----------

Disconnect terminal block - URTK/SS - 0321019

classifications

UNSPSC

UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

approvals

CSA / UL Recognized / cUL Recognized / GOST / PRS / GOST / cULus Recognized /

Approval details

CSA 	
Nominal voltage UN	300 V
Nominal current IN	25 A
mm²/AWG/kcmil	28-12

UL Recognized 	
Nominal voltage UN	300 V
Nominal current IN	20 A
mm²/AWG/kcmil	28-12

cUL Recognized 	
Nominal voltage UN	300 V
Nominal current IN	20 A
mm²/AWG/kcmil	28-12

GOST 	
---	--

PRS

Disconnect terminal block - URTK/SS - 0321019

approvals



cULus Recognized  US

accessories

End cover

D-URTK/SS - 0321022



Short-circuit connector

KSS 6 - 0301547



KSS 3- 6 - 0309523



Partition plate

TS-URTK/SS - 0321213



Disconnect terminal block - URTK/SS - 0321019

accessories

Partition plate

ATS-URTK/SS - 0321226



Terminal marking

SBS 6:UNBEDRUCKT - 1007222



ZB 6:UNBEDRUCKT - 1051003



UC-TM 6 - 0818085



UCT-TM 6 - 0828736



Screwdriver tools

Disconnect terminal block - URTK/SS - 0321019

accessories

SZS 0,6X3,5 - 1205053



Bridge

FBRNI 2-6 N - 2778550



FBRNI 10-6 N - 2770626



FBRNI 4-6 N - 3005976



EB 10- 6 - 0201139



Disconnect terminal block - URTK/SS - 0321019

accessories

EB 3- 6 - 0201142



EB 2- 6 - 0201155



Mounting rail

NS 32 PERF 2000MM - 1201002



NS 32 UNPERF 2000MM - 1201015



NS 35/ 7,5 PERF 2000MM - 0801733



Disconnect terminal block - URTK/SS - 0321019

accessories

NS 35/ 7,5 UNPERF 2000MM - 0801681



NS 35/ 7,5 WH PERF 2000MM - 1204119



NS 35/ 7,5 WH UNPERF 2000MM - 1204122



NS 35/ 7,5 AL UNPERF 2000MM - 0801704



NS 35/ 7,5 ZN PERF 2000MM - 1206421



NS 35/ 7,5 ZN UNPERF 2000MM - 1206434



Disconnect terminal block - URTK/SS - 0321019

accessories

NS 35/ 7,5 CU UNPERF 2000MM - 0801762



NS 35/ 7,5 CAP - 1206560



NS 35/15 PERF 2000MM - 1201730



NS 35/15 UNPERF 2000MM - 1201714



NS 35/15 WH PERF 2000MM - 0806602



Disconnect terminal block - URTK/SS - 0321019

accessories

NS 35/15 WH UNPERF 2000MM - 1204135



NS 35/15 AL UNPERF 2000MM - 1201756



NS 35/15 ZN PERF 2000MM - 1206599



NS 35/15 ZN UNPERF 2000MM - 1206586



NS 35/15 CU UNPERF 2000MM - 1201895



NS 35/15 CAP - 1206573



Disconnect terminal block - URTK/SS - 0321019

accessories

NS 35/15-2,3 UNPERF 2000MM - 1201798



Labeled terminal marker

ZB 6 CUS - 0824992



UC-TM 6 CUS - 0824589



UCT-TM 6 CUS - 0829602



End block

CLIPFIX 35 - 3022218



Disconnect terminal block - URTK/SS - 0321019

accessories

CLIPFIX 35-5 - 3022276



E/NS 35 N - 0800886



E/UK - 1201442



E/UK 1 - 1201413




Drawings

Circuit diagram



Disconnect terminal block - URTK/SS - 0321019


Circuit diagram

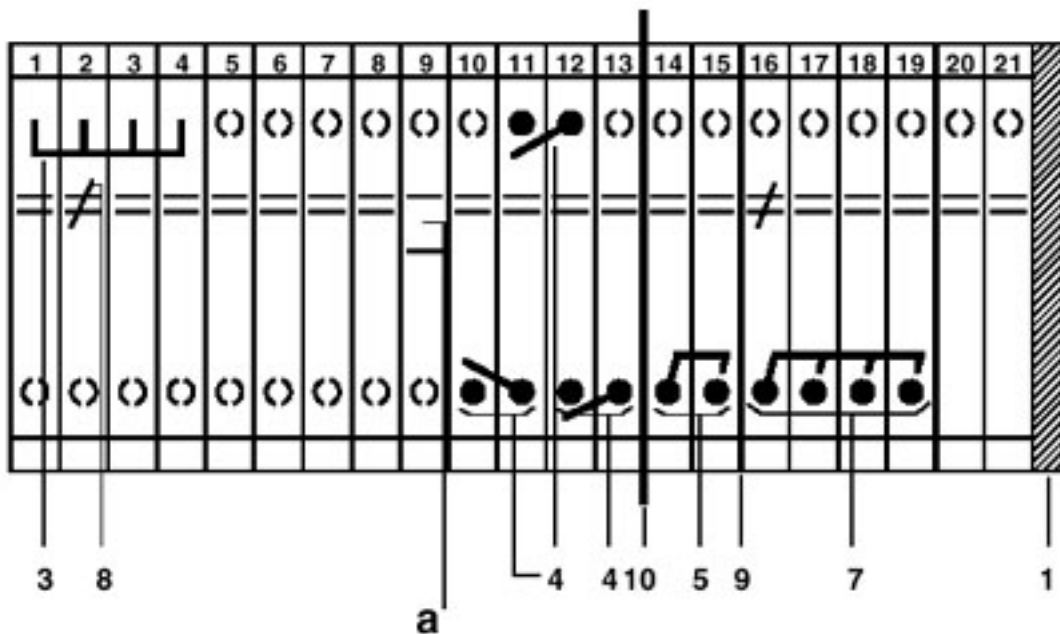

a = open
 1 = cover
 3 = fixed bridge
 4 = switch bar, for 2 terminal blocks, useable on both sides of the disconnect point, inward switching motion
 5 = switch bar, for 2 terminal blocks, useable on both sides of the disconnect point, outward switching motion
 7 = switch bar, for 3-phase short-circuiting of linked current transformer sets, only on the right
 8 = switching lock, prevents disconnect slide from being actuated
 9 = separating plate, for electrical separation of neighboring bridges in terminal center
 10 = partition plate

Disconnect terminal block - URTK/SS - 0321019


Schematic diagram

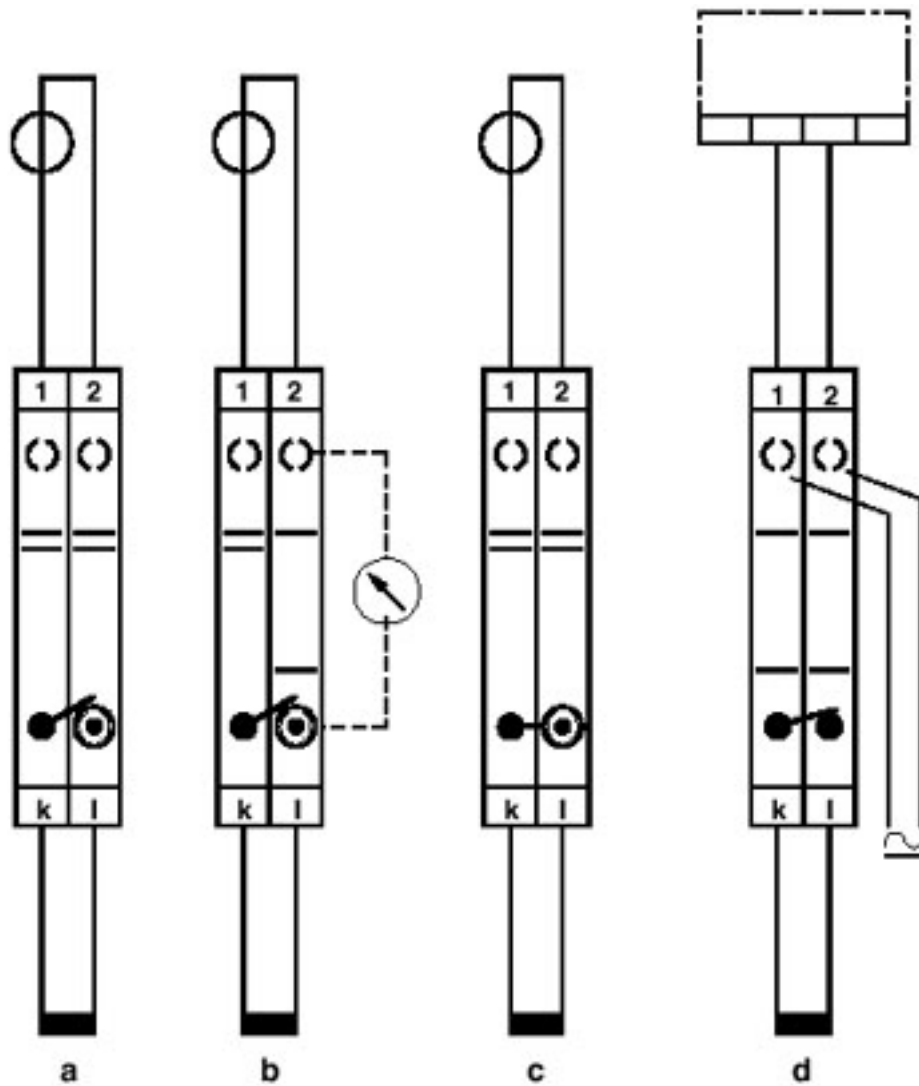

Simple current transformer test circuit
 a = normal operation
 b = measured value testing
 c = transformer short-circuiting
 d = relay testing

Disconnect terminal block - URTK/SS - 0321019


Schematic diagram

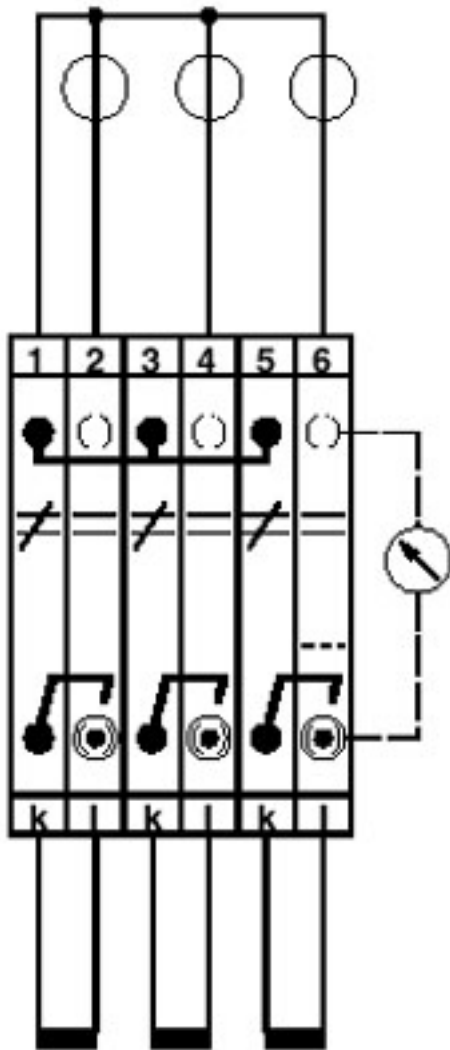

Three-phase transducer test set

Disconnect terminal block - URTK/SS - 0321019

Schematic diagram

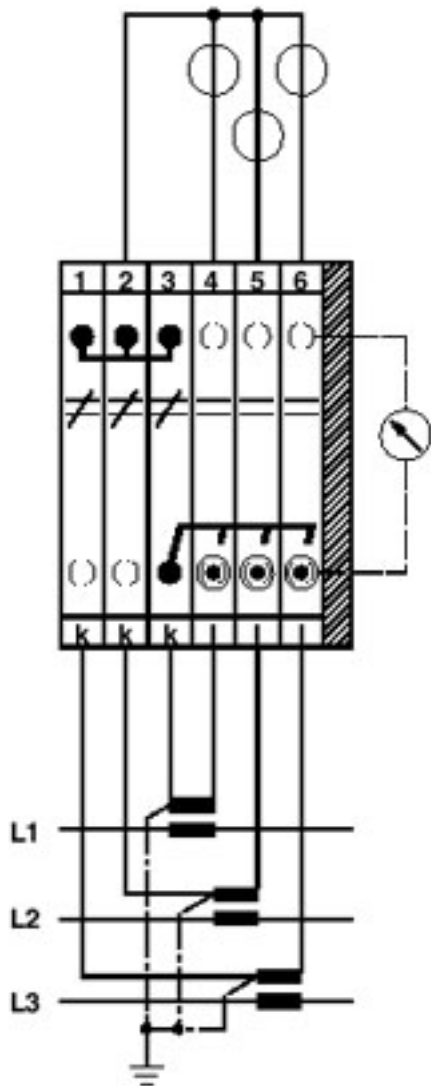

Three-phase linked transducer test set

© Phoenix Contact 2013 - all rights reserved
<http://www.phoenixcontact.com>