

## Bus system cable - SAC-5PY-F/2X 0,3-920-MS-FS - 1436013

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Bus system cable, CANopen<sup>®</sup>, DeviceNet<sup>™</sup>, CANopen<sup>®</sup>/DeviceNet<sup>™</sup>, 5-position, PUR halogen-free, Violet, RAL 4001, shielded, Socket straight M12 SPEEDCON, A-coded, on Socket straight M12 SPEEDCON, A-coded and Plug straight M12 SPEEDCON, A-coded, Cable length: 0.3 m, all connectors unshielded, Shield connected to pin 1



### Key commercial data

package_quantity	1
GTIN	4046356428361

### Technical data

#### Dimensions

Length of cable	0.3 m
-----------------	-------

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)
Degree of protection	IP65
Degree of protection	IP67

#### General

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Coding	A - standard
Signal type/category	CANopen <sup>®</sup>
Signal type/category	DeviceNet <sup>™</sup>
Status display	No
Surge voltage category	II
Pollution degree	3

#### Material

Inflammability class according to UL 94	HB
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF

# Bus system cable - SAC-5PY-F/2X 0,3-920-MS-FS - 1436013

## Technical data

### Material

<b>Material of grip body</b>	TPU, hardly inflammable, self-extinguishing
<b>Material, knurls</b>	Nickel-plated brass
<b>Sealing material</b>	NBR

### Pin assignment

<b>Position = wire color (signal) = position (optional)</b>	1 (Distributor) = SR (shield) = 1 (Plug); 1 (Socket)
<b>Position = wire color (signal) = position (optional)</b>	2 (Distributor) = RD (V+) = 2 (Plug); 2 (Socket)
<b>Position = wire color (signal) = position (optional)</b>	3 (Distributor) = BK (V-) = 3 (Plug); 3 (Socket)
<b>Position = wire color (signal) = position (optional)</b>	4 (Distributor) = WH (CAN_H) = 4 (Plug); 4 (Socket)
<b>Position = wire color (signal) = position (optional)</b>	5 (Distributor) = BU (CAN_L) = 5 (Plug); 5 (Socket)

### Cable

<b>Cable type</b>	CAN Bus/DeviceNet
<b>Cable type (abbreviation)</b>	920
<b>Conductor cross section</b>	2x 0.25 mm <sup>2</sup> (signal line)
<b>Conductor cross section</b>	2x 0.34 mm <sup>2</sup> (Power supply)
<b>Conductor cross section</b>	1x 0.34 mm <sup>2</sup> (Drain wire)
<b>AWG signal line</b>	24
<b>AWG power supply</b>	22
<b>Conductor structure signal line</b>	19x 0.13 mm
<b>Conductor structure, voltage supply</b>	19x 0.15 mm
<b>Core diameter including insulation</b>	1.95 mm ±0.05 mm (signal line)
<b>Core diameter including insulation</b>	1.4 mm ±0.05 mm (Power supply)
<b>Wire colors</b>	Red-black, blue-white
<b>Twisted pairs</b>	2 cores to the pair
<b>Type of pair shielding</b>	Aluminum-lined polyester foil
<b>Overall twist</b>	2 pairs around a drain wire in the center to the core
<b>Shielding</b>	Tinned copper braided shield
<b>Optical shield covering</b>	80 %
<b>External sheath, color</b>	Violet, RAL 4001
<b>External cable diameter D</b>	6.7 mm ±0.3 mm
<b>Smallest bending radius, fixed installation</b>	67 mm
<b>Smallest bending radius, movable installation</b>	67 mm
<b>Number of bending cycles</b>	2000000
<b>Bending radius</b>	67 mm
<b>Traversing path</b>	4.5 m
<b>Traversing rate</b>	3 m/s
<b>Acceleration</b>	3 m/s <sup>2</sup>
<b>Outer sheath, material</b>	PUR
<b>Material conductor insulation</b>	Foamed PE (signal line)
<b>Material conductor insulation</b>	PE (Power supply)
<b>Conductor material</b>	Tin-plated Cu litz wires

# Bus system cable - SAC-5PY-F/2X 0,3-920-MS-FS - 1436013

## Technical data

### Cable

Insulation resistance	≥ 5 GΩ*km (signal line)
Insulation resistance	≥ 5 GΩ*km (Power supply)
Working capacitance	nom. 40 nF (signal line)
Wave impedance	120 Ω ± 12 Ω (with 1 MHz)
Nominal voltage, cable	max. 300 V
Test voltage, cable	2000 V (50 Hz, 1 min.)
Flame resistance	UL 1581, Sec. 1060 (FT-1)
Flame resistance	IEC 60332-1
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation)
Ambient temperature (operation)	-20 °C ... 70 °C (cable, flexible installation)

## classifications

### eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	27061801

### ETIM

ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC001855


### UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

## approvals

GOST /


### Approval details


---

# Bus system cable - SAC-5PY-F/2X 0,3-920-MS-FS - 1436013


## Drawings

Dimensioned drawing

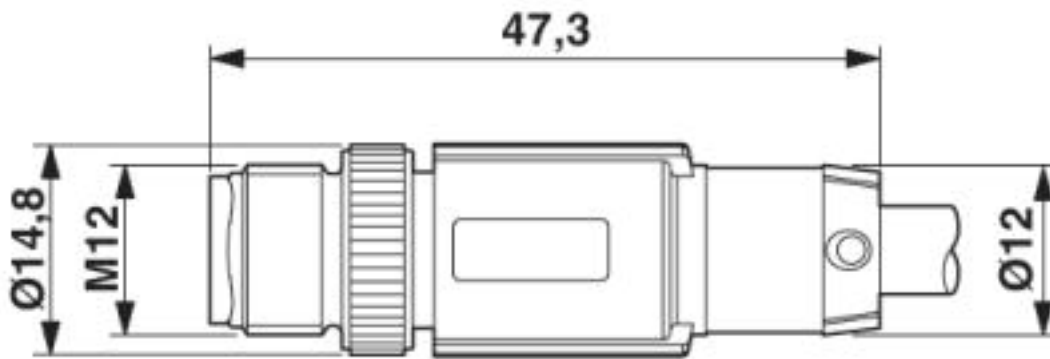

M12 SPEEDCON plug, straight


Dimensioned drawing

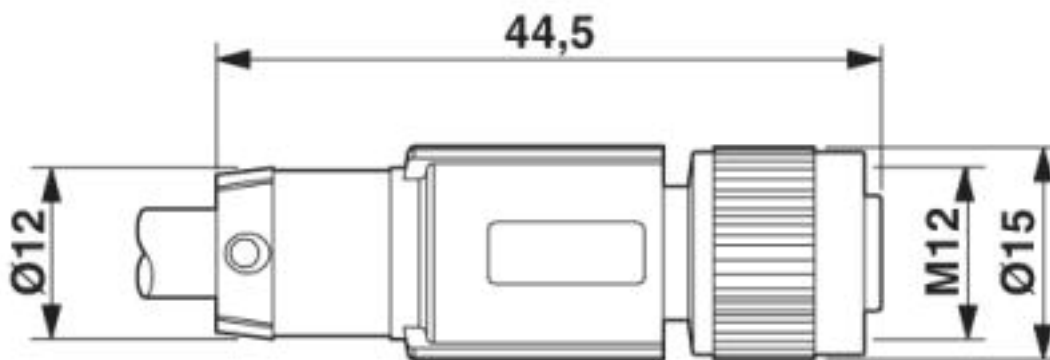

M12-SPEEDCON socket, straight

# Bus system cable - SAC-5PY-F/2X 0,3-920-MS-FS - 1436013


Dimensioned drawing

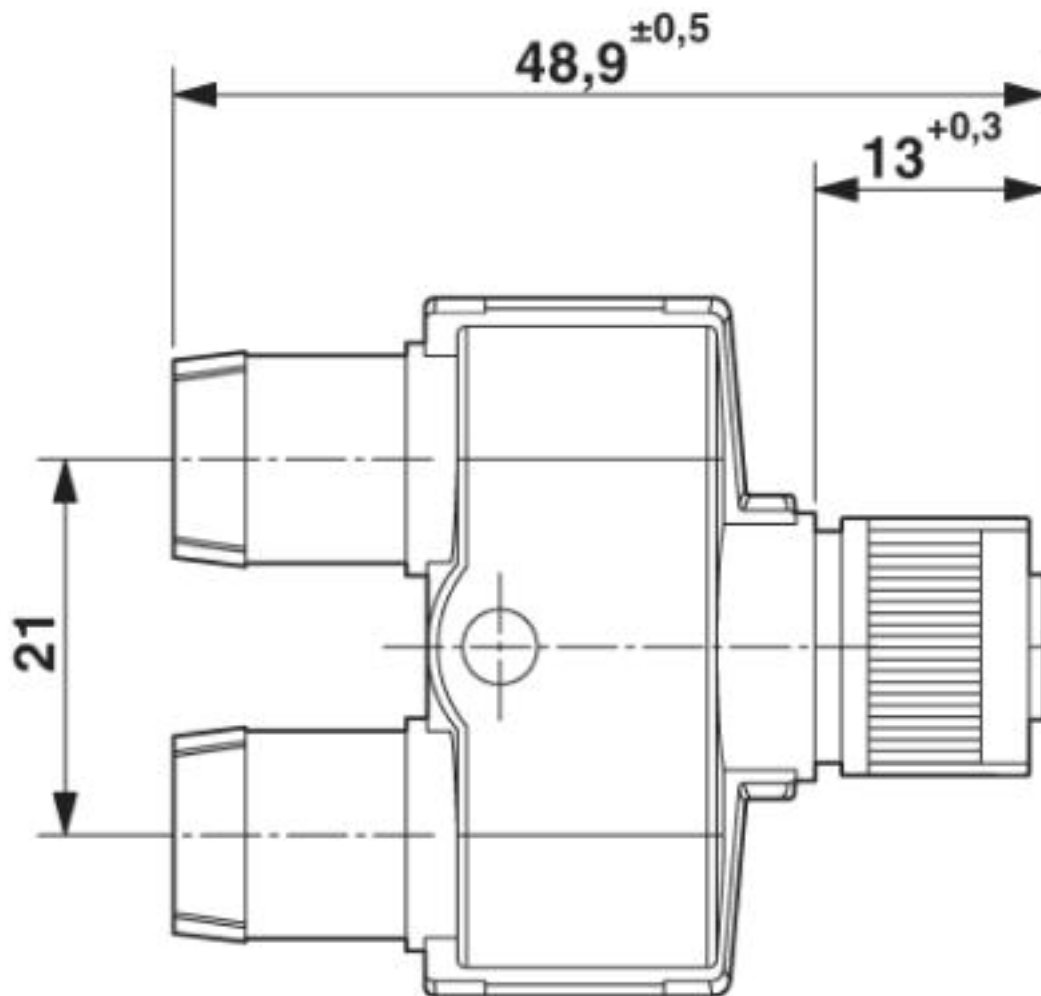

M12-SPEEDCON socket, Y-distributor

# Bus system cable - SAC-5PY-F/2X 0,3-920-MS-FS - 1436013


Circuit diagram

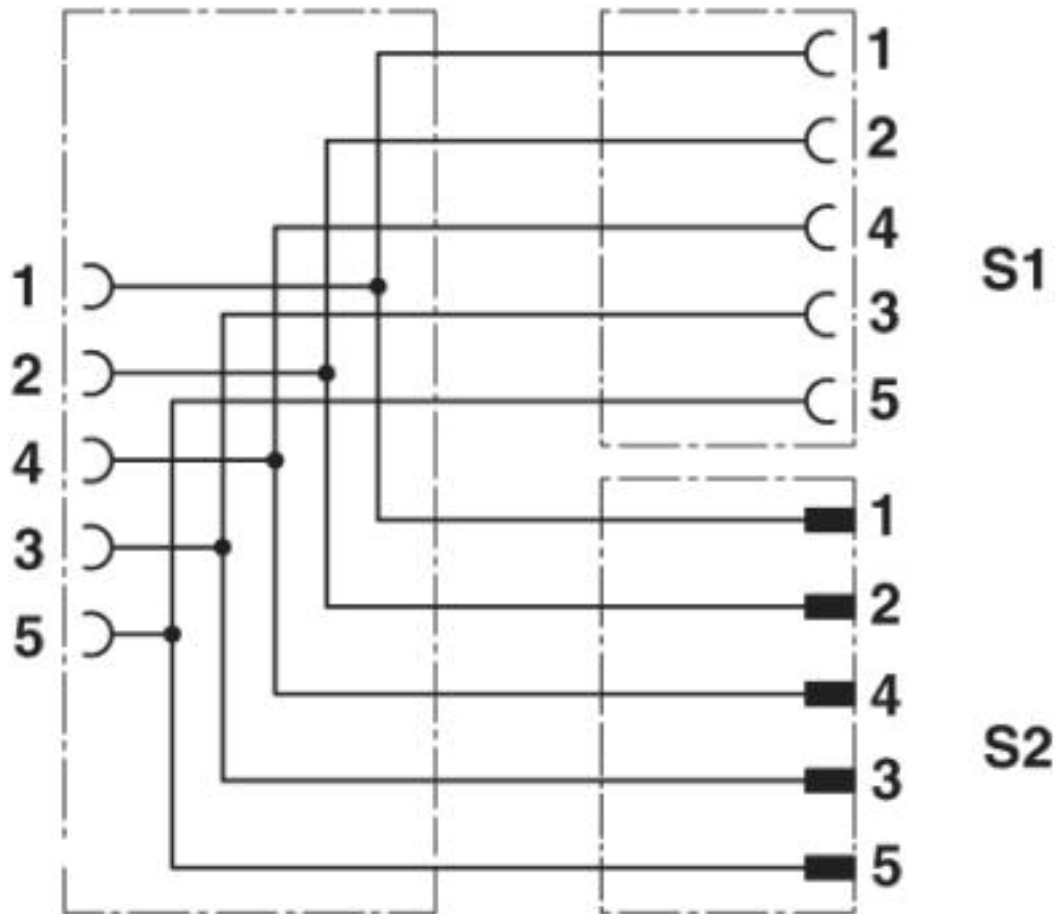

Contact assignment of the M12 socket and the M12 plug

# Bus system cable - SAC-5PY-F/2X 0,3-920-MS-FS - 1436013


Schematic diagram

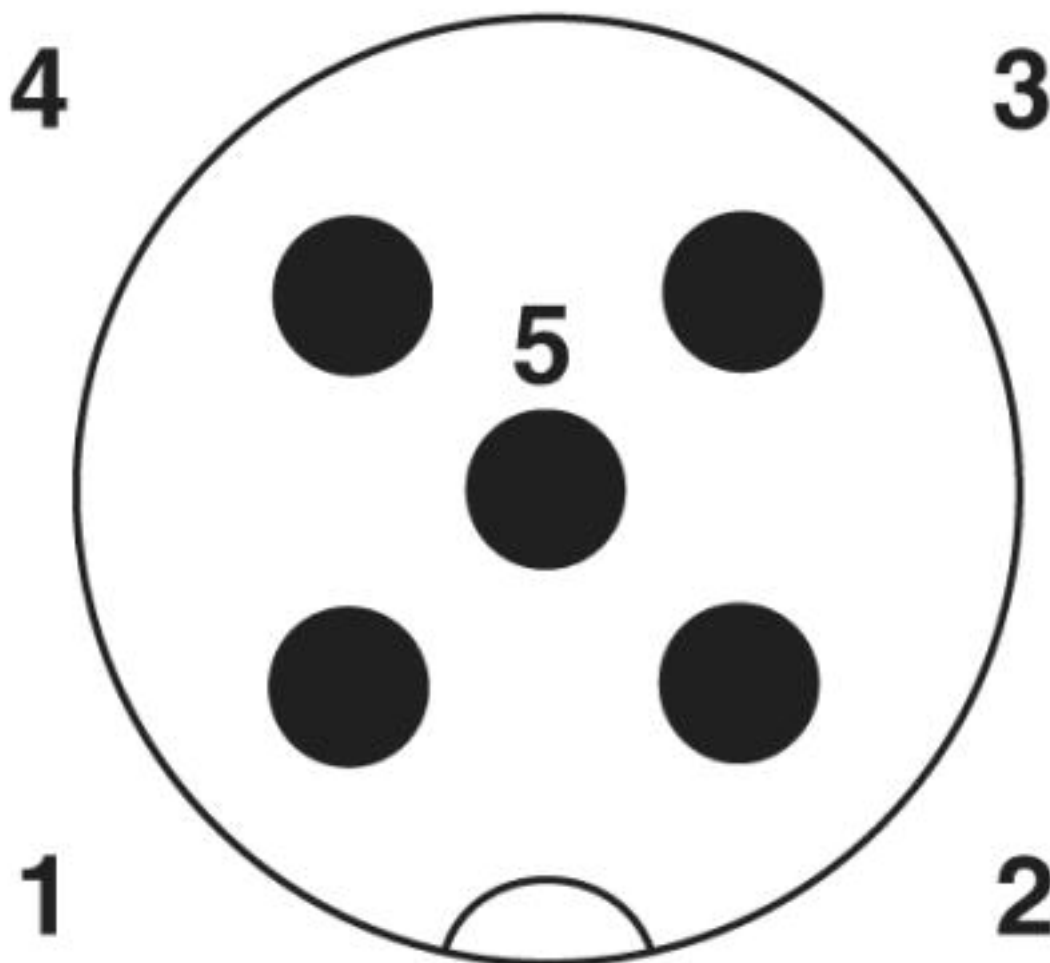

Pin assignment M12 male connector, 5-pos., A-coded, male side

# Bus system cable - SAC-5PY-F/2X 0,3-920-MS-FS - 1436013

Schematic diagram

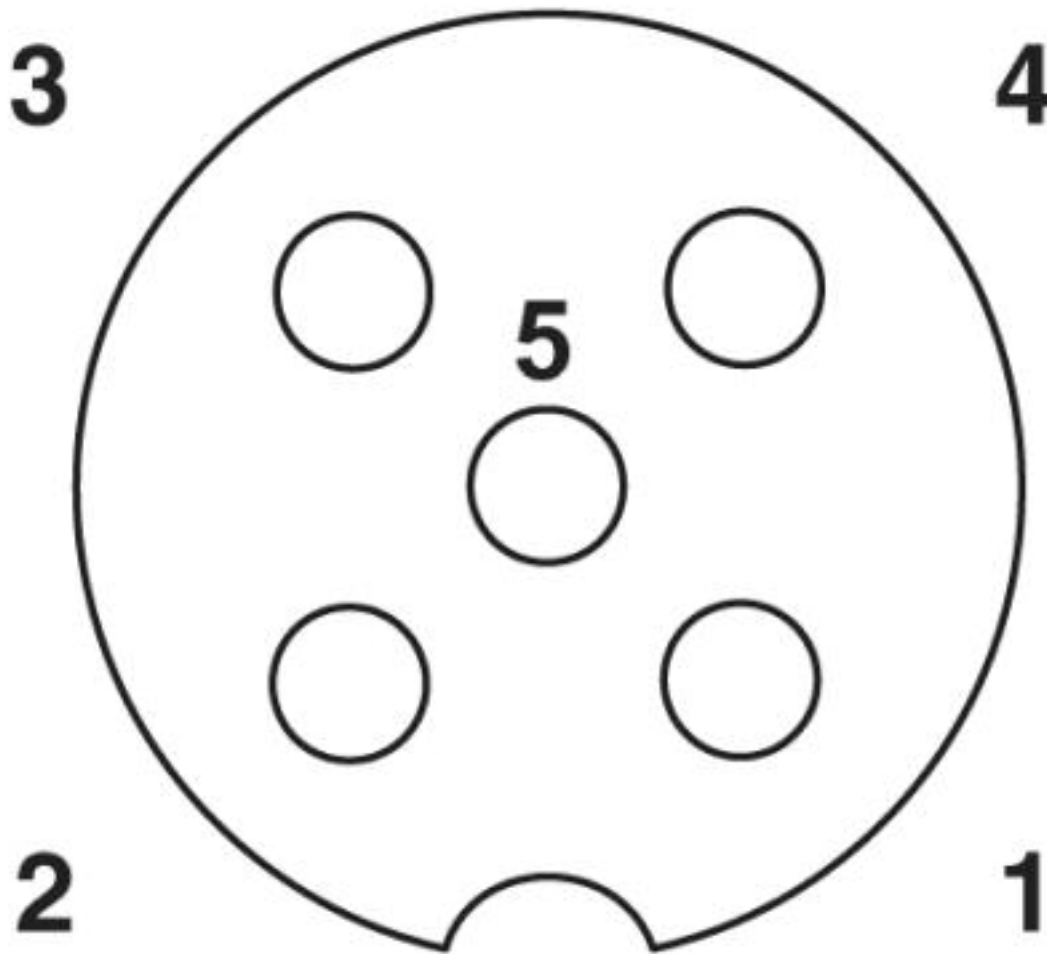

Pin assignment M12 socket, 5-pos., A-coded, socket side view



## Bus system cable - SAC-5PY-F/2X 0,3-920-MS-FS - 1436013

Cable cross section



CAN Bus/DeviceNet [920]

© Phoenix Contact 2013 - all rights reserved  
<http://www.phoenixcontact.com>