

Surge protection device - PT-IQ-5-HF-5DC-PT - 2801291

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Surge protection, consisting of protective plug and base element, with integrated multi-stage status indicator on the module for five signal wires. For HF applications and telecommunications interfaces without supply voltage (up to 90 Mbps).

The figure shows the PT-IQ-5-HF
+F-5DC-PT version

Product Features

- ✓ Surge protection system
- ✓ Multi-level state monitoring
- ✓ Collective message about supply and remote module
- ✓ System supplied via DIN rail bus
- ✓ Up to 28 protection modules per supply module
- ✓ For HF applications, thanks to high transmission speeds
- ✓ Maximum ease of maintenance thanks to the two-piece design
- ✓ Codable plug
- ✓ Impedance-neutral disconnection of plug for maintenance purposes
- ✓ Base element remains an integral part of the installation

Key commercial data

package_quantity	1
GTIN	4046356766722

Technical data

Dimensions

Height	109.3 mm
Width	17.7 mm
Depth	77.5 mm
Pitch unit	1 Div.

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Degree of protection	IP20

General

Housing material	PA 6.6
Inflammability class according to UL 94	V0
Color	black

Surge protection device - PT-IQ-5-HF-5DC-PT - 2801291

Technical data

General

Standards for air and creepage distances	IEC 60664-1
Mounting type	DIN rail: 35 mm
Design	DIN rail module, two-section, divisible
Direction of action	Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground
Transmission speed	90 MBit/s

Protective circuit

IEC test classification	C1
IEC test classification	C2
IEC test classification	C3
IEC test classification	D1
Nominal voltage U_N	5 V DC
Maximum continuous operating voltage U_C	6 V DC
Maximum continuous operating voltage U_C	4 V AC
Nominal current I_N	600 mA (up to 40 °C)
Operating effective current I_C at U_C	$\leq 800 \mu A$ (per system)
Residual current I_{PE}	$\leq 800 \mu A$ (per system)
Nominal discharge current I_n (8/20) μs (Core-Core)	10 kA
Nominal discharge current I_n (8/20) μs (Core-Earth)	10 kA
Total surge current (8/20) μs	20 kA
Impulse discharge current (10/350) μs , peak value I_{imp}	2.5 kA
Voltage protection level U_P (Core-Core)	$\leq 90 V$ (C1 - 1 kV/500 A)
Voltage protection level U_P (Core-Core)	$\leq 30 V$ (C3 - 25 A)
Voltage protection level U_P (Core-Core)	$\leq 30 V$ (C3 - 50 A)
Voltage protection level U_P (Core-Core)	$\leq 140 V$ (C2 - 10 kV / 5 kA)
Voltage protection level U_P (Core-Earth)	$\leq 90 V$ (C1 - 1 kV/500 A)
Voltage protection level U_P (Core-Earth)	$\leq 140 V$ (C2 - 10 kV / 5 kA)
Voltage protection level U_P (Core-Earth)	$\leq 30 V$ (C3 - 25 A)
Voltage protection level U_P (Core-Earth)	$\leq 30 V$ (C3 - 50 A)
Voltage protection level U_P static (core-core)	$\leq 45 V$ (C1 - 1 kV/500 A)
Voltage protection level U_P static (core-ground)	$\leq 45 V$ (C1 - 1 kV/500 A)
Response time t_A (Core-Core)	$\leq 1 ns$
Response time t_A (Core-Earth)	$\leq 1 ns$
Input attenuation a_E , sym.	typ. 0.3 dB ($\leq 10 MHz/150 \Omega$)
Cut-off frequency f_g (3 dB), sym. in 150 Ohm system	$> 60 MHz$
Capacity (Core-Core)	typ. 30 pF
Capacity (Core-GND)	typ. 30 pF
Resistance in series	$1.2 \Omega \pm 5 \%$
Message: Surge protection fault	Optical, multi-stage
Max. required back-up fuse	0.6 A (FF)

Surge protection device - PT-IQ-5-HF-5DC-PT - 2801291

Technical data

Protective circuit

Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C1 (1 kV/500 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C2 (10 kV/5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C2 (10 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C3 (25 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C3 (50 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C1 (1 kV / 500 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C2 (10 kV / 5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C2 (10 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C3 (25 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C3 (50 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	D1 (2.5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-GND)	C1 (1 kV/500 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-GND)	C2 (10 kV/5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-GND)	C2 (10 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-GND)	C3 (25 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-GND)	C3 (50 A)
Pulse reset time t_r in acc. with IEC 61643-21 (Core-Core)	≤ 10 ms
Pulse reset time t_r in acc. with IEC 61643-21 (Core-GND)	≤ 10 ms
Overload failure mode as per IEC 61643-21 (plug)	Mode 2

Connection data

Connection method	Push-in connection
Connection type IN	Push-in connection
Connection type OUT	Push-in connection
Stripping length	10 mm
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

Connection, equipotential bonding

Connection method	NS 35 DIN rail or connection terminal block
-------------------	---

classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807

Surge protection device - PT-IQ-5-HF-5DC-PT - 2801291

classifications

eCl@ss

eCl@ss 7.0	27130807
eCl@ss 8.0	27130807

ETIM

ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

accessories

Marker pen

X-PEN 0,35 - 0811228



Terminal marking

ZBF 5:UNBEDRUCKT - 0808642



ZBF 5/WH-100:UNBEDRUCKT - 0808668



Surge protection device - PT-IQ-5-HF-5DC-PT - 2801291

accessories

Labeled terminal marker

ZBF 5,LGS:FORTL.ZAHLEN - 0808671



ZBF 5,LGS:GERADE ZAHLEN - 0810821



ZBF 5,LGS:UNGERADE ZAHLEN - 0810863



ZBF 5,QR:FORTL.ZAHLEN - 0808697



Device marking

ZBN 18:UNBEDRUCKT - 2809128



Mounting material

Surge protection device - PT-IQ-5-HF-5DC-PT - 2801291

accessories

E/ME TBUS NS35 GY - 2713780



PCB plug

FK-MC 0,5/ 5-ST-2,5 - 1881354



accessories

ZBF 15:SO/CMS - 0814717



ZBF 5:SO/CMS - 0808707




ZBN 18:SO/CMS - 0800763



Drawings

Surge protection device - PT-IQ-5-HF-5DC-PT - 2801291

Dimensioned drawing

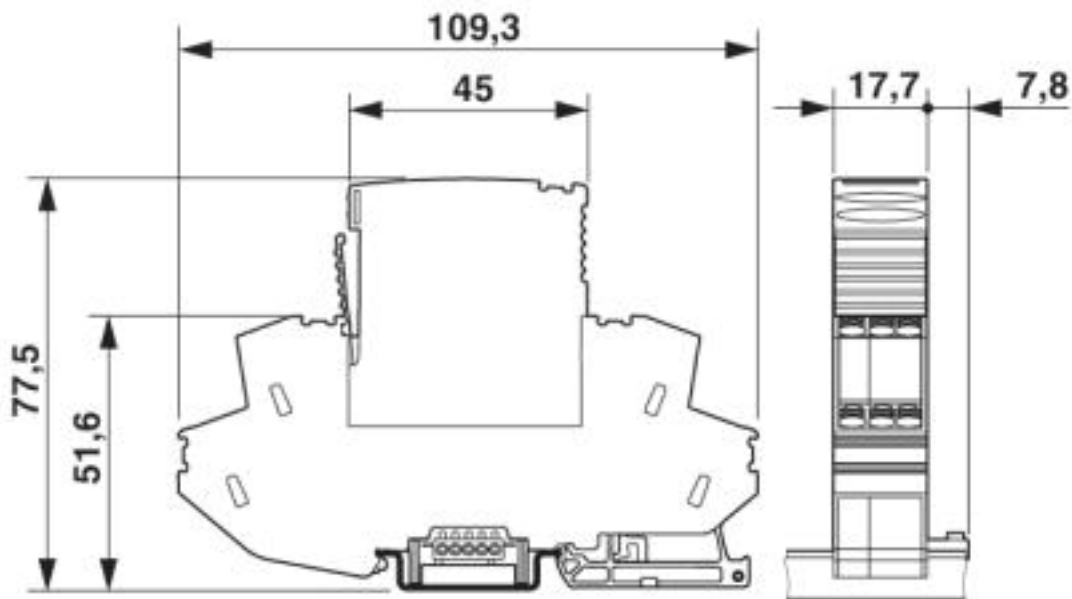

Circuit diagram

