DATASHEET - T0-3-8342/I1/SVB



Main switch, T0, 20 A, surface mounting, 3 contact unit(s), 6 pole, Emergency switching off function, With red rotary handle and yellow locking ring, Lockable in the 0 (Off) position



T0-3-8342/I1/SVB Part no.

Catalog No. 207159

EL-Nummer 0001457791

(Norway)

Delivery program			
Product range			Main switch maintenance switch Repair switch
Part group reference			ТО
Stop Function			Emergency switching off function
			With red rotary handle and yellow locking ring
Number of poles			6 pole
Locking facility			Lockable in the 0 (Off) position
Degree of Protection			IP65
			totally insulated
Design			surface mounting
Contact sequence			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
Switching angle		0	90
Design number			8342
Function			ION O OFF
Motor rating AC-23A, 50 - 60 Hz			
400 V	P	kW	5.5
Rated uninterrupted current	I _u	Α	20
Note on rated uninterrupted current !u			Rated uninterrupted current $\mathbf{I}_{\mathbf{U}}$ is specified for max. cross-section.
Number of contact units		contact unit(s)	3

Technical data

General			
Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204 Switch-disconnector according to IEC/EN 60947-3
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Enclosed		°C	-25 - +40
Overvoltage category/pollution degree			III/3
Rated impulse withstand voltage	U_{imp}	V AC	6000

Mechanical shock resistance		g	15
Mounting position			As required
Contacts			
Mechanical variables			
Number of poles			6 pole
Electrical characteristics			
Rated operational voltage	U _e	V AC	690
Rated uninterrupted current	I _u	Α	20
Note on rated uninterrupted current !u			Rated uninterrupted current I _u is specified for max. cross-section.
Load rating with intermittent operation, class 12			The state of the s
AB 25 % DF		x I _e	2
AB 40 % DF			
		x I _e	1.6
AB 60 % DF		x I _e	1.3
Short-circuit rating			
Fuse		A gG/gL	
Rated short-time withstand current (1 s current)	I _{cw}	A _{rms}	320
Note on rated short-time withstand current lcw			Current for a time of 1 second
Rated conditional short-circuit current	I_q	kA	6
Switching capacity			
cos φ rated making capacity as per IEC 60947-3		Α	130
Rated breaking capacity $\cos \phi$ to IEC 60947-3		Α	
230 V		Α	100
400/415 V		Α	110
500 V		Α	80
690 V		Α	60
Safe isolation to EN 61140			
between the contacts		V AC	440
Current heat loss per contact at I _e		W	0.6
Current heat loss per auxiliary circuit at I _e (AC-15/230 V)		CO	0.6
Lifespan, mechanical	Operations	x 10 ⁶	> 0.4
Maximum operating frequency	Operations/h		1200
AC			
AC-3			
Rating, motor load switch	P	kW	
220 V 230 V	Р	kW	3
230 V Star-delta	Р	kW	5.5
400 V 415 V	Р	kW	5.5
400 V Star-delta	Р	kW	7.5
500 V	P	kW	5.5
500 V Star-delta	P	kW	7.5
690 V	P	kW	4
690 V Star-delta	P	kW	5.5
Rated operational current motor load switch			
230 V	I _e	Α	11.5
230 V star-delta		A	20
400V 415 V	l _e	A	11.5
	l _e		
400 V star-delta	l _e	A	20
500 V	l _e	Α	9
500 V star-delta	l _e	Α	15.6
690 V	l _e	Α	4.9
690 V star-delta	l _e	Α	8.5
AC-23A			
Motor rating AC-23A, 50 - 60 Hz	Р	kW	
230 V	P	kW	3

400 V 415 V	P	kW	5.5
500 V	P	kW	7.5
690 V	Р	kW	5.5
Rated operational current motor load switch			
230 V	l _e	Α	13.3
400 V 415 V	l _e	Α	13.3
500 V	l _e	Α	13.3
690 V	I _e	Α	7.6
DC			
DC-1, Load-break switches L/R = 1 ms			
Rated operational current	l _e	Α	10
Voltage per contact pair in series		V	60
DC-21A	le	Α	
Rated operational current	I _e	Α	1
Contacts		Quantity	1
DC-23A, motor load switch L/R = 15 ms			
24 V			
Rated operational current	I _e	Α	10
Contacts		Quantity	1
48 V			
Rated operational current	l _e	Α	10
Contacts		Quantity	2
60 V			
Rated operational current	l _e	Α	10
Contacts		Quantity	3
120 V			
Rated operational current	l _e	Α	5
Contacts		Quantity	3
240 V			
Rated operational current	I _e	Α	5
Contacts		Quantity	5
DC-13, Control switches L/R = 50 ms		,	
Rated operational current	I _e	Α	10
Voltage per contact pair in series		V	32
Control circuit reliability at 24 V DC, 10 mA	Fault	H _F	< 10 ⁻⁵ ,< 1 failure in 100,000 switching operations
	probability	'	< 10 ,< 1 failure in 100,000 switching operations
Terminal capacities		•	4. (4. 05)
Solid or stranded		mm ²	1 x (1 - 2,5) 2 x (1 - 2,5)
Flexible with ferrules to DIN 46228		mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 2.5)
Terminal screw			M3.5
Tightening torque for terminal screw		Nm	1
Technical safety parameters:			
Notes			B10 _d values as per EN ISO 13849-1, table C1
Rating data for approved types			
Terminal capacity			
Terminal screw			M3.5
Tightening torque		lb-in	8.83

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	20
Heat dissipation per pole, current-dependent	P _{vid}	W	0.6
Equipment heat dissipation, current-dependent	P _{vid}	W	0
Static heat dissipation, non-current-dependent	P _{vs}	W	0

Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	40
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects $$			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			UV resistance only in connection with protective shield.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switch gear must be observed. $\label{eq:constraint}$
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switch gear must be observed. $\label{eq:constraint}$
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0


Low-voltage industrial components (EG000017) / Switch disconnector (EC000216)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Switch disconnector (ecl@ss10.0.1-27-37-14-03 [AKF060013])


Version as maintenance /service switch Yes Version as safety switch Yes Version as emergency stop installation Yes Version as reversing switch No Number of switches 1 Max. rated operation voltage Ue AC V 690 Rated permanent current lu A 20 Rated permanent current at AC-23, 400 V A 3.3 Rated permanent current at AC-21, 400 V A 20 Rated short-time withstand current lcw KA 3.2 Rated operation power at AC-3, 400 V KW 5.5 Rated operation power at AC-23, 400 V KW 5.5 Switching power at 400 V KW 5.5 Switching power at 400 V KW 5.5 Conditioned rated short-circuit current Iq KA 6 Number of poles KA 6 Number of auxiliary contacts as normally closed contact K 6 Number of auxiliary contacts as change-over contact C C Number of auxiliary contacts as change-over contact C C			
Version as safety switch Yes Version as emergency stop installation Yes Version as reversing switch No Number of switches I Max. rated operation voltage Ue AC V Rated operating voltage V Rated permanent current lu A Rated permanent current at AC-23, 400 V A Rated permanent current at AC-21, 400 V A Rated permanent current low A Rated short-time withstand current low KA Rated operation power at AC-3, 400 V KW Switching power at 400 V KW Switching power at 400 V KW Conditioned rated short-circuit current lq KA Number of poles KA Number of auxiliary contacts as normally closed contact O Number of auxiliary contacts as normally open contact O Number of auxiliary contacts as change-over contact O	Version as main switch		Yes
Version as emergency stop installation Version as reversing switch Number of switches Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as normally contacts as normally open contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as normally contacts as normally contacts as normally open contact Number of auxiliary contacts as normally contacts as normally open contact Number of auxiliary contacts as normally contact as normally open contact Number of auxiliary contacts as normally contact as normally open contact Number of auxiliary contacts as normally	Version as maintenance-/service switch		Yes
Number of switches as normally open contact Number of switches Number	Version as safety switch		Yes
Number of switches 1 Max. rated operation voltage Ue AC V 690 Rated operating voltage V 690 - 690 Rated permanent current lu A 20 Rated permanent current at AC-23, 400 V A 13.3 Rated operation power at AC-3, 400 V A 20 Rated short-time withstand current lcw kA 0.32 Rated operation power at AC-23, 400 V kW 5.5 Switching power at AG-29, 400 V kW 6 Number of poles 6 6	Version as emergency stop installation		Yes
Max. rated operation voltage Ue AC Rated operating voltage V 690 - 690 Rated permanent current lu A 20 Rated permanent current at AC-23, 400 V Rated permanent current at AC-21, 400 V Rated operation power at AC-3, 400 V Rated operation power at AC-23, 400 V Roted short-time withstand current lcw Rated operation power at AC-23, 400 V RW 5.5 Switching power at 400 V Conditioned rated short-circuit current lq RA 6 Number of poles Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact O 0	Version as reversing switch		No
Rated perating voltage Rated permanent current lu Rated permanent current lu Rated permanent current at AC-23, 400 V Rated permanent current at AC-21, 400 V Rated permanent current at AC-21, 400 V Rated operation power at AC-3, 400 V Rated operation power at AC-3, 400 V Rated operation power at AC-3, 400 V Rated operation power at AC-23, 400 V Rw Switching power at 400 V Conditioned rated short-circuit current lq RAM Number of poles Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact O Number of auxiliary contacts as change-over contact O O O O O O O O O O O O O O O O O O O	Number of switches		1
Rated permanent current lu Rated permanent current at AC-23, 400 V Rated permanent current at AC-21, 400 V Rated operation power at AC-3, 400 V Rated operation power at AC-3, 400 V Rated operation power at AC-3, 400 V Rated operation power at AC-23, 400 V Rate	Max. rated operation voltage Ue AC	V	690
Rated permanent current at AC-23, 400 V Rated permanent current at AC-21, 400 V Rated operation power at AC-3, 400 V Rated short-time withstand current lcw Rated operation power at AC-23, 400 V Rated operation power at AC-23, 400 V Rated operation power at AC-23, 400 V Rw SS Switching power at 400 V kW SS Conditioned rated short-circuit current lq kA 6 Number of poles Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact O Number of auxiliary contacts as change-over contact	Rated operating voltage	V	690 - 690
Rated permanent current at AC-21, 400 V Rated operation power at AC-3, 400 V Rated short-time withstand current lcw Rated operation power at AC-23, 400 V Rated operation power at AC-23, 400 V Rated operation power at AC-23, 400 V Rated operation power at 400 V Rw S.5 Switching power at 400 V Rw S.5 Conditioned rated short-circuit current Iq Rumber of poles Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact O O O O O O O O O O O O O	Rated permanent current lu	Α	20
Rated operation power at AC-3, 400 V Rated short-time withstand current lcw Rated operation power at AC-23, 400 V Rated operation power at AC-23, 400 V Row 5.5 Switching power at 400 V Row 5.5 Conditioned rated short-circuit current lq Row 6 Number of poles Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Number of auxiliary contacts as change-over contact O Number of auxiliary contacts as change-over contact	Rated permanent current at AC-23, 400 V	Α	13.3
Rated short-time withstand current lcw Rated operation power at AC-23, 400 V Residence of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact Rated short-time withstand current lcw RA	Rated permanent current at AC-21, 400 V	Α	20
Rated operation power at AC-23, 400 V kW 5.5 Switching power at 400 V kW 5.5 Conditioned rated short-circuit current Iq kA 6 Number of poles 6 Number of auxiliary contacts as normally closed contact 0 Number of auxiliary contacts as normally open contact 0 Number of auxiliary contacts as change-over contact 0	Rated operation power at AC-3, 400 V	kW	5.5
Switching power at 400 V Conditioned rated short-circuit current Iq kA 6 Number of poles Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Output Number of auxiliary contacts as change-over contact Output Dumber of auxiliary contacts as change-over contact	Rated short-time withstand current lcw	kA	0.32
Conditioned rated short-circuit current Iq kA 6 Number of poles 6 Number of auxiliary contacts as normally closed contact 0 Number of auxiliary contacts as normally open contact 0 Number of auxiliary contacts as change-over contact 0	Rated operation power at AC-23, 400 V	kW	5.5
Number of poles 6 Number of auxiliary contacts as normally closed contact 0 Number of auxiliary contacts as normally open contact 0 Number of auxiliary contacts as change-over contact 0	Switching power at 400 V	kW	5.5
Number of auxiliary contacts as normally closed contact 0 Number of auxiliary contacts as normally open contact 0 Number of auxiliary contacts as change-over contact 0	Conditioned rated short-circuit current Iq	kA	6
Number of auxiliary contacts as normally open contact O Number of auxiliary contacts as change-over contact O	Number of poles		6
Number of auxiliary contacts as change-over contact 0	Number of auxiliary contacts as normally closed contact		0
	Number of auxiliary contacts as normally open contact		0
Motor drive optional No	Number of auxiliary contacts as change-over contact		0
	Motor drive optional		No

Motor drive integrated	No
Voltage release optional	No
Device construction	Complete device in housing
Suitable for ground mounting	Yes
Suitable for front mounting 4-hole	No
Suitable for front mounting centre	No
Suitable for distribution board installation	No
Suitable for intermediate mounting	No
Colour control element	Red
Type of control element	Door coupling rotary drive
Interlockable	Yes
Type of electrical connection of main circuit	Screw connection
Degree of protection (IP), front side	IP65
Degree of protection (NEMA)	Other

Dimensions

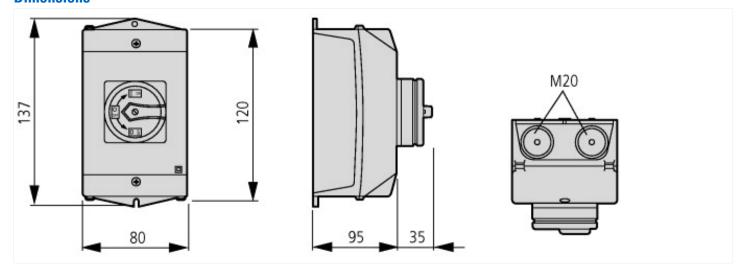

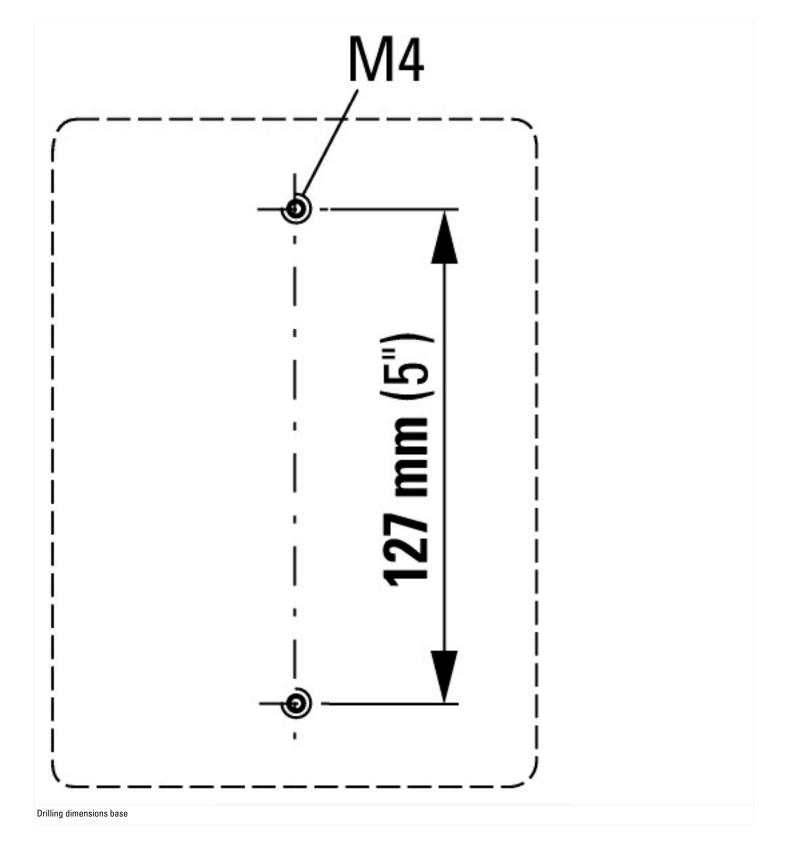

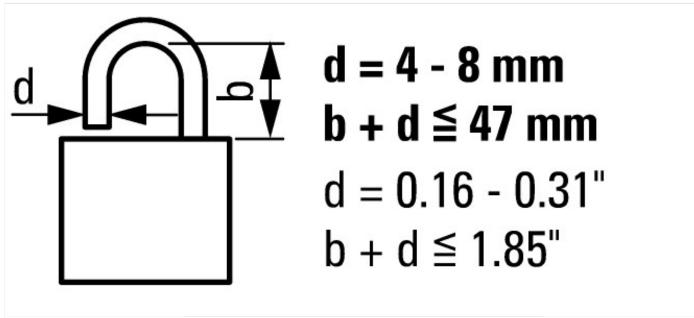

≦3 padlocks