

Surge protection connector - PT 2X1-24DC/FM-ST - 2920120

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Surge protection plug with integrated diagnostic and status indicator on the module and remote indication contact for two signal wires with common reference potential. Nominal voltage: 24 V DC

Product Features

- ✓ Plugs can be checked with CHECKMASTER
- ✓ Maximum ease of maintenance thanks to the two-piece design
- ✓ Base element remains an integral part of the installation
- ✓ With floating remote indication contact
- ✓ Consistent plug-in signal circuit protection
- ✓ Permanent and independent monitoring by a diagnostics unit
- ✓ Impedance-neutral disconnection of plug for test and maintenance purposes
- ✓ Optical status indication for the individual arresters



Key commercial data

package_quantity	10
GTIN	4046356154079

Technical data

Dimensions

Height	45 mm
Width	17.7 mm
Depth	52 mm
Pitch unit	1 Div.
Height	90 mm
Width	17.7 mm
Depth	65.5 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Degree of protection	IP20

General

Housing material	PA 6.6
------------------	--------

Surge protection connector - PT 2X1-24DC/FM-ST - 2920120

Technical data

General

Inflammability class according to UL 94	V0
Color	black
Standards for air and creepage distances	VDE 0110-1
Standards for air and creepage distances	IEC 60664-1
Mounting type	On base element
Design	DIN rail module, two-section, divisible
Direction of action	Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground

Protective circuit

IEC test classification	C1
IEC test classification	C2
IEC test classification	C3
IEC test classification	D1
VDE requirement class	C1
VDE requirement class	C2
VDE requirement class	C3
VDE requirement class	D1
Nominal voltage U_N	24 V DC
Maximum continuous operating voltage U_C	28 V DC
Maximum continuous operating voltage U_C	20 V AC
Maximum continuous voltage U_C (wire-ground)	28 V DC
Maximum continuous voltage U_C (wire-ground)	20 V AC
Nominal current I_N	300 mA (45°C)
Operating effective current I_C at U_C	$\leq 5 \mu A$
Residual current I_{PE}	$\leq 1 \mu A$ (BE: 2x1+F)
Residual current I_{PE}	$\leq 10 \mu A$ (Directly grounded)
Nominal discharge current I_n (8/20) μs (Core-Earth)	10 kA
Total surge current (8/20) μs	20 kA
Max. discharge current I_{max} (8/20) μs maximum (Core-Earth)	10 kA
Nominal pulse current I_{an} (10/1000) μs (Core-Earth)	33 A (25 °C)
Impulse discharge current (10/350) μs , peak value I_{imp}	2.5 kA (per path)
Output voltage limitation at 1 kV/ μs (Core-Earth) spike	$\leq 50 V$
Output voltage limitation at 1 kV/ μs (Core-Earth) spike	$\leq 600 V$ (BE: 2x1+F)
Output voltage limitation at 1 kV/ μs (Core-GND) spike	$\leq 50 V$
Output voltage limitation at 1 kV/ μs (Core-Earth) static	$\leq 40 V$
Output voltage limitation at 1 kV/ μs (Core-GND) static	$\leq 40 V$
Residual voltage at I_n , (conductor-ground)	$\leq 40 V$
Residual voltage with I_{an} (10/1000) μs (conductor-ground)	$\leq 50 V$
Voltage protection level U_p (Core-Earth)	$\leq 40 V$ (C1 (500 V/250 A))
Voltage protection level U_p (Core-Earth)	$\leq 40 V$ (C3 (25 A))

Surge protection connector - PT 2X1-24DC/FM-ST - 2920120

Technical data

Protective circuit

Voltage protection level U_p (Core-GND)	≤ 40 V (C1 (500 V/250 A))
Voltage protection level U_p (Core-GND)	≤ 40 V (C3 (25 A))
Response time t_A (Core-Earth)	≤ 1 ns
Input attenuation a_E , asym.	typ. 0.5 dB (≤ 1 MHz / 50 Ω)
Input attenuation a_E , asym.	typ. 0.2 dB (≤ 400 kHz / 150 Ω)
Cut-off frequency f_g (3 dB), asym. (GND) in 50 Ohm system	typ. 6 MHz
Cut-off frequency f_g (3 dB), asym. (GND) in 150 Ohm system	typ. 2.5 MHz
Resistance in series	4.7 Ω (7-8/11-12)
Max. required back-up fuse	315 mA (e.g. T (IEC 127-2/III))
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C2 (10 kV/5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	D1 (2.5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C3 (25 A)
Alternating current carrying capacity in acc. with IEC 61643-21 (Core-Earth)	5 A - 1 s

Connection data

Connection method	Screw connection (in connection with the base element)
Connection type IN	PLUGTRAB plug-in system
Connection type OUT	PLUGTRAB plug-in system
Screw thread	M3
Tightening torque	0.8 Nm
Stripping length	8 mm
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

Standards and Regulations

Standards/regulations	IEC 61643-21
Standards/regulations	DIN EN 61643-21

classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807

Surge protection connector - PT 2X1-24DC/FM-ST - 2920120

classifications

ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943


UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

approvals

UL Listed / GOST /

Approval details



accessories

Marker pen

X-PEN 0,35 - 0811228



Terminal marking

Surge protection connector - PT 2X1-24DC/FM-ST - 2920120

accessories

ZBF 5:UNBEDRUCKT - 0808642



ZBF 5/WH-100:UNBEDRUCKT - 0808668



Labeled terminal marker

ZBF 5,LGS:FORTL.ZAHLEN - 0808671



ZBF 5,LGS:GERADE ZAHLEN - 0810821



ZBF 5,LGS:UNGERADE ZAHLEN - 0810863



Surge protection connector - PT 2X1-24DC/FM-ST - 2920120

accessories

ZBF 5,QR:FORTL.ZAHLEN - 0808697



Device marking

ZBN 18:UNBEDRUCKT - 2809128



accessories

ZBF 15:SO/CMS - 0814717



ZBF 5:SO/CMS - 0808707




ZBN 18:SO/CMS - 0800763



Drawings

Surge protection connector - PT 2X1-24DC/FM-ST - 2920120

Dimensioned drawing

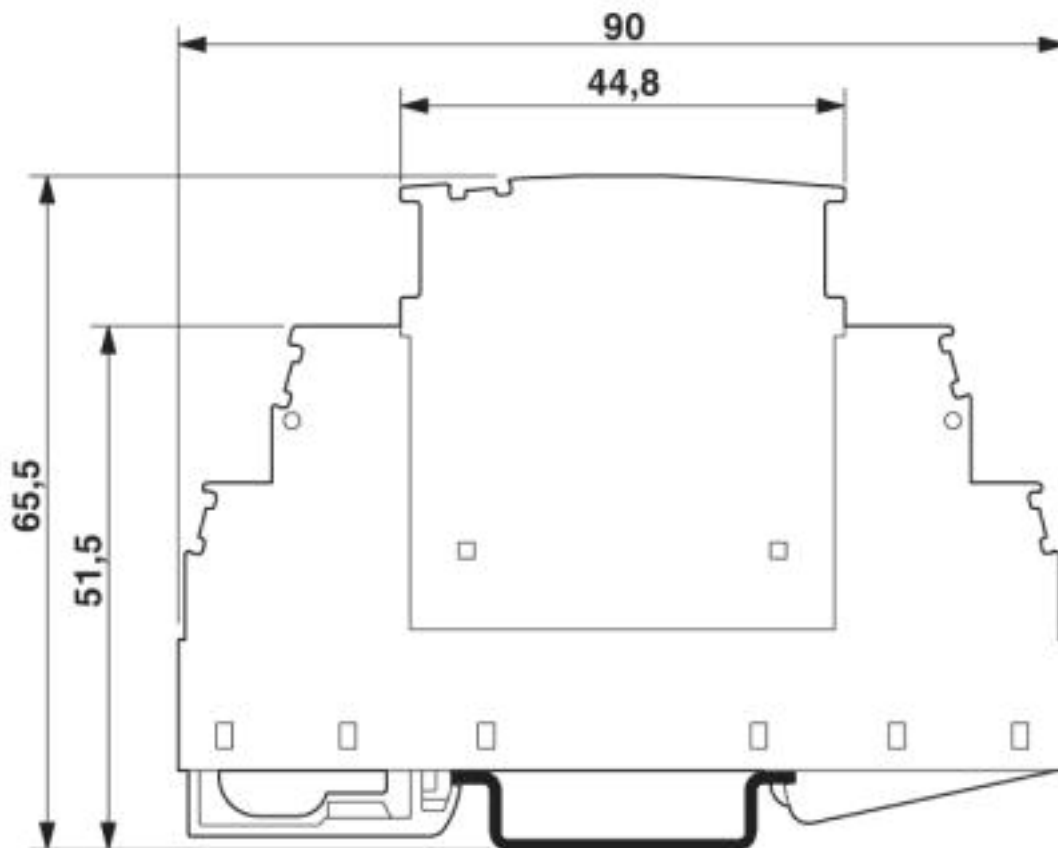

The figure shows the complete module consisting of a base element and connector

Circuit diagram

